



**OPTONICA**

**LED Lighting for Everyone**

**Catalogue  
2024<sub>v2</sub>**

# OPTONICA LED

## Who we are:

OPTONICA is a dynamically evolving trade mark, registered in 2011 on the Bulgarian market and a leader in the technologies of the future: LED LIGHTING! We are a team of highly qualified specialists, always perfecting our knowledge and exploring the world of the rapidly developing LED technologies.

## Mission:


Our main goal is to serve and cater for the needs of our potential clients and partners with a large variety and quantity of LED products.. We are sure of the quality of our products and guarantee that our services do not have an alternative, thus making us an indicator and an absolute priority in the precision and execution of our work.

## Scope of work:





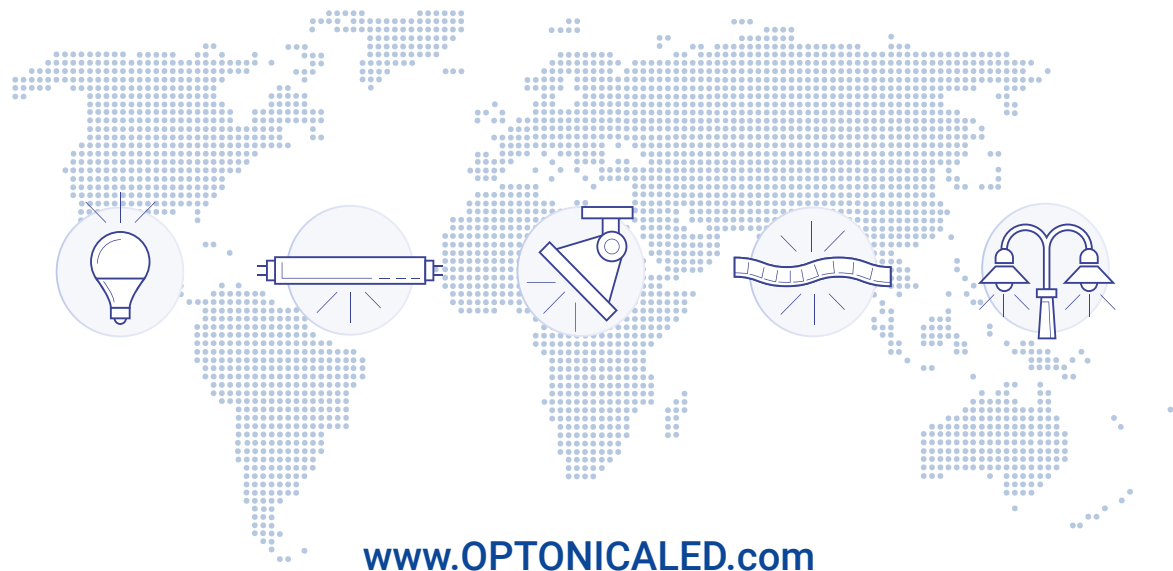


Our company is a main importer and provider of the richest and most versatile range of LED products. We work with established manufacturers, leaders in the field of the industrial LED revolution.

## What we offer:

- New generation of LED lighting with a wide range of application: homes, offices, stores, restaurants, hotels, public and administrative buildings, hospitals, schools, gas stations, trade and industrial building, parks, sport halls and stadiums, lawns, garages and parking lots, billboards and commercial constructions.
- Uncompromising quality and up to 5 year warranty.
- Ecological products and 100% recycling.
- Wide range of products and optimum stock.
- Attractive and reliable terms for partners and distributors.
- Professional attitude and responsibility towards every engagement.



[www.OPTONICALED.com](http://www.OPTONICALED.com)

	Solar Systems  08-35
	LED Spots and Bulbs  38-101
	Fixtures for Spotlights  75-95
	LED Tubes T5, T8  104-113
	LED Fixtures & Batten Lights  114-123
	LED Emergency Lights  126-129
	LED Surface Panels  132-139



LED Ceiling & Pendants

142-171



LED Panels & Mini Panels

174-205



LED Downlights

208-215



LED Strips  
LED Flex Neon  
SMD Modules

218-261




LED Power Supplies

264-277



LED Controllers & Accessories

280-301

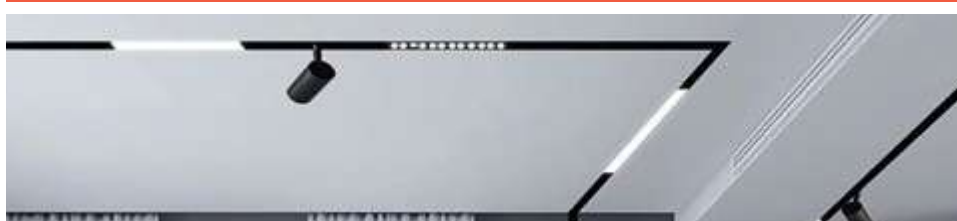

LED Linear & Track Lights

304-333



LED Floodlights

336-371



LED Industrial & Street Lights

374-404



LED Wall & Step Lights

405-425



LED Outdoor & Garden lights

428-457



LED Motion Sensors

460-469






























































LED Displays & Stage Effects

472-545



OPTONICA Comfort Products


546-565

 E27	E27 Socket Base	<b>8W</b>	Wattage in W	 45°	Tilt angle		Impact Protection		RGB Colors		UV Protection
 E14	E14 Socket Base	<b>810</b> Lumens	Total luminous flux		Motion sensor		Recyclable plastic		Higher CRI		Fast charging
 GU10	GU10 Socket Base	<b>HIGH</b> Lumens	High luminous flux		ON/OFF switch		Fan included		Voice assistant		Power surges protection
 GU5.3	MR16 Socket Base	<b>160</b> Lumen/W	Flux per Wattage		DC Current Output		Improved Driver		Voice assistant		Plug type
 G4	G4 Socket Base		Dimmable		GU10 Holder included		E27 Socket Base		APP control		USB included
 G9	G9 Socket Base		Non-dimmable		E27 Holder included		Magnetic attachment		Certificate passed		Wireless charger
 B22	B22 Socket Base		Nonwaterproof		Solar Panel included		Open cable, in length		German standard		Operating current
 B15	B15 Socket Base		Waterproof		Battery included		Linkable products		Fire-resistance rating		Flame Machine
 G5.3	G5.3 Socket Base	<b>3 PCS</b> PACK	Pcs per box/set		Rechargeable battery		Eye care LED		Emergency light		Confetti Machine
 GX53	GX53 Socket Base		Beam angle in degrees		Roll length in m.		Music control		MAX operating power		Fog Machine
<b>5</b> Years Warranty	Warranty Period		Cutout size		SMD diodes per m.	<b>M35</b> TRACK	Track Base width		Rechargeable cycles		Haze Machine



## OPTONICA

### SOLAR POWER SYSTEM

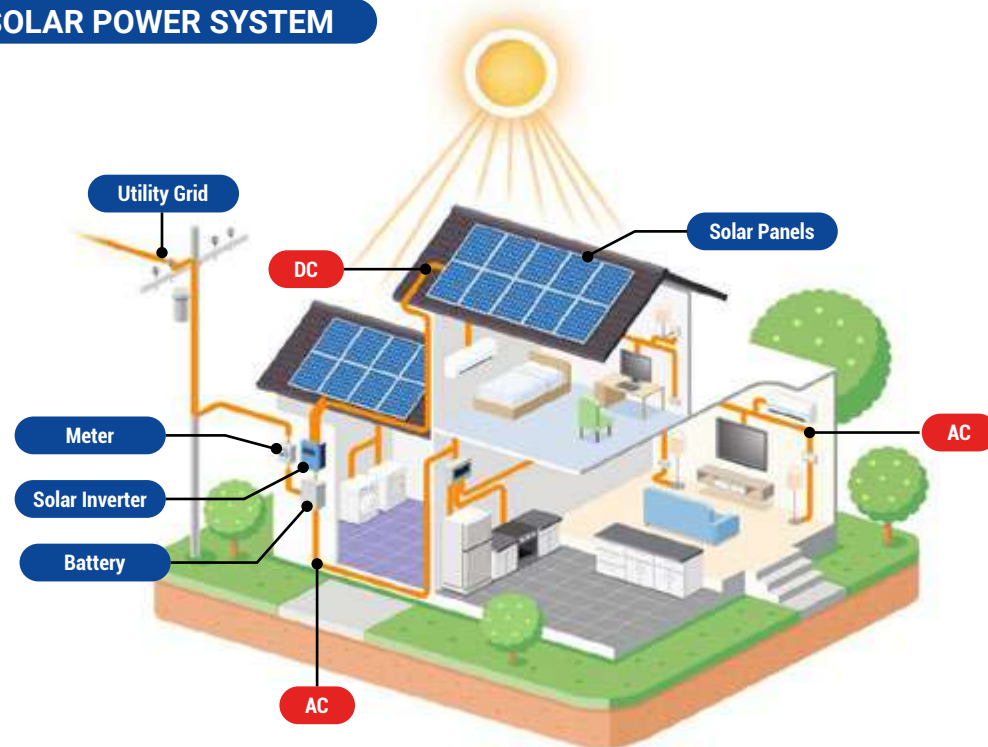

#### What components make up a solar panel system?

Solar panel installations are very straightforward systems. There are only four main components to any solar panel system, and no moving parts, making them very efficient to install and maintain. The four components of a solar panel system are:

**Solar photovoltaic panels**—to convert solar energy into electricity

**Battery**—to store DC electricity

**Inverters**—to convert DC electricity into AC electricity

**Racking and mounting systems**—to affix your solar panels to your roof (or to the ground, depending upon your installation type)

**Performance monitoring systems**—to track and monitor the output and health of your solar panels and inverters

## OPTONICA

### SOLAR POWER PRODUCTS



#### How does solar power work?

Solar power works by converting energy from the sun into power. There are two forms of energy generated from the sun for our use – electricity and heat.

Both are generated through the use of solar panels, which range in size from residential rooftops to 'solar farms' stretching over acres of rural land.

#### Is solar power a clean energy source?

Yes, solar power is a renewable and infinite energy source that creates no harmful greenhouse gas emissions – as long as the sun continues to shine, energy will be released.

The carbon footprint of solar panels is already quite small, as they last for 25 years plus with no loss in efficiency. And the materials used in the panels are increasingly recycled, so the carbon footprint will continue to shrink.

#### When was solar power discovered?

Solar energy was used by humans as early as the 7th century B.C., when humans used sunlight to light fires by reflecting the sun's rays onto shiny objects. Later, in 3rd century B.C., the Greeks and Romans harnessed solar power with mirrors to light torches for religious ceremonies.

In 1839 and at the age of just 19, French physicist Edmond Becquerel discovered the photovoltaic (PV) effect while experimenting with a cell made of metal electrodes in a conducting solution. He noted that the cell produced more electricity when it was exposed to light – it was a photovoltaic cell.

In 1954 PV technology was born when Daryl Chapin, Calvin Fuller and Gerald Pearson developed the silicon PV cell at Bell Labs in 1954 – the first solar cell capable of absorbing and converting enough of the sun's energy into power to run everyday electrical equipment.

Today satellites, spacecraft orbiting Earth, are powered by solar energy.

#### How exactly is electricity from solar energy produced?

Solar panels are usually made from silicon installed in a metal panel frame with a glass casing. When photons, or particles of light, hit the thin layer of silicon on the top of a solar panel, they knock electrons off the silicon atoms.

This PV charge creates an electric current (specifically, direct current or DC), which is captured by the wiring in solar panels. This DC electricity is then converted to alternating current (AC) by an inverter. AC is the type of electrical current used when you plug appliances into normal wall sockets.

## PORTABLE POWER STATION

PURE SINE WAVE AC OUTPUT

**OPTONICA**  
 SOLAR 


### 400W

Cell Capacity: 400W/320Wh  
 DC Input: 12V-24V/0-10A (120W Max)  
 AC Output: 230Vac 400W  
 DC Output: 12V/0-10A  
 Cigar Socket Output: 13.3V/10A  
 USB-A Output: 5V/2.4A  
 USB-C Output: 20V/3A max  
 LED Flashlight: 3W

**SKU: 9418**

### 600W

Cell Capacity: 600W/512Wh  
 DC Input: 12V-24V/0-10A (120W Max)  
 AC Output: 230Vac 600W  
 DC Output: 12V/0-10A  
 Cigar Socket Output: 13.3V/10A  
 USB-A Output: 5V/2.4A  
 USB-C Output: 20V/5A max  
 LED Flashlight: 3W

**SKU: 9419**

### 1000W

Cell Capacity: 1000W/1036.8Wh  
 DC Input: 12V-24V/0-10A (200W Max)  
 AC Output: 230Vac 1000W  
 DC Output: 12V/0-10A  
 Cigar Socket Output: 13.3V/10A  
 USB-A Output: 5V/2.4A  
 USB-C Output: 20V/5A max  
 LED Flashlight: 3W

**SKU: 9420**

### 2000W

Cell Capacity: 2000W/2096Wh  
 DC Input: 12V-65V/0-10A (650W Max)  
 AC Output: 230Vac 2000W  
 DC Output: 12V-65V/0-10A  
 Cigar Socket Output: 13V/10A  
 USB-A Output: 5V/2.4A  
 USB-C Output: 20V/5A max  
 LED Flashlight: 3W  
 Wireless Charge: (20W Max)

**SKU: 9421**


#### Bags for Portable Starion

For 400W - SKU: 9429  
 For 600W - SKU: 9428  
 For 1000W - SKU: 9422  
 For 2000W - SKU: 9423


**IDEAL FOR OUTDOOR & RECREATION**
**OPTONICA**  
 SOLAR 


### MONOCRYSTALLINE PORTABLE SOLAR PANEL 120W

Convert Efficiency: up to 21%  
 ETFE high Light Transmittance Film  
 Output: 1. MC4 18V/6.6A Max  
 2. USB-A QC 3.0 24W Max  
 3. Type-C: PD45W Max  
 Material: PET Monocrystalline solar panel  
 Intelligent charging chip

**SKU: 9400**


### MONOCRYSTALLINE PORTABLE SOLAR PANEL 200W

Convert Efficiency: up to 21%  
 ETFE high Light Transmittance Film  
 Output: 1. MC4 18V/11.1A Max  
 2. USB-A QC 3.0 24W Max  
 3. Type-C: PD45W Max  
 Material: PET Monocrystalline solar panel  
 Intelligent charging chip

**SKU: 9401**


### MONOCRYSTALLINE PORTABLE SOLAR PANEL 400W

Convert Efficiency: up to 21%  
 ETFE high Light Transmittance Film  
 Output: MC4 36V/6.6A Max  
 Material: PET Monocrystalline solar panel  
 Intelligent charging chip

**SKU: 9402**



## OPTONICA PV SOLAR PANELS



## OPTONICA PV SOLAR PANELS




### MONOCRYSTALLINE SOLAR PV MODULE

### 410W

PV Model	FV410-A1	<b>SKU:9404</b>
Rated Maximum Power (Pmax)		410W
Power Sorting		0~+5W
Voltage at Pmax (Vmp)		31.40V
Current at Pmx (IMP)		13.06A
Open-Circuit Current (Voc)		37.30V
Short-Circuit Current (Isc)		13.93A
Pv Module Clasification		CLASS II
Maximum System Voltage		1500V
Maximum Series Fuse Rating		25A
Operating Temperature		-40~85° C
Dimensions (mm)	1722x1134x30mm	
Pmax /Voc / Isc Tolerance		± 3%

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°

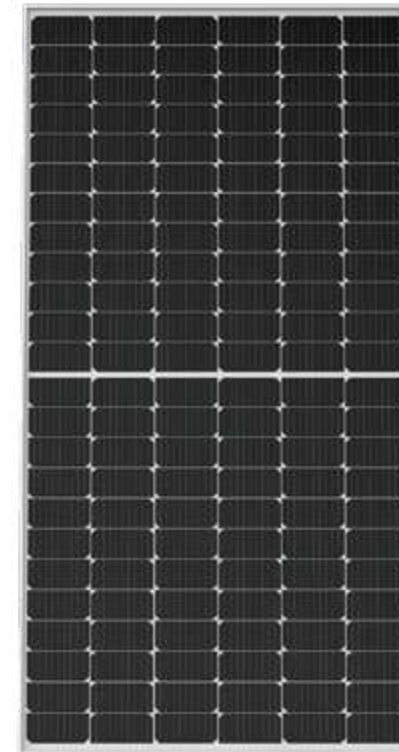

### MONOCRYSTALLINE SOLAR PV MODULE

### 450W

PV Model	FV450-A1	<b>SKU:9403</b>
Rated Maximum Power (Pmax)		450W
Power Sorting		0~+5W
Voltage at Pmax (Vmp)		42.10V
Current at Pmx (IMP)		10.69A
Open-Circuit Current (Voc)		49.84V
Short-Circuit Current (Isc)		11.20A
Pv Module Clasification		CLASS II
Maximum System Voltage		1500V
Maximum Series Fuse Rating		15A
Operating Temperature		-40~85° C
Dimensions (mm)	2094x1038x35mm	
Pmax /Voc / Isc Tolerance		± 3%

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°



### Micro Inverter

1. Input: 2\*MC4 / PV 2\*210-400W
2. Output: 230Vac 600W
3. MPPT 25-55V 2\*13A
4. Unit: 212\*230\*40mm 3.15kg
5. IP67

**SKU: 9431**

**SKU: 9424**



**SKU: 9425**



**SKU: 9426**



**SKU: 9427**



## PV SOLAR PANELS



### MONOCRYSTALLINE SOLAR PV MODULE

### 410W

PV Model	FV410-A1	<b>SKU:9406</b>
Rated Maximum Power (Pmax)	410W	
Power Sorting	0~+5W	
Voltage at Pmax (Vmp)	34.89V	
Current at Pmx (IMP)	11.76A	
Open-Circuit Current (Voc)	41.90V	
Short-Circuit Current (Isc)	12.47A	
Pv Module Clasification	CLASS II	
Maximum System Voltage	1500V	
Maximum Series Fuse Rating	20A	
Operating Temperature	-40~85° C	
Dimensions (mm)	1754x1096x30mm	
Pmax /Voc / Isc Tolerance	± 3%	

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°



SKU: 9451,9453



4 mm<sup>2</sup> ; 6 mm<sup>2</sup>

SKU: 9452,9454



4 mm<sup>2</sup> ; 6 mm<sup>2</sup>

SKU: 9457



SKU: 9458



## PV SOLAR PANELS



### MONOCRYSTALLINE SOLAR PV MODULE

### 450W

PV Model	FV450-A1	<b>SKU:9407</b>
Rated Maximum Power (Pmax)	450W	
Power Sorting	0~+5W	
Voltage at Pmax (Vmp)	41.30V	
Current at Pmx (IMP)	10.90A	
Open-Circuit Current (Voc)	49.70V	
Short-Circuit Current (Isc)	11.50A	
Pv Module Clasification	CLASS II	
Maximum System Voltage	1500V	
Maximum Series Fuse Rating	20A	
Operating Temperature	-40~85° C	
Dimensions (mm)	2108x1048x35mm	
Pmax /Voc / Isc Tolerance	± 3%	

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°



SKU: 9455 ; 9456



SKU: 9434



### PV POWER OPTIMIZER



SKU: 9464



## PV SOLAR PANELS



### MONOCRYSTALLINE SOLAR PV MODULE

## 445W

PV Model	FV445-A1	<b>SKU:9408</b>
Rated Maximum Power (Pmax)		445W
Power Sorting		0~+5W
Voltage at Pmax (Vmp)		45.09V
Current at Pmx (IMP)		12.57A
Open-Circuit Current (Voc)		37.54V
Short-Circuit Current (Isc)		11.86A
Pv Module Clasification		CLASS I
Maximum System Voltage		1500V
Maximum Series Fuse Rating		20A
Operating Temperature		-40~85° C
Dimensions (mm)		1894x1096x30mm
Pmax /Voc / Isc Tolerance		± 3%

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°



## PV SOLAR PANELS



### MONOCRYSTALLINE SOLAR PV MODULE

## 550W

PV Model	FV550-A1	<b>SKU:9405</b>
Rated Maximum Power (Pmax)		550W
Power Sorting		0~+5W
Voltage at Pmax (Vmp)		42.20V
Current at Pmx (IMP)		13.04A
Open-Circuit Current (Voc)		49.80V
Short-Circuit Current (Isc)		13.94A
Pv Module Clasification		CLASS II
Maximum System Voltage		1500V
Maximum Series Fuse Rating		25A
Operating Temperature		-40~85° C
Dimensions (mm)		2279x1134x35mm
Pmax /Voc / Isc Tolerance		± 3%

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°



## PV SOLAR PANELS



### MONO HALF-CUT MODULE BLACK FRAME **405W**

**UL-405-108HV**
**MBB 182mm Cell**

PV Model	<b>SKU:9411</b>
Rated Maximum Power (Pmax)	405W
Power Sorting	0~+5W
Voltage at Pmax (Vmp)	31.3V
Current at Pmx (IMP)	12.94A
Open-Circuit Current (Voc)	37.3V
Short-Circuit Current (Isc)	13.69A
Module Efficiency STC	20.74
Maximum System Voltage	1500V
Maximum Series Fuse Rating	25A
Operating Temperature	-40~85° C
Dimensions (mm)	2279/1134/35mm
Pmax /Voc / Isc Tolerance	± 3%

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°



**Lower LCOE**  
 Lower shading and resistive loss  
 Lower temperature coefficient



**Anti-PID(potential induced degradation)**  
 Passed anti-PID test under 85% damp heat,  
 85% relative humidity for 96 hours



## PV SOLAR PANELS



### MONO HALF-CUT MODULE SILVER FRAME **455W**

**UL-455M-144HV**
**MBB 166mm Cell**

PV Model	<b>SKU:9410</b>
Rated Maximum Power (Pmax)	455W
Power Sorting	0~+5W
Voltage at Pmax (Vmp)	41.1V
Current at Pmx (IMP)	11.07A
Open-Circuit Current (Voc)	49.9V
Short-Circuit Current (Isc)	11.64A
Module Efficiency STC	20.93
Maximum System Voltage	1500V
Maximum Series Fuse Rating	20A
Operating Temperature	-40~85° C
Dimensions (mm)	2094x1038x35mm
Pmax /Voc / Isc Tolerance	± 3%

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°



**Lower LCOE**  
 Lower shading and resistive loss  
 Lower temperature coefficient



**Anti-PID(potential induced degradation)**  
 Passed anti-PID test under 85% damp heat,  
 85% relative humidity for 96 hours



## PV SOLAR PANELS



### BIFACIAL MONO PERC MODULE

## 550W

**UL-550M-144HV**
**MBB 182mm Cell**

PV Model	<b>SKU:9412</b>
Rated Maximum Power (Pmax)	550W
Power Sorting	0~+5W
Voltage at Pmax (Vmp)	41.9V
Current at Pmx (IMP)	13.13A
Open-Circuit Current (Voc)	50V
Short-Circuit Current (Isc)	13.75A
Module Efficiency STC	21.28
Maximum System Voltage	1500V
Maximum Series Fuse Rating	30A
Operating Temperature	-40~85° C
Dimensions (mm)	2279/1134/35mm
Pmax /Voc / Isc Tolerance	± 3%

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°



**Lower LCOE**  
 Lower shading and resistive loss  
 Lower temperature coefficient



**Anti-PID(potential induced degradation)**  
 Passed anti-PID test under 85% damp heat, 85% relative humidity for 96 hours

PRODUCT  
 GUARANTEE  
 UP TO  
**25**  
 YEARS

## PV SOLAR PANELS



### DOUBLE-GLASS BIFACIAL MODULE

## N-TYPE 570 TOPCON

**UL-570M-144DG**
**MBB 182mm Cell**

PV Model	<b>SKU:9413</b>
Rated Maximum Power (Pmax)	570W
Power Sorting	0~+5W
Voltage at Pmax (Vmp)	42.2/
Current at Pmx (IMP)	13.51
Open-Circuit Current (Voc)	50.7
Short-Circuit Current (Isc)	14.23
Module Efficiency STC	22.07%
Maximum System Voltage	1500V
Maximum Series Fuse Rating	30A
Operating Temperature	-40~85° C
Dimensions (mm)	2278/1134/35mm
Pmax /Voc / Isc Tolerance	± 3%

Tested at STC:1000W/m ; AM1.5; Cell temperature 25C°



**Lower LCOE**  
 Lower shading and resistive loss  
 Lower temperature coefficient



**Anti-PID(potential induced degradation)**  
 Passed anti-PID test under 85% damp heat, 85% relative humidity for 96 hours

PRODUCT  
 GUARANTEE  
 UP TO  
**25**  
 YEARS



### Double Headed Electric Photovoltaic Brush 5.5M Glass Fiber Handle AC220 or 110V AC

Applicable Voltage	110-240V	Material	Alu/Carbon fiber
Utilization Voltage	24V	Wall thickness	1-1.2mm
Power	52.8W*2	Diameter	43mm
Speed	128rpm	Length	5.5m
Torsion	1.2 N.m	Brush Size	280mm

SKU: 9656



#### Accessories

**Battery\*1**  
**Adapter\*1**  
**Water pipe and accessories\*1**  
**Backpack\*1**  
**Push button switch spring wire\*1**  
**Telescopic rod\*1**  
**Brush head assembly\*1 set**  
**(including 1 pcs brush discs)**

SKU: 9657 - DC24 Supply(Battery)



### Solar Panel Cleaning Robot - Watering



#### SINGLE SOLAR PANEL CLEANING ROBOT 2384mm 150W 24V10Ah

SKU: 9658

PV Module Range	2384mm Single PV Panel
Traveling Speed	15-20 m/min
Generator Power	150W
Water Used Per Hour	330L/H
Solar Panel(W)	27W
Batery Capacity(Ah)	24V/10Ah
Cleaning Mode	Dry/Watering Cleaning
Other Functions	Speed Adjust/Direction Adjust

#### DOUBLE SOLAR PANEL CLEANING ROBOT 2384mm 200W 24V20Ah

SKU: 9659

PV Module Range	2384mm Double PV Panel
Traveling Speed	15-20 m/min
Generator Power	200W
Water Used Per Hour	330L/H
Solar Panel(W)	27W
Batery Capacity(Ah)	24V/10Ah
Cleaning Mode	Dry/Watering Cleaning
Other Functions	Speed Adjust/Direction Adjust



## ONE-PHASE HYBRID INVERTERS

3.6kW

5kW

6kW



Model	SKU: 9446	SKU: 9437	SKU: 9438
<b>Battery Input Data</b>			
Battery Type	Lead-acid or Lithium-ion		
Battery Voltage Range (V)	40-60		
Max. Charging Current (A)	90	120	135
Max. Discharging Current (A)	90	120	135
Charging Strategy for Li-ion Battery	Self-adaption to BMS		
<b>PV String Input Data</b>			
Max. DC Input Power (W)	4680	6500	7800
Max. DC Input Voltage (V)	500	(125-500)	
Start-up Voltage (V)	125		
MPPT Voltage Range (V)	150-425		
Rated DC Input Voltage (V)	370		
Max. Operating PV Input Current (A)	13+13		
Max. Input Short-Circuit Current (A)	17+17		
No. of MPP Trackers/ No. of Strings per MPP Tracker	2/1+1		
<b>AC Input/Output Data</b>			
Rated AC Input/Output Active Power (W)	3600	5000	6000
Max. AC Input/Output Apparent Power (VA)	3960	5500	6000
Rated AC Input/Output Current (A)	16.4/15.7	22.7/21.7	27.3/26.1
Max. AC Input/Output Current (A)	18/17.2	25/23.9	30/28.7
Max. Continuous AC Passthrough (grid to load) (A)	35	40	40
Peak Power (off-grid) (W)	2 times of rated power, 10s		
Power Factor Adjustment Range	0.8 leading to 0.8 lagging		
Rated Input/Output Voltage/Range (V)	220/230 0.85Un-1.1Un		
Rated Input/Output Grid Frequency/Range(Hz)	50/45-55 , 60/55-65		
Grid Connection Form	L+N+PE		
Total Current Harmonic Distortion THDi	<3% (of nominal power)		
DC Injection Current	<0.5% In		



## THREE-PHASE HYBRID INVERTERS

8kW

10kW



Model	SKU: 9436	SKU: 9435
<b>Battery Input Data</b>		
Battery Type	Lead-acid or Li-Ion	
Battery Voltage Range (V)	40~60	
Max. Charging Current (A)	190	210
Max. Discharging Current (A)	190	210
External Temperature Sensor	Yes	
Charging Curve	3 Stages / Equalization	
Charging Strategy for Li-Ion Battery	Self-adaption to BMS	
<b>PV String Input Data</b>		
Max. DC Input Power (W)	10400	13000
Rated PV Input Voltage (V)	550 (160~800)	
Start-up Voltage (V)	160	
MPPT Voltage Range (V)	200-650	
Full Load DC Voltage Range (V)	350-650	
PV Input Current (A)	13+13	26+13
Max. PV I <sub>sc</sub> (A)	17+17	34+17
No. of MPP Trackers	2	
No. of Strings per MPP Tracker	1	2+1
<b>AC Output Data</b>		
Rated AC Output and UPS Power (W)	8000	10000
Max. AC Output Power (W)	8800	11000
AC Output Rated Current (A)	12.1/11.6	15.2/14.5
Max. AC Current (A)	18.2/17.4	22.7/21.7
Max. Continuous AC Passthrough (A)	45	
Peak Power (off grid)	2 time of rated power, 10 S	
Power Factor	0.8 leading to 0.8 lagging	
Output Frequency and Voltage	50/60Hz; 3L/N/PE 220/380, 230/400Vac	
Grid Type	Three Phase	
Total Harmonic Distortion (THD)	<3% (of nominal power)	
DC current injection	<0.5% In	

## THREE-PHASE HYBRID INVERTERS

20kW      30kW      50kW



Model	SKU: 9442	SKU: 9443	SKU: 9444
<b>Battery Input Data</b>			
Battery Type	Lithium-ion		
Battery Voltage Range (V)	160~700	160-800	
Max. Charging Current (A)	37	50+50	
Max. Discharging Current (A)	37	50+50	
Number of Battery Input	1	2	
Charging Strategy for Li-Ion Battery	Self-adaption to BMS		
<b>PV String Input Data</b>			
Max. DC Input Power (W)	26000	39000	65000
Max. DC Input Voltage (V)	1000		
Start-up Voltage (V)	180		
MPPT Range (V)	150-850		
Full Load DC Voltage Range (V)	500-850	360-850	450-850
Rated DC Input Voltage (V)	600		
PV Input Current (A)	26+26	36+36+36	36+36+36+36
Max. PV I <sub>sc</sub> (A)	39+39	55+55+55	55+55+55+55
No. of MPP Trackers	2	3	4
No. of Strings per MPP Tracker	2+2	2+2+2	2+2+2+2
<b>AC Output Data</b>			
Rated AC Output Active Power (W)	20000	30000	50000
Max AC Output Active Power (W)	22000	33000	55000
AC Output Rated Current (A)	30.4/29	45.5/43.5	75.8/72.5
Max. AC Output Current (A)	33.4/31.9	50/47.8	83.4/79.7
Max. Three-phase Unbalanced Output Current (A)	35	60	83.3
Max. Continuous AC Passthrough (A)	80	200	
Peak Power (Off Grid)	1.5 time of rated power, 10 S		
Generator Input/Smart Load /AC Couple Current (A)	30.4/80/30.4	45.5 / 200 / 45.5	75.8 / 200 / 75.8
Power Factor Adjustment Range	0.8 leading to 0.8 lagging		
Output Frequency and Voltage	50/60Hz; 3L/N/PE 220/380, 230/400Vac		
Grid Type	Three Phase		
Total Harmonics Current Distortion (THDi)	<3% (of nominal power)		
DC Current Injection	<0.5% I <sub>n</sub>		

## Three Phase On-Grid Solar Inverter



MODEL	SKU:9491	SKU:9492	SKU:9493	SKU:9494
<b>Input(DC)</b>	10KW	30KW	40KW	120KW
Max. DC Voltage	1100V	1100V	1100V	1100V
Nominal Voltage	620V	600V	600V	620V
Start Voltage	180V	180V	180V	250V
MPPT Voltage Range	140V~1000V	200V~1000V	200V~1000V	200V~1000V
Number of MPPT Tracker	2	3	2	10
Strings Per MPPT Tracker	1	2	1	2
Max. Input Current Per MPPT	15A	30A	30A	30A
Max. Short-circuit Current Per MPPT	20A	50A	50A	50A
<b>Output(AC)</b>				
Nominal AC Output Power	10000W	30000W	40000W	120kW
Maximum AC Output Power	11000Va	33000Va	44000Va	121kVa
Nominal AC Voltage	400V 3L+N	400V 3L+N	400V 3L+N	480V 3W+PE
AC Grid Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Maximum Output Current	16.0A	47.7A	63.6A	174.6A
Power Factor(Φ)	0.8leading-0.8lagging	0.8leading-0.8lagging	0.8leading-0.8lagging	0.8leading-0.8lagging
THDi	<3%	<3%	<3%	<3%
<b>Efficiency</b>				
Max. Efficiency	98.6%	98.7%	98.7%	98.7%
<b>General Specifications</b>				
Dimensions W x H x D	380x483x161mm	380x483x227mm	380x483x227mm	1055x700x336mm
Operating Temperature Range	-25°C~+60°C	-25°C~+60°C	-25°C~+60°C	-25°C~+60°C
Cooling Type	Natural cooling	Fan cooling	Fan cooling	Fan cooling
IP Class	IP66	IP66	IP66	IP66

## Three Phase On-Grid Solar Inverter



MODEL	SKU:9480	SKU:9481	SKU:9482
<b>Input(DC)</b>	Max 9.6KW	Max 12.8KW	Max 16KW
Max. DC Voltage	1100V	1100V	1100V
Nominal Voltage	600V	600V	600V
Start Voltage	160V	160V	160V
MPPT Voltage Range	250~850V	180V~1000V	180V~1000V
Number of MPPT Tracker	2	2	2
Strings Per MPPT Tracker	1	1	1
Max. Input Current Per MPPT	14A/14A	14A/14A	14A/14A
Max. Short-circuit Current Per MPPT	18A/18A	18A/18A	18A/18A
<b>Output(AC)</b>			
Nominal AC Output Power	6kW	8kW	10kW
Maximum AC Output Power	6.6kVA	8.8kVA	11kVA
Nominal AC Voltage	400Vac 3L/N/PE	400Vac 3L/N/PE	400Vac 3L/N/PE
AC Grid Frequency Range	50/60Hz	50/60Hz	50/60Hz
Maximum Output Current	12.8A	12.8A	15.9A
Power Factor( $\Phi$ )	0.8leading-0.8lagging	0.8leading-0.8lagging	0.8leading-0.8lagging
THDi	<3%	<3%	<3%
<b>Efficiency</b>			
Max. Efficiency	98.4%	98.7%	98.7%
<b>General Specifications</b>			
Dimensions W x H x D	481x395x195mm	481x395x195mm	481x395x195mm
Operating Temperature Range	-30°C~+60°C	-30°C~+60°C	-25°C~+60°C
Cooling Type	Natural cooling	Natural cooling	Natural cooling
IP Class	IP66	IP66	IP66

## Three Phase On-Grid Solar Inverter



MODEL	SKU:9483	SKU:9484	SKU:9485
<b>Input(DC)</b>	Max 48KW	Max 80KW	Max 150kW
Max. DC Voltage	1100V	1100V	1100V
Nominal Voltage	600V	600V	620V
Start Voltage	250V	250V	250V
MPPT Voltage Range	200V~1000V	200V~1000V	180V~1000V
Number of MPPT Tracker	3	4	9
Strings Per MPPT Tracker	2	3/2/3/2	2
Max. Input Current Per MPPT	26A	39A/26A/39A/26A	26A
Max. Short-circuit Current Per MPPT	32A	48A/32A/48A/32A	40A
<b>Output(AC)</b>			
Nominal AC Output Power	30kW	50kW	100kW
Maximum AC Output Power	33kVA	55kVA	110kVa
Nominal AC Voltage	400Vac 3L/N/PE	230Vac/400Vac	400Vac 3L/N/PE
AC Grid Frequency Range	50/60Hz	50/60Hz	50/60Hz
Maximum Output Current	48.3A	79.7A	158.8A
Power Factor( $\Phi$ )	0.8leading-0.8lagging	0.8leading-0.8lagging	0.8leading-0.8lagging
THDi	<3%	<3%	<3%
<b>Efficiency</b>			
Max. Efficiency	98.6%	98.7%	98.7%
<b>General Specifications</b>			
Dimensions W x H x D	600x430x230mm	650x450x260mm	1050x660x330mm
Operating Temperature Range	-25°C~+60°C	-25°C~+60°C	-25°C~+60°C
Cooling Type	Smart Cooling	Smart Cooling	Smart Cooling
IP Class	IP66	IP66	IP66

## ONE-PHASE HYBRID INVERTERS

XG8KTL



MODEL	SKU:9486
<b>Input(DC)</b>	Max 12KW
Max. DC Voltage	600V
Start Voltage	80V
MPPT Voltage Range	50~550V
Number of MPPT Tracker	2
Strings Per MPPT Tracker	1/1
Max. Input Current Per MPPT	20A
Max. Short-circuit Current Per MPPT	26A
<b>Output(AC)</b>	
Nominal AC Output Power	8kW
Maximum AC Output Power	8.8kVA
Nominal AC Voltage	220Vac/230Vac/240Vac
AC Grid Frequency Range	50/60Hz
Max. Efficiency	98.1%
<b>General Specifications</b>	
Dimensions W x H x D	380x380x160mm
Operating Temperature Range	-30°C~+60°C
Cooling Type	Natural cooling
IP Class	IP66

## Standard 19inch Rack for 12pcs Batteries / 1pcs Controller

SKU: 9475

Dimensions: 589x590x2240mm



## High Voltage Battery cluster control box

SKU: 9476



Operating Voltage	120~750Vdc
Nominal Charge/Discharge Current	100A
Max.Charge/Discharge Current	125A
DC Input Rating	12±2%V/4.15A
Operating Temperature Range	-20~65°C
Ingress Protection	IP20
Dimension (W/D/H)	440*570*150mm
Weight Approximate	15.5kg

## 5.12 kWh Battery module

SKU: 9477



Battery Type	LiFePO4(LFP)
Nominal Voltage	51.2Vdc
Rated Capacity	100Ah
Rated Energy	5.12kWh
Nominal Charge/Discharge Current	100A
Peak.Discharge Current	125A
Charge Temperature	0~55°C
Discharge Temperature	-20~55°C
Storage Temperature	0°C~35°C
Ingress Protection	IP20
Dimension (W/D/H)	440*570*133mm
Weight Approximate	44kg



**OPTONICA**  
 SOLAR 
**RECHARGEABLE LITHIUM BATTERY SYSTEM**
**BATTERY LiFePo4**

**10.94kWh**

**10.24kWh**

**5.12kWh**

Model	SKU:9471	SKU:9472	SKU:9473
Nominal Capacity	228Ah	200Ah	100Ah
Nominal Energy	10.94kWh	10.24kWh	5.12kWh
Nominal Voltage	48Vdc	51.2Vdc	51.2Vdc
Discharge Current	150A	150A	100A
Cell	BYD	EVE	EVE
Ingress Protection	IP65	IP65	IP65
Weight	90kg	90kg	42.2kg



SKU: 9465 - Cables Red/Black for Battery  
 9471-9473 - Length 1500mm

**Deye**
**RECHARGEABLE LITHIUM BATTERY SYSTEM**

**BATTERY LiFePo4**
**6.14kWh**

Model	SKU:9439
Nominal Capacity	120Ah
Nominal Energy	6.14kWh
Nominal Voltage	51.2Vdc
Operating Voltage Range	43.2~57.6Vdc
Nominal Charge/Discharge Current	60A
Ingress Protection	IP65
Operating Temperature(Charge)	0~+55 C°
Operating Temperature(Discharge)	-20~+55 C°
Storage Temperature	-20~+35 C°
DimensionS	475x720x145mm
Weight Approximate	58 Kg

## MULTI-FUNCTION ELECTRICAL ENERGY METERS



### Single-phase Multi-Function electrical energy meter

230V/100A/RS485/MID Certification  
**SKU: 9461**

### Three-phase Multi-Function electrical energy meter

3x230V/100A/RS485/MID certification  
**SKU: 9462**



### CT Three-phase Multi-Function electrical energy meter

3x230V/1A or 5A/RS485/MID certification  
**SKU: 9463**

## STD670V Smart Meters Kits for INVT 3-Phase Inverters (Including wires and CT SDT024TS)

**SKU: 9460**




Technical Feature	Parameters
Wiring	2P3L, 3P3L, 3P4L
Voltage	2x110V/220V, 3x57.7/100V, 3x127/220V, 3x230V/400V, 3x240/415V, 3x400/690V 3x100V, 3x230V, 3x400V, 3x690V
	Rated 0.9 ~ 1.1Un; Max 0.7 ~ 1.2Un
Current	3x5A(Ext. CT), 3x16A, 3x32A, 3x63A, 3x100A
	Consumption ≤4VA / line
Frequency	50 / 60Hz
Accuracy	U,I,P 0.2%, kWh 0.5%, kVarh 1.0%
Thermal drift	<200ppm
Energy Impulse	kWh impulse (open-collector)
	VCC<48V, I <sub>z</sub> <50mA Constant: 10imp/kWh
Isolation	2kVAC/min (input / output / power supply)
	input / housing and output / housing >50MΩ
Installation	Standard 35mm DIN rail

## CT Clamp for SMART METER

**SKU: 9466**



SKU: 9601 Rail 27\*45mm 2.2m



SKU: 9602 Rail 27\*45mm 1.2m



SKU: 9603 End Clamp for 35mm Panel



SKU: 9604 Middle Clamp



SKU: 9617 Ballasted Strip



SKU: 9618 Mini Rail - 300mm



SKU: 9619 Rail - 2400mm



SKU: 9620 Rail+Rubber Pad 70x22x380mm



SKU: 9605 Rooftop Hook



SKU: 9606 TT Nut



SKU: 9607 Screw ST6.3\*80mm



SKU: 9608 Wood Screw M6.3\*80mm



SKU: 9621 End Clamps M8x25mm for 30mm Panel



SKU: 9622 Middle Clamps Wide 20mm



SKU: 9623 End Clamp for 30mm Panel



SKU: 9624 Middle Clamp for 30mm Panel



SKU: 9609 L-Foot with M8\*25mm



SKU: 9610 Rail Joiner 200mm



SKU: 9611 Hanger Bolt with L-Foot



SKU: 9612 Adjustable front Leg



SKU: 9625 INNER HEXAGONAL BOLT 40mm



SKU: 9626 INNER HEXAGONAL BOLT 25mm



SKU: 9627 M8 Hexagonal Nut



SKU: 9628 M8 Square Nut



SKU: 9613 Adjustable rear Leg 10-15° 200mm



SKU: 9614 Adjustable rear Leg 15-30° 320mm



SKU: 9615 Grounding Plate



SKU: 9616 Adjustable Tilt Mount Bracket



SKU: 9629 Expansion Bolt 60mm



SKU: 9630 Ball Nut



SKU: 9631 Self Tapping Screw





## LED BULBS GOLDEN GLASS



Innovative line of half-glass covered bulbs combine the classic retro appearance with modern power-saving technology and creating a cosy ambience in both homes, villa or restaurants and bars.

**Features:**

- Up to 80% power saving impact
- 2500K warm white light
- Half silver or half golden cover
- E27 socket
- Stylish retro look
- Standard bulb head – A60 or G95

**Application:**

- Home use on standard sockets
- Outdoor use in enclosed fixtures
- Discrete or additional lighting




## LED Bulbs PS160 Filament

**8W E27**

GOLDEN GLASS

Watts	8W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	810lm	Dimension	ø160x315 mm
Beam Angle	270°	Body Type	PS160


 SKU: 1790  
 1800K


## LED Bulbs BD200 Filament

**8W E27**

GOLDEN GLASS

Watts	8W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	810lm	Dimension	ø200x410 mm
Beam Angle	270°	Body Type	BD200
Socket	E27	Dimmable	YES


 SKU: 1791  
 1800K


## LED Bulbs G200 Filament

**8W E27**

GOLDEN GLASS

Watts	8W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	810lm	Dimension	ø200x300 mm
Beam Angle	270°	Body Type	G200
Socket	E27	Dimmable	YES


 SKU: 1792  
 1800K


## LED Bulbs MS200 Filament

**8W E27**

GOLDEN GLASS

Watts	8W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	810lm	Dimension	ø200x210 mm
Beam Angle	270°	Body Type	MS200
Socket	E27	Dimmable	YES


 SKU: 1793  
 1800K


## LED Bulbs Filament

**4W E27**

HALF GOLDEN GLASS

Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø95x135 mm
Beam Angle	180°	Body Type	G95
Socket	E27	Dimmable	NO


 SKU: 1889  
 1800K


## LED Bulbs Filament

**4W E27**

HALF SILVER GLASS

Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø95x135 mm
Beam Angle	180°	Body Type	G95
Socket	E27	Dimmable	NO

 SKU: 1887  
 1800K



## LED Bulbs Filament

**7W E27**

HALF GOLDEN GLASS

Watts	7W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	800lm	Dimension	ø95x135 mm
Beam Angle	180°	Body Type	G95
Socket	E27	Dimmable	NO

SKU: 1890 Warm White 2700K 3800156618909




## LED Bulbs Filament

**7W E27**

HALF SILVER GLASS

Watts	7W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	800lm	Dimension	ø95x135 mm
Beam Angle	180°	Body Type	G95
Socket	E27	Dimmable	NO

 SKU: 1888  
 1800K

 SKU: 1890  
 1800K




## LED Bulbs Filament


**4W E27**

## HALF GOLDEN GLASS

Watts 4W  
 Input Voltage AC : 175-265V  
 Flux 400lm  
 Beam Angle 180°  
 Socket E27

SKU: 1893  
 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x105 mm  
 Body Type A60  
 Dimmable NO



## LED ST64 Bulbs Filament


**4W E27**

## GOLDEN GLASS

Watts 4W  
 Input Voltage AC : 220-240V  
 Flux 400lm  
 Beam Angle 270°  
 Socket E27

SKU: 1795  
 2500K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø64x140 mm  
 Body Type ST64  
 Dimmable NO



## LED Bulbs Filament


**4W E27**

## HALF SILVER GLASS

Watts 4W  
 Input Voltage AC : 175-265V  
 Flux 400lm  
 Beam Angle 180°  
 Socket E27

SKU: 1879  
 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x105 mm  
 Body Type A60  
 Dimmable NO



## LED ST64 Bulbs Filament


**6W E27**

## GOLDEN GLASS

Watts 6W  
 Input Voltage AC : 220-240V  
 Flux 540lm  
 Beam Angle 270°  
 Socket E27

SKU: 1306  
 2500K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø64x140 mm  
 Body Type ST64  
 Dimmable NO



## LED Bulbs Filament


**7W E27**

## HALF GOLDEN GLASS

Watts 7W  
 Input Voltage AC : 175-265V  
 Flux 800lm  
 Beam Angle 180°  
 Socket E27

SKU: 1896  
 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x105 mm  
 Body Type A60  
 Dimmable NO



## LED ST64 Bulbs Filament


**8W E27**

## GOLDEN GLASS

Watts 8W  
 Input Voltage AC : 220-240V  
 Flux 700lm  
 Beam Angle 270°  
 Socket E27

SKU: 1305  
 2500K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø64x140 mm  
 Body Type ST64  
 Dimmable NO



## LED Bulbs Filament


**7W E27**

## HALF SILVER GLASS

Watts 7W  
 Input Voltage AC : 175-265V  
 Flux 800lm  
 Beam Angle 180°  
 Socket E27

SKU: 1880  
 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x105 mm  
 Body Type A60  
 Dimmable NO



## LED ST64 Bulbs Filament


**8W E27**

## GOLDEN GLASS

Watts 8W  
 Input Voltage AC : 220-240V  
 Flux 700lm  
 Beam Angle 270°  
 Socket E27

SKU: 1322  
 2500K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø64x140 mm  
 Body Type ST64  
 Dimmable YES





**LED A60 Bulbs Filament**  
**4W E27**

Watts 4W  
 Input Voltage AC : 175-265V  
 Flux 470lm  
 Beam Angle 300°  
 Socket E27

SKU: 1857 6000K  
 SKU: 1858 4500K  
 SKU: 1859 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x100 mm  
 Body Type A60  
 Dimmable NO

470 Lumens  
 300°  
 E27



**LED A60 Bulbs Filament**  
**8W E27**

Watts 8W  
 Input Voltage AC : 220-240V  
 Flux 810lm  
 Beam Angle 300°  
 Socket E27

SKU: 1310 6000K  
 SKU: 1311 4500K  
 SKU: 1312 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x110 mm  
 Body Type A60  
 Dimmable NO

810 Lumens  
 300°  
 E27



**LED A60 Bulbs Filament**  
**4W E27**

Watts 4W  
 Input Voltage AC : 175-265V  
 Flux 400lm  
 Beam Angle 300°  
 Socket E27

SKU: 1899  
 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x106 mm  
 Body Type A60  
 Dimmable YES

400 Lumens  
 Dimmable  
 E27



**LED A60 Bulbs Filament**  
**8W E27**

Watts 8W  
 Input Voltage AC : 220-240V  
 Flux 810lm  
 Beam Angle 300°  
 Socket E27

SKU: 1323  
 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x110 mm  
 Body Type A60  
 Dimmable YES

810 Lumens  
 Dimmable  
 E27



**LED A60 Bulbs Filament**  
**5W E27**

Watts 5W  
 Input Voltage AC : 175-265V  
 Flux 600lm  
 Beam Angle 300°  
 Socket E27

SKU: 1854 6000K  
 SKU: 1855 4500K  
 SKU: 1856 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x106 mm  
 Body Type A60  
 Dimmable NO

600 Lumens  
 270°  
 E27



**LED A60 Bulbs Filament**  
**8W E27**  
**GOLDEN GLASS**

Watts 8W  
 Input Voltage AC : 220-240V  
 Flux 700lm  
 Beam Angle 300°  
 Socket E27

SKU: 1796  
 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x105 mm  
 Body Type A60  
 Dimmable NO

700 Lumens  
 300°  
 E27



**LED A60 Bulbs Filament**  
**6W E27**

Watts 6W  
 Input Voltage AC : 220-240V  
 Flux 630lm  
 Beam Angle 300°  
 Socket E27

SKU: 1308 4000K  
 SKU: 1309 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x105 mm  
 Body Type A60  
 Dimmable NO

630 Lumens  
 300°  
 E27



**LED A60 Bulbs Filament**  
**8W E27**  
**GOLDEN GLASS**

Watts 8W  
 Input Voltage AC : 220-240V  
 Flux 720lm  
 Beam Angle 300°  
 Socket E27

SKU: 1324  
 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x105 mm  
 Body Type A60  
 Dimmable YES


720 Lumens  
 Dimmable  
 E27




**LED A60 Bulbs Filament**  
**10W E27**


Watts	10W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	1350lm	Dimension	ø60x110 mm
Beam Angle	300°	Body Type	A60
Socket	E27	Dimmable	NO

SKU: 1313   SKU: 1314   SKU: 1315  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED G45 Bulbs Filament**  
**4W E27**


Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø45x78 mm
Beam Angle	300°	Body Type	G45
Socket	E27	Dimmable	NO

SKU: 1867   SKU: 1868   SKU: 1869  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED A65 Bulbs Filament**  
**12W E27**


Watts	12W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	1500lm	Dimension	ø65x126 mm
Beam Angle	300°	Body Type	A60
Socket	E27	Dimmable	NO

SKU: 1316   SKU: 1317   SKU: 1318  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED G45 Bulbs Filament**  
**4W E27**


Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø45x78 mm
Beam Angle	300°	Body Type	G45
Socket	E27	Dimmable	NO

SKU: 1325  
 ■ 2700K


**LED A65 Bulbs Filament**  
**14W E27**


Watts	14W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	2000lm	Dimension	ø65x126 mm
Beam Angle	300°	Body Type	A60
Socket	E27	Dimmable	NO

SKU: 1319   SKU: 1320   SKU: 1321  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED G45 Bulbs Filament**  
**4W E27**  
**GOLDEN GLASS**


Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	320lm	Dimension	ø45x78 mm
Beam Angle	300°	Body Type	G45
Socket	E27	Dimmable	YES

SKU: 1326  
 ■ 2700K


**LED G45 Bulbs Filament**  
**2W E27**


Watts	2W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	200lm	Dimension	ø45x78 mm
Beam Angle	300°	Body Type	G45
Socket	E27	Dimmable	NO

SKU: 1864   SKU: 1865   SKU: 1866  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED G125 Bulbs Filament**  
**4W E27**  
**GOLDEN GLASS**

Watts	4W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	400lm	Dimension	ø95x135 mm
Beam Angle	270°	Body Type	G95
Socket	E27	Dimmable	NO

SKU: 1794  
 ■ 2700K






**LED G125 Bulbs Filament  
4W E27**

Watts 4W  
 Input Voltage AC : 175-265V  
 Flux 400lm  
 Beam Angle 300°  
 Socket E27


SKU: 1863    SKU: 1862  
 ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø125x165 mm  
 Body Type G125  
 Dimmable NO

400  
 Lumens

300°

E27


**LED G45 Bulbs Filament  
4W E14**

Watts 4W  
 Input Voltage AC : 175-265V  
 Flux 400lm  
 Beam Angle 300°  
 Socket E14


SKU: 1417  
 ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø45x78 mm  
 Body Type G45  
 Dimmable YES

400  
 Lumens

Dimmable

E14


**LED G125 Bulbs Filament  
6.5W E27**

Watts 6.5W  
 Input Voltage AC : 175-265V  
 Flux 810lm  
 Beam Angle 300°  
 Socket E27


SKU: 1861    SKU: 1860  
 ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø125x165 mm  
 Body Type G125  
 Dimmable NO

810  
 Lumens

300°

E27


**LED G45 Bulbs Filament  
4W E14  
GOLDEN GLASS**

Watts 4W  
 Input Voltage AC : 175-265V  
 Flux 400lm  
 Beam Angle 300°  
 Socket E14


SKU: 1492  
 ■ 2500K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø45x78 mm  
 Body Type G45  
 Dimmable NO

400  
 Lumens

300°

E14


**LED G45 Bulbs Filament  
2W E14**

Watts 2W  
 Input Voltage AC : 175-265V  
 Flux 200lm  
 Beam Angle 300°  
 Socket E14


SKU: 1474    SKU: 1475    SKU: 1476  
 ■ 6000K    ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø45x78 mm  
 Body Type G45  
 Dimmable NO

200  
 Lumens

300°

E14


**LED G45 Bulbs Filament  
4W E14  
GOLDEN GLASS**

Watts 4W  
 Input Voltage AC : 175-265V  
 Flux 350lm  
 Beam Angle 300°  
 Socket E14


SKU: 1418  
 ■ 2500K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø45x78 mm  
 Body Type G45  
 Dimmable YES

350  
 Lumens

Dimmable

E14


**LED G45 Bulbs Filament  
4W E14**

Watts 4W  
 Input Voltage AC : 175-265V  
 Flux 400lm  
 Beam Angle 300°  
 Socket E14


SKU: 1477    SKU: 1478    SKU: 1479  
 ■ 6000K    ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø45x78 mm  
 Body Type G45  
 Dimmable NO

400  
 Lumens

300°

E14


**LED R50 Bulbs Filament  
5W E14**

Watts 5W  
 Input Voltage AC : 175-265V  
 Flux 600lm  
 Beam Angle 70°  
 Socket E14


SKU: 1872  
 ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø50x86 mm  
 Body Type R50  
 Dimmable NO

600  
 Lumens

70°


E14




**LED C35 Candle Filament  
4W E14**

Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø35x98 mm
Beam Angle	300°	Body Type	C35
Socket	E14	Dimmable	NO

SKU: 1470   SKU: 1471   SKU: 1472  
 6000K   4500K   2700K


**LED C35 Candle Filament  
4W E14**


Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø35x98 mm
Beam Angle	300°	Body Type	C35
Socket	E14	Dimmable	YES

SKU: 1469   SKU: 1473  
 4500K   2700K


**LED C35 Candle Filament  
4W E14  
GOLDEN GLASS**


Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø35x98 mm
Beam Angle	300°	Body Type	C35
Socket	E14	Dimmable	NO

SKU: 1490  
 2500K


**LED C35 Twist Candle Filament  
4W E14**


Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø35x98 mm
Beam Angle	300°	Body Type	C35 Twist
Socket	E14	Dimmable	NO

SKU: 1413  
 2700K


**LED C35 Tip Candle Filament  
4W E14**


Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø35x115 mm
Beam Angle	300°	Body Type	C35 Tip
Socket	E14	Dimmable	NO

SKU: 1480   SKU: 1481   SKU: 1482  
 6000K   4500K   2700K


**LED C35 Tip Candle Filament  
4W E14**

Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø35x115 mm
Beam Angle	300°	Body Type	C35 Tip
Socket	E14	Dimmable	YES

SKU: 1415  
 2700K


**LED C35 Tip Candle Filament  
4W E14  
GOLDEN GLASS**

Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø35x120 mm
Beam Angle	300°	Body Type	C35 Tip
Socket	E14	Dimmable	YES

SKU: 1416  
 2500K


**LED C35 Tip Candle Filament  
4W E14  
GOLDEN GLASS**

Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø35x120 mm
Beam Angle	300°	Body Type	C35 Tip
Socket	E14	Dimmable	NO


SKU: 1491  
 2500K




**LED C35 Candle Twist Bulbs Filament  
4W E14**

Watts	4W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	400lm	Dimension	ø35x115 mm
Beam Angle	300°	Body Type	C35T Twist
Socket	E14	Dimmable	NO

SKU: 1414  
■ 2700K


**LED C35 Candle Filament  
6W E14**


Watts	6W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	730lm	Dimension	ø35x98 mm
Beam Angle	300°	Body Type	C35
Socket	E14	Dimmable	NO

SKU: 1410 ■ 6000K  
 SKU: 1411 ■ 4500K  
 SKU: 1412 ■ 2700K


**LED Bulb A60 Motion Sensor  
7W E27**


Watts	7W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	560lm	Dimension	ø60x123 mm
Beam Angle	270°	Body Type	A60
Socket	E27	Dimmable	NO

SKU: 1710 ■ 6000K  
 SKU: 1711 ■ 4500K


**LED Bulb A60  
8.5W E27**

Watts	8.5W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	806lm	Dimension	ø60x108 mm
Beam Angle	270°	Body Type	A60
Socket	E27	Dimmable	NO

SKU: 1351 ■ 6000K  
 SKU: 1352 ■ 4500K  
 SKU: 1353 ■ 2700K


**NEW**

**LED BULB T80  
24W E27**

Watts	24W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	2700lm	Dimension	ø80x138 mm
Beam Angle	150°	Body Type	T80
Socket	E27	Dimmable	NO

SKU: 11891 ■ 6000K  
 SKU: 11892 ■ 4000K



SKU: 11899  
 Adaptor E27>E40  
**NOT INCLUDED**

**NEW**

**LED BULB T100  
30W E27**

Watts	30W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3200lm	Dimension	ø100x165 mm
Beam Angle	150°	Body Type	T100
Socket	E27	Dimmable	NO

SKU: 11893 ■ 6000K  
 SKU: 11894 ■ 4000K



SKU: 11899  
 Adaptor E27>E40  
**NOT INCLUDED**

**NEW**

**LED BULB T120  
40W E27**

Watts	40W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	4000lm	Dimension	ø120x191 mm
Beam Angle	150°	Body Type	T120
Socket	E27	Dimmable	NO

SKU: 11895 ■ 6000K  
 SKU: 11896 ■ 4000K



SKU: 11899  
 Adaptor E27>E40  
**NOT INCLUDED**

**NEW**

**LED BULB T140  
50W E27**

Watts	50W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	5000lm	Dimension	ø140x220 mm
Beam Angle	100°	Body Type	T140
Socket	E27	Dimmable	NO

SKU: 11897 ■ 6000K  
 SKU: 11898 ■ 4000K



SKU: 11899  
 Adaptor E27>E40  
**NOT INCLUDED**




LED Bulb A60

**8.5W E27**

Watts 8.5W  
 Input Voltage AC : 220-240V  
 Flux 806lm  
 Beam Angle 270°  
 Socket E27

SKU: 1341 6000K  
 SKU: 1342 4500K  
 SKU: 1343 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x108 mm  
 Body Type A60  
 Dimmable NO

108 mm  
ø60 mm

Dimmable




LED Bulb A60

**9W E27**

Watts 9W  
 Input Voltage AC : 220-240V  
 Flux 806lm  
 Beam Angle 270°  
 Socket E27

SKU: 1701 6000K  
 SKU: 1702 4500K  
 SKU: 1703 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x108 mm  
 Body Type A60  
 Dimmable YES

108 mm  
ø60 mm


LED Bulb A60

**10W E27**

Watts 10W  
 Input Voltage AC : 220-240V  
 Flux 806lm  
 Beam Angle 270°  
 Socket E27

SKU: 1849  
 6000K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x110 mm  
 Body Type A60  
 Dimmable YES

110 mm  
ø60 mm


LED Bulb A60

**10.5W E27**

Watts 10.5W  
 Input Voltage AC : 220-240V  
 Flux 1055lm  
 Beam Angle 270°  
 Socket E27

SKU: 1354 6000K  
 SKU: 1355 4500K  
 SKU: 1356 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x108 mm  
 Body Type A60  
 Dimmable NO

108 mm  
ø60 mm

Dimmable




LED Bulb A60

**11W E27**

Watts 11W  
 Input Voltage AC : 220-240V  
 Flux 1055lm  
 Beam Angle 270°  
 Socket E27

SKU: 1704 6000K  
 SKU: 1705 4500K  
 SKU: 1706 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x110mm  
 Body Type A60  
 Dimmable YES

110 mm  
ø60 mm


LED Bulb A60

**14W E27**

Watts 14W  
 Input Voltage AC : 220-240V  
 Flux 1380lm  
 Beam Angle 270°  
 Socket E27

SKU: 1357 6000K  
 SKU: 1358 4500K  
 SKU: 1359 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø60x108 mm  
 Body Type A60  
 Dimmable NO

108 mm  
ø60 mm


LED Bulb A65

**17W E27**

Watts 17W  
 Input Voltage AC : 220-240V  
 Flux 1710lm  
 Beam Angle 270°  
 Socket E27

SKU: 1360 6000K  
 SKU: 1361 4500K  
 SKU: 1362 2700K


CRI Ra>80  
 IP Rating IP20  
 Dimension ø65x134 mm  
 Body Type A65  
 Dimmable NO

134 mm  
ø65 mm


**LED Bulb A65**  
**19W E27**


Watts	19W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	1950lm	Dimension	ø65x138 mm
Beam Angle	270°	Body Type	A65
Socket	E27	Dimmable	NO

SKU: 1363   SKU: 1364   SKU: 1365  
 6000K   4500K   2700K


**LED Bulb G45**  
**3.5W E27**


Watts	3.5W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	300lm	Dimension	ø45x75 mm
Beam Angle	180°	Body Type	G45
Socket	E27	Dimmable	NO

SKU: 1344   SKU: 1345   SKU: 1346  
 6000K   4500K   2700K


**LED Bulb G45**  
**5.5W E27**


Watts	5.5W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	450lm	Dimension	ø45x75 mm
Beam Angle	180°	Body Type	G45
Socket	E27	Dimmable	NO

SKU: 1327   SKU: 1328   SKU: 1329  
 6000K   4500K   2700K


**LED Bulb G45**  
**8W E27**


Watts	8W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	710lm	Dimension	ø45x75 mm
Beam Angle	180°	Body Type	G45
Socket	E27	Dimmable	NO

SKU: 1336   SKU: 1337   SKU: 1338  
 6000K   4500K   2700K


**LED Bulb G95**  
**12W E27**


Watts	12W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1155lm	Dimension	ø95x138 mm
Beam Angle	270°	Body Type	A60
Socket	E27	Dimmable	NO

SKU: 1841   SKU: 1842   SKU: 1843  
 6000K   4500K   2700K


**LED Bulb G120**  
**15W E27**

Watts	15W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1500lm	Dimension	ø120x155 mm
Beam Angle	270°	Body Type	G120
Socket	E27	Dimmable	NO

SKU: 1845   SKU: 1846   SKU: 1847  
 6000K   4500K   2700K


**LED Bulb G120**  
**18W E27**

Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1820lm	Dimension	ø125x172 mm
Beam Angle	270°	Body Type	120
Socket	E27	Dimmable	NO

SKU: 1884   SKU: 1885   SKU: 1886  
 6000K   4500K   2700K




**LED Bulb G63**  
**6W E27**


Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	480lm	Dimension	ø63x100 mm
Beam Angle	200°	Body Type	A60
Socket	E27	Dimmable	NO

SKU: 1876   SKU: 1877   SKU: 1878  
 ■ 6000K   ■ 4500K   ■ 2700K

480  
Lumens

200°

E27


**LED Spot PAR30**  
**30W E27**


Watts	30W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	2400lm	Dimension	ø95x130 mm
Beam Angle	30°	Body Type	PAR30
Socket	E27	Dimmable	NO

SKU: 1528   SKU: 1529   SKU: 1530  
 ■ 6000K   ■ 4500K   ■ 2700K

2400  
Lumens

30°

E27


**PORTABLE LED SOLAR BULB**  
**Solar Panel Power: 6V 2.3W**

Voltage	6V	CRI	Ra>80
Flux	650lm	IP Rating	IP20
Beam Angle	360°	Body Color	White
Battery	3.2V 10Ah	Dimension	ø110x195 mm

SKU: 229  
 ■ 6000K

650  
Lumens

IP20



Battery



Solar Power


**LED Bulb P45**  
**3.5W E14**


Watts	3.5W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	300lm	Dimension	ø45x78 mm
Beam Angle	240°	Body Type	P45
Socket	E14	Dimmable	NO

SKU: 1407   SKU: 1408   SKU: 1409  
 ■ 6000K   ■ 4500K   ■ 2700K

300  
Lumens

240°

E14


**LED Candle C37**  
**3.7W E14**


Watts	3.7W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	320lm	Dimension	ø37x100 mm
Beam Angle	180°	Body Type	C37
Socket	E14	Dimmable	NO

SKU: 1422   SKU: 1423   SKU: 1424  
 ■ 6000K   ■ 4500K   ■ 2700K

320  
Lumens

180°

E14


**LED Candle C37**  
**5.5W E14**


Watts	5.5W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	450lm	Dimension	ø37x100 mm
Beam Angle	180°	Body Type	C37
Socket	E14	Dimmable	NO

SKU: 1425   SKU: 1426   SKU: 1427  
 ■ 6000K   ■ 4500K   ■ 2700K

450  
Lumens

180°

E14


**LED Candle C37**  
**6W E14**


Watts	6W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	480lm	Dimension	ø37x100 mm
Beam Angle	180°	Body Type	C37
Socket	E14	Dimmable	YES

SKU: 1464   SKU: 1465   SKU: 1463  
 ■ 6000K   ■ 4500K   ■ 2700K

480  
Lumens

180°

E14




Dimmable


**LED Candle C37**  
**8W E14**


Watts	8W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	710lm	Dimension	ø37x112 mm
Beam Angle	180°	Body Type	C37
Socket	E14	Dimmable	NO

SKU: 1428    SKU: 1429    SKU: 1430  
 6000K    4500K    2700K


**LED Candle C37**  
**5.5W E14**

Watts	5.5W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	450lm	Dimension	ø37x125 mm
Beam Angle	180°	Body Type	C37
Socket	E14	Dimmable	NO


SKU: 1435    SKU: 1436    SKU: 1437  
 6000K    4500K    2700K


**NEW**

**LED Spotlight E14**  
**7W SMD**



Watts	7W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	820lm	Dimension	ø19x71 mm
Beam Angle	360°	Material	Alu+PC
Socket	E14	Dimmable	NO

SKU: 1499  
 4500K


**LED Bulb P45**  
**5.5W E14**


Watts	5.5W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	450lm	Dimension	ø45x78 mm
Beam Angle	240°	Body Type	P45
Socket	E14	Dimmable	NO

SKU: 1401    SKU: 1402    SKU: 1403  
 6000K    4500K    2700K


**LED Bulb P45**  
**8W E14**


Watts	8W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	710lm	Dimension	ø45x78 mm
Beam Angle	240°	Body Type	P45
Socket	E14	Dimmable	NO

SKU: 1404    SKU: 1405    SKU: 1406  
 6000K    4500K    2700K


**LED Bulb P45**  
**8.5W E14**


Watts	8.5W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	800lm	Dimension	ø45x78 mm
Beam Angle	240°	Body Type	P45
Socket	E14	Dimmable	NO

SKU: 1493    SKU: 1494  
 6000K    4500K


**LED Bulb R50**  
**6W E14**

Watts	6W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	450lm	Dimension	ø50x85 mm
Beam Angle	200°	Body Type	R50
Socket	E14	Dimmable	NO

SKU: 1438    SKU: 1439    SKU: 1440  
 6000K    4500K    2700K





**LED Bulb A60 High Lumen  
9W B22**

Watts 9W  
 Input Voltage AC : 220-240V  
 Flux 820lm  
 Beam Angle 270°  
 Socket B22

SKU: 1918 6000K  
 SKU: 1919 4500K  
 SKU: 1920 2700K


CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 60x110 mm  
 Body Type A60  
 Dimmable NO


**LED Bulb A60  
10W B22**

Watts 10W  
 Input Voltage AC : 220-240V  
 Flux 800lm  
 Beam Angle 270°  
 Socket B22

SKU: 1910  
 2700K


CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 60x110 mm  
 Body Type A60  
 Dimmable YES


**LED Bulb A60 High Lumen  
11W B22**

Watts 11W  
 Input Voltage AC : 220-240V  
 Flux 1055lm  
 Beam Angle 270°  
 Socket B22

SKU: 1921 6000K  
 SKU: 1922 4500K  
 SKU: 1923 2700K


CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 60x110 mm  
 Body Type A60  
 Dimmable NO


**LED Bulb A65  
12W B22**

Watts 12W  
 Input Voltage AC : 220-240V  
 Flux 960lm  
 Beam Angle 270°  
 Socket B22

SKU: 1914  
 2700K


CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 65x110 mm  
 Body Type A65  
 Dimmable YES


**LED Bulb A65  
15W B22**

Watts 15W  
 Input Voltage AC : 220-240V  
 Flux 1200lm  
 Beam Angle 270°  
 Socket B22

SKU: 1915 6000K  
 SKU: 1916 4500K  
 SKU: 1917 2700K


CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 65x110 mm  
 Body Type A65  
 Dimmable NO


**LED Candle C37  
6W B22**

Watts 6W  
 Input Voltage AC : 220-240V  
 Flux 480lm  
 Beam Angle 180°  
 Socket B22

SKU: 1950 6000K  
 SKU: 1951 4500K  
 SKU: 1952 2700K


CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 37x90 mm  
 Body Type C37  
 Dimmable NO


**LED Candle C37  
6W B22**

Watts 6W  
 Input Voltage AC : 220-240V  
 Flux 480lm  
 Beam Angle 180°  
 Socket B22

SKU: 1953  
 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 37x90 mm  
 Body Type C37  
 Dimmable YES





**NEW**




**LED Spotlight G4  
2W SMD**

Watts 2W  
Input Voltage AC;DC 12V  
Flux 180lm  
Beam Angle 300°  
Socket G4

CRI Ra>80  
IP Rating IP20  
Dimension ø12x29 mm  
Material Plastic  
Dimmable NO

**180**  
Lumens 300° G4



SKU: 1601 6000K    SKU: 1602 4500K    SKU: 1603 2800K


5 PCS  
BLISTER

**220**  
Lumens 360° G9

**LED Spotlight G9  
3W SMD**

Watts 3W  
Input Voltage AC:170-265V  
Flux 220lm  
Beam Angle 360°  
Socket G9

CRI Ra>80  
IP Rating IP20  
Dimension ø16x48 mm  
Material Plastic  
Dimmable NO



SKU: 1638 6000K    SKU: 1639 4500K    SKU: 1640 2700K


5 PCS  
BLISTER

**LED Spotlight G4  
2W SMD**

Watts 2W  
Input Voltage AC;DC 12V  
Flux 170lm  
Beam Angle 360°  
Socket G4

CRI Ra>80  
IP Rating IP20  
Dimension ø10x30 mm  
Material Plastic  
Dimmable NO

**170**  
Lumens 320° G4



SKU: 1615 6000K    SKU: 1616 4500K    SKU: 1617 2700K


5 PCS  
BLISTER

**LED Spotlight G9  
3.5W SMD**

Watts 3.5W  
Input Voltage AC:220-240V  
Flux 400lm  
Beam Angle 360°  
Socket G9

CRI Ra>80  
IP Rating IP20  
Dimension ø16x50 mm  
Material Ceramic  
Dimmable NO

**400**  
Lumens 320° G9



SKU: 1651 6000K    SKU: 1652 4500K    SKU: 1653 2700K


5 PCS  
BLISTER

**LED Spotlight G4/MR11  
3W SMD**

Watts 3W  
Input Voltage AC;DC 12V  
Flux 210lm  
Beam Angle 38°  
Socket G4

CRI Ra>80  
IP Rating IP20  
Dimension ø35x45 mm  
Material Plastic  
Dimmable NO

**210**  
Lumens 38° G4



SKU: 1066 6000K    SKU: 1067 4500K    SKU: 1068 2700K




**LED Spotlight G9  
4W SMD**

Watts 4W  
Input Voltage AC:220-240V  
Flux 400lm  
Beam Angle 360°  
Socket G9

CRI Ra>80  
IP Rating IP20  
Dimension ø16x50 mm  
Material Ceramic  
Dimmable YES

**400**  
Lumens Dimmable G9



SKU: 1654 6000K    SKU: 1655 4500K    SKU: 1656 2700K

5 PCS  
BLISTER




LED Spotlight G9  
**6W SMD**

Watts 6W  
Input Voltage AC:170-265V  
Flux 550lm  
Beam Angle 360°  
Socket G9

CRI Ra>80  
IP Rating IP20  
Dimension ø18x64 mm  
Material Plastic  
Dimmable YES

SKU: 1644 6000K  
SKU: 1645 4500K  
SKU: 1646 2700K




LED Spotlight G9  
**7W SMD**

Watts 7W  
Input Voltage AC:220-240V  
Flux 820lm  
Beam Angle 360°  
Socket G9

CRI Ra>80  
IP Rating IP20  
Dimension ø19x68 mm  
Material Plastic  
Dimmable NO

SKU: 1647  
2800K




LED Spotlight G9  
**7W SMD**

Watts 7W  
Input Voltage AC:220-240V  
Flux 950lm  
Beam Angle 360°  
Socket G9

CRI Ra>80  
IP Rating IP20  
Dimension ø19x68 mm  
Material Plastic  
Dimmable NO

SKU: 1648  
2800K





LED Spotlight G5.3  
**15W AR11**

Watts 15W  
Input Voltage AC ; DC 12V  
Flux 1050lm  
Beam Angle 30°  
Socket G5.3

CRI Ra>80  
IP Rating IP20  
Dimension ø111x58 mm  
Material Plastic  
Dimmable NO

SKU: 1517 4500K  
SKU: 1516 2700K




LED Spotlight G5.3  
**15W AR11**

Watts 15W  
Input Voltage AC ; DC 12V  
Flux 1050lm  
Beam Angle 120°  
Socket G5.3

CRI Ra>80  
IP Rating IP20  
Dimension ø111x58 mm  
Material Plastic  
Dimmable NO

SKU: 1519 4500K  
SKU: 1518 2700K




LED Spotlight GX53  
**7W Recessed**

Watts 7W  
Input Voltage AC:220-240V  
Flux 560lm  
Beam Angle 180°  
Socket GX53

CRI Ra>80  
IP Rating IP20  
Dimension ø74x25 mm  
Material Plastic  
Dimmable NO

SKU: 1541 6000K  
SKU: 1542 4500K  
SKU: 1543 2700K




**LED Spotlight GU10  
9W AR111**

Watts 9W  
 Input Voltage AC: 170-265V  
 Flux 820lm  
 Beam Angle 120°  
 Socket GU10


SKU: 1531    SKU: 1532  
 ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 111x58 mm  
 Material Plastic  
 Dimmable NO

820  
Lumens

120°

GU10


**LED Spotlight GU10  
15W AR111**

Watts 15W  
 Input Voltage AC: 170-265V  
 Flux 1200lm  
 Beam Angle 30°  
 Socket GU10


SKU: 1533    SKU: 1534  
 ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 111x58 mm  
 Material Aluminium  
 Dimmable NO

1200  
Lumens

30°

GU10


**LED Spotlight GU10  
15W AR111**

Watts 15W  
 Input Voltage AC: 170-265V  
 Flux 1100lm  
 Beam Angle 30°  
 Socket GU10


SKU: 1535    SKU: 1536  
 ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 111x58 mm  
 Material Aluminium  
 Dimmable YES

1100  
Lumens

Dimmable

GU10


**LED Spotlight GU5.3/MR16  
5W SMD**

Watts 5W  
 Input Voltage DC : 12V  
 Flux 400lm  
 Beam Angle 110°  
 Socket GU5.3


SKU: 1191    SKU: 1192    SKU: 1193  
 ■ 6000K    ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 50x47 mm  
 Material Plastic  
 Dimmable NO

400  
Lumens

110°

GU5.3


**LED Spotlight GU5.3/MR16  
7W SMD**

Watts 7W  
 Input Voltage DC : 12V  
 Flux 600lm  
 Beam Angle 110°  
 Socket GU5.3


SKU: 1194    SKU: 1195    SKU: 1196  
 ■ 6000K    ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 50x47 mm  
 Material Plastic  
 Dimmable NO

600  
Lumens

110°

GU5.3


**LED Spotlight GU5.3/MR16  
4W COB**

Watts 4W  
 Input Voltage AC;DC 12V  
 Flux 320lm  
 Beam Angle 50°  
 Socket GU5.3


SKU: 1167    SKU: 1164  
 ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 50x55 mm  
 Material Plastic  
 Dimmable NO

320  
Lumens

50°

GU5.3


**LED Spotlight GU5.3/MR16  
6W COB**

Watts 6W  
 Input Voltage AC;DC 12V  
 Flux 400lm  
 Beam Angle 50°  
 Socket GU5.3


SKU: 1168    SKU: 1169    SKU: 1170  
 ■ 6000K    ■ 4500K    ■ 2700K

CRI Ra>80  
 IP Rating IP20  
 Dimension  $\phi$ 50x55 mm  
 Material Plastic  
 Dimmable NO

400  
Lumens

50°

GU5.3




**NEW**
**LED Spotlight GU10 VINTAGE**  
**6W Glass - PREMIUM DIMMING**
**700**  
 Lumens

0-100% Dimming

GU10


Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	700lm	Dimension	ø50x55 mm
Beam Angle	120°	Body Color	Glass
Socket	GU10	Dimmable	YES

 SKU: 1925   SKU:1926   SKU: 1927  
 ■ 6000K   ■ 4500K   ■ 2800K

**LED Spotlight GU10**  
**4W COB**
**320**  
 Lumens

50°

GU10


Watts	4W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	320lm	Dimension	ø50x60 mm
Beam Angle	50°	Body Color	Gray
Socket	GU10	Dimmable	NO

 SKU: 1263   SKU:1264   SKU: 1265  
 ■ 6000K   ■ 4500K   ■ 2700K

**LED Spotlight GU10**  
**4W COB**
**320**  
 Lumens

50°

GU10


Watts	4W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	320lm	Dimension	ø50x55 mm
Beam Angle	50°	Body Color	White
Socket	GU10	Dimmable	NO

 SKU: 1957   SKU:1958   SKU: 1959  
 ■ 6000K   ■ 4500K   ■ 2700K

**LED Spotlight GU10**  
**4W COB**
**320**  
 Lumens

Dimmable

GU10


Watts	4W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	320lm	Dimension	ø50x60 mm
Beam Angle	50°	Body Color	Gray
Socket	GU10	Dimmable	YES

 SKU: 1266   SKU:1267  
 ■ 6000K   ■ 4500K

**LED Spotlight GU10**  
**6W COB**
**480**  
 Lumens

50°

GU10


Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	480lm	Dimension	ø50x55 mm
Beam Angle	50°	Body Color	White
Socket	GU10	Dimmable	NO

 SKU: 1960   SKU:1961   SKU: 1962  
 ■ 6000K   ■ 4500K   ■ 2700K

**LED Spotlight GU10**  
**6W COB**
**480**  
 Lumens

50°

GU10


Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	480lm	Dimension	ø50x60 mm
Beam Angle	50°	Body Color	Gray
Socket	GU10	Dimmable	NO

 SKU: 1269   SKU:1270   SKU: 1271  
 ■ 6000K   ■ 4500K   ■ 2700K

**LED Spotlight GU10**  
**6W COB**
**480**  
 Lumens

Dimmable

GU10


Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	480lm	Dimension	ø50x55 mm
Beam Angle	50°	Body Color	White
Socket	GU10	Dimmable	YES

 SKU: 1963   SKU:1964   SKU: 1965  
 ■ 6000K   ■ 4500K   ■ 2700K

**LED Spotlight GU10**  
**6W COB**
**480**  
 Lumens

Dimmable

GU10

Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	480lm	Dimension	ø50x60 mm
Beam Angle	50°	Body Color	Gray
Socket	GU10	Dimmable	YES

 SKU: 1272   SKU:1273   SKU: 1274  
 ■ 6000K   ■ 4500K   ■ 2700K





LED Spotlight GU10  
**4.5W SMD**

Watts 4.5W  
Input Voltage AC : 220-240V  
Flux 320lm  
Beam Angle 110°  
Socket GU10

CRI Ra>80  
IP Rating IP20  
Dimension ø50x57 mm  
Material Plastic  
Dimmable NO

SKU: 1901    SKU:1902    SKU: 1903  
■ 6000K    ■ 4500K    ■ 2700K




LED Spotlight GU10  
**7W SMD**

Watts 7W  
Input Voltage AC : 175-265V  
Flux 560lm  
Beam Angle 38°  
Socket GU10

CRI Ra>80  
IP Rating IP20  
Dimension ø50x57 mm  
Material Plastic  
Dimmable YES

SKU:1943  
■ 4500K




LED Spotlight GU10  
**5W SMD**

Watts 5W  
Input Voltage AC : 175-265V  
Flux 400lm  
Beam Angle 38°  
Socket GU10

CRI Ra>80  
IP Rating IP20  
Dimension ø50x57 mm  
Material Plastic  
Dimmable NO

SKU: 1935    SKU:1936    SKU: 1937  
■ 6000K    ■ 4500K    ■ 2700K




LED Spotlight GU10  
**7W SMD**

Watts 7W  
Input Voltage AC : 175-265V  
Flux 500lm  
Beam Angle 110°  
Socket GU10

CRI Ra>80  
IP Rating IP20  
Dimension ø50x57 mm  
Material Plastic  
Dimmable YES

SKU: 1945    SKU:1946    SKU: 1947  
■ 6000K    ■ 4500K    ■ 2700K




LED Spotlight GU10  
**6.5W SMD**

Watts 6.5W  
Input Voltage AC : 220-240V  
Flux 550lm  
Beam Angle 110°  
Socket GU10

CRI Ra>80  
IP Rating IP20  
Dimension ø50x57 mm  
Material Plastic  
Dimmable NO

SKU: 1904    SKU:1905    SKU: 1906  
■ 6000K    ■ 4500K    ■ 2700K




LED Spotlight GU10  
**9.5W SMD**

Watts 9.5W  
Input Voltage AC : 220-240V  
Flux 880lm  
Beam Angle 110°  
Socket GU10

CRI Ra>80  
IP Rating IP20  
Dimension ø50x57 mm  
Material Plastic  
Dimmable NO

SKU: 1907    SKU:1908    SKU: 1909  
■ 6000K    ■ 4500K    ■ 2700K




LED Spotlight GU10  
**7W SMD**

Watts 7W  
Input Voltage AC : 175-265V  
Flux 560lm  
Beam Angle 38°  
Socket GU10

CRI Ra>80  
IP Rating IP20  
Dimension ø50x57 mm  
Material Plastic  
Dimmable NO

SKU: 1938    SKU:1939    SKU: 1940  
■ 6000K    ■ 4500K    ■ 2700K





**LED Bulb G95  
12W E27**

**1055**  
Lumens


270°

E27

Watts 12W  
Input Voltage AC : 175-265V  
Flux 1055lm  
Beam Angle 270°  
Socket E27

CRI Ra>80  
IP Rating IP20  
Dimension  $\phi 95 \times 127$  mm  
Body Type G95  
Dimmable NO

SKU: 1742    SKU:1743  
 6000K    4500K



**5**  
Years  
Warranty



**LED Bulb G120  
15W E27**

**1320**  
Lumens


270°

E27

Watts 15W  
Input Voltage AC : 175-265V  
Flux 1320lm  
Beam Angle 270°  
Socket E27

CRI Ra>80  
IP Rating IP20  
Dimension  $\phi 120 \times 155$  mm  
Body Type G120  
Dimmable NO

SKU: 1745    SKU:1746    SKU: 1747  
 6000K    4500K    2700K



**5**  
Years  
Warranty



**LED Bulb A60  
10W E27**

**950**  
Lumens


**5**  
Years  
Warranty

E27

Watts 10W  
Input Voltage AC : 175-265V  
Flux 950lm  
Beam Angle 270°  
Socket E27

CRI Ra>80  
IP Rating IP20  
Dimension  $\phi 60 \times 109$  mm  
Body Type A60  
Dimmable NO

SKU: 1718    SKU:1719    SKU: 1720  
 6000K    4500K    2700K



**LED Bulb A60  
12W E27**

**1155**  
Lumens


**5**  
Years  
Warranty

E27

Watts 12W  
Input Voltage AC : 175-265V  
Flux 1155lm  
Beam Angle 270°  
Socket E27

CRI Ra>80  
IP Rating IP20  
Dimension  $\phi 60 \times 112$  mm  
Body Type A60  
Dimmable NO

SKU: 1721    SKU:1722    SKU: 1723  
 6000K    4500K    2700K



**LED Bulb A60  
15W E27**

**1500**  
Lumens


**5**  
Years  
Warranty

E27

Watts 15W  
Input Voltage AC : 175-265V  
Flux 1500lm  
Beam Angle 270°  
Socket E27

CRI Ra>80  
IP Rating IP20  
Dimension  $\phi 60 \times 127$  mm  
Body Type A60  
Dimmable NO

SKU: 1724    SKU:1725    SKU: 1726  
 6000K    4500K    2700K



**LED Bulb A70  
18W E27**

**1880**  
Lumens


**5**  
Years  
Warranty

E27

Watts 18W  
Input Voltage AC : 175-265V  
Flux 1880lm  
Beam Angle 270°  
Socket E27

CRI Ra>80  
IP Rating IP20  
Dimension  $\phi 70 \times 145$  mm  
Body Type A70  
Dimmable NO

SKU: 1748    SKU:1749    SKU: 1750  
 6000K    4500K    2700K






5 Years  
Warranty

LED Spotlight GU5.3/MR16  
**5W SMD**

Watts 5W  
Input Voltage DC : 12V  
Flux 320lm  
Beam Angle 110°  
Socket GU5.3

SKU: 1761 6000K  
SKU: 1762 4500K  
SKU: 1763 2700K

CRI Ra>80  
IP Rating IP20  
Dimension ø50x47 mm  
Material Plastic  
Dimmable NO




5 Years  
Warranty

LED Spotlight GU5.3/MR16  
**7W SMD**

Watts 7W  
Input Voltage DC : 12V  
Flux 500lm  
Beam Angle 110°  
Socket GU5.3

SKU: 1764 6000K  
SKU: 1765 4500K  
SKU: 1766 2700K

CRI Ra>80  
IP Rating IP20  
Dimension ø50x47 mm  
Material Plastic  
Dimmable NO




5 Years  
Warranty

LED Spotlight GU10  
**5W SMD**

Watts 5W  
Input Voltage AC : 175-265V  
Flux 320lm  
Beam Angle 110°  
Socket GU10

SKU: 1767 6000K  
SKU: 1768 4500K  
SKU: 1769 2700K

CRI Ra>80  
IP Rating IP20  
Dimension ø50x57 mm  
Material Plastic  
Dimmable NO




5 Years  
Warranty

LED Spotlight GU10  
**7W SMD**

Watts 7W  
Input Voltage AC : 175-265V  
Flux 600lm  
Beam Angle 110°  
Socket GU10

SKU: 1772 6000K  
SKU: 1770 4500K  
SKU: 1773 2700K


CRI Ra>80  
IP Rating IP20  
Dimension ø50x57 mm  
Material Plastic  
Dimmable NO




SKU: 5081 WHITE BODY  
Dimension 180x180x42 mm



SKU: 5083 WHITE BODY  
Dimension 330x180x42 mm



SKU: 5085 WHITE BODY  
Dimension 480x180x42 mm



Accessories  
**AR111 Fitting Adjustable**



2 PCS  
BOX




SKU: 5082 SILVER BODY  
Dimension 180x180x42 mm



SKU: 5084 SILVER BODY  
Dimension 330x180x42 mm



SKU: 5086 SILVER BODY  
Dimension 480x180x42 mm



Accessories  
**AR111 Fitting Adjustable**



2 PCS  
BOX



SKU: 5070 WHITE BODY

Dimension ø82x30 mm

SKU: 5071 INOX BODY

Dimension ø82x30 mm

SKU: 5072 CHROME BODY

Dimension ø82x30 mm

Accessories

**GU10,MR16 Fitting**



GU10



2 PCS  
BOX



ø72mm



SKU: 5170 WHITE BODY Aluminium

Dimension ø83x29 mm

SKU: 5171 INOX BODY Aluminium

Dimension ø83x29 mm

SKU: 5172 CHROME BODY Aluminium

Dimension ø83x29 mm

SKU: 5097 WHITE BODY

Dimension ø83x29 mm

SKU: 5098 INOX BODY

Dimension ø83x29 mm

SKU: 5099 CHROME BODY

Dimension ø83x29 mm

Accessories

**GU10,MR16 Fitting Adjustable**



GU10



2 PCS  
BOX



45°



ø72mm



SKU: 5073 WHITE BODY

Dimension 83x83x30 mm

SKU: 5074 INOX BODY

Dimension 83x83x30 mm

SKU: 5075 CHROME BODY

Dimension 83x83x30 mm

Accessories

**GU10,MR16 Fitting**



GU10



2 PCS  
BOX



ø72mm



SKU: 5076 WHITE BODY

Dimension ø83x29 mm

SKU: 5077 INOX BODY

Dimension ø83x29 mm

SKU: 5078 CHROME BODY

Dimension ø83x29 mm

Accessories

**GU10,MR16 Fitting Adjustable**



GU10



2 PCS  
BOX



45°



ø72mm




**Spotlight Fixture - Waterproof  
GU10 Fitting**


Product code	OT1-A2	IP Rating	IP65
Socket	GU10	Dimension	Φ80x54 ; 83x83x54 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Satin Nickel
Material	Aluminium	Max Power	35W

**SKU: 2009** White Body - Round

**SKU: 2011** White Body - Square

**Spotlight Fixture - Aluminium  
GU10 Fitting**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ79x32 mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Aluminium+PC	Max Power	35W

**SKU: 2048** Black Reflector

**SKU: 2047** White Reflector

**SKU: 2049** Rose Gold Reflector

**Spotlight Fixture - Waterproof  
GU10 Fitting**


Product code	OT1-A2	IP Rating	IP65
Socket	GU10	Dimension	Φ80x54 ; 83x83x54 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Satin Nickel
Material	Aluminium	Max Power	35W

**SKU: 2010** Satin Nickel - Round

**SKU: 2012** Satin Nickel - Square

**Spotlight Fixture - Plastic  
GU10 Fitting**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	102x102x42 mm
Input Voltage	AC : 220-240V	Body Colors	White,Black,White-Black
Material	Plastic	Max Power	35W

**SKU: 2050** White Body

**SKU: 2051** Black Body

**SKU: 2052** White-Black Body


**Spotlight Fixture - Aluminium  
2xGU10 Fitting Adjustable**


Product code	OT1-A2	IP Rating	IP20
Socket	2xGU10	Dimension	80x160x85
Input Voltage	AC : 220-240V	Body Colors	White-Black
Material	Aluminium	Max Power	35W

SKU: 2080 White- 2xGU10

SKU: 2081 Black- 2XGu10


**Spotlight Fixture - Aluminium  
GU10 Fitting Adjustable**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	ø100x38 mm ;100x100x38mm
Input Voltage	AC : 220-240V	Body Colors	White-Black
Material	Aluminium	Max Power	35W

SKU: 2013 White/Black- Round

SKU: 2014 White/Black- Square


**Spotlight Fixture - Aluminium  
GU10 Fitting**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ120x80mm;120x120x80mm
Input Voltage	AC : 220-240V	Body Colors	Black
Material	Aluminium	Max Power	35W

SKU: 2082 Black-Round

SKU: 2083 Black-Square


**Spotlight Fixture - Aluminium  
GU10 Fitting Adjustable**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	185x100x38mm , 270x100x38 mm
Input Voltage	AC : 220-240V	Body Colors	White-Black
Material	Aluminium	Max Power	35W

SKU: 2015 2xGU10 Holder

SKU: 2016 3xGU10 Holder


**Spotlight Fixture - Round  
GU10 Fitting**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ80x42 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Aluminium+PC	Max Power	35W

SKU: 2031 White  
SKU: 2032 Black


**Spotlight Fixture - Round  
GU10 Fitting**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ80x42 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Aluminium+PC	Max Power	35W

SKU: 2035 Round  
SKU: 2036 Black


**Spotlight Fixture - Round  
GU10 Fitting**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ80x42 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Aluminium+PC	Max Power	35W

SKU: 2033 White  
SKU: 2034 Black


**Spotlight Fixture - Round  
GU10 Fitting**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ80x42 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Aluminium+PC	Max Power	35W

SKU: 2037 White  
SKU: 2038 Black



Spotlight Fixture  
**GU10 Fitting**



Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	75x75x140 mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Aluminium	Max Power	35W

- SKU: 2039 Black Reflector
- SKU: 2040 White Reflector
- SKU: 2041 Rose Gold Reflector



Spotlight Fixture -Plastic  
**GU10 Fitting Adjustable**



Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	Φ80x125 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Plastic	Max Power	10W

- SKU: 2001 White Body
- SKU: 2002 Black Body
- SKU: 2005 White Body
- SKU: 2006 Black Body



Spotlight Fixture  
**GU10 Fitting**



Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	Φ80x140 mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Aluminium	Max Power	35W

- SKU: 2042 Black Reflector
- SKU: 2043 White Reflector
- SKU: 2044 Rose Gold Reflector



Spotlight Fixture -Plastic  
**GU10 Fitting Adjustable**



Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	85x85x130 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Plastic	Max Power	10W

- SKU: 2003 White Body
- SKU: 2004 Black Body
- SKU: 2007 White Body
- SKU: 2008 Black Body



Spotlight Fixture - Aluminium  
**GU10 Fitting Adjustable**



Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ80x42 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Aluminium+PC	Max Power	35W

SKU: 2027 White Body  
 SKU: 2028 Black Body



Tracklight Fixture -Aluminium  
**GU10 Fitting Adjustable  
 For 3-Phase Track**



Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ55x82 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Aluminium	Max Power	35W

SKU: 2017 White Body  
 SKU: 2018 Black Body



Spotlight Fixture - Aluminium  
**GU10 Fitting**



Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ60x100 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Aluminium+PC	Max Power	35W

SKU: 2029 White Body  
 SKU: 2030 Black Body



Tracklight Fixture -Plastic  
**GU10 Fitting Adjustable  
 For Single-Phase Track**



Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ59x94x114 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Plastic	Max Power	10W

SKU: 2019 White Body  
 SKU: 2020 Black Body


**Spotlight Fixture - Plastic  
GU10 Fitting**


90°



GU10 Holder



IP20

Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ120x145 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Plastic	Max Power	10W

SKU: 2021 White  
SKU: 2022 Black

**Spotlight Fixture - Plastic  
GU10 Fitting**


90°



GU10 Holder



IP20

Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ120x145 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Plastic	Max Power	10W Each

SKU: 2025 White  
SKU: 2026 Black



75x75mm



φ85mm

**Spotlight Fixture - Plastic  
GU10 Fitting**


90°



GU10 Holder



IP20

Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ120x145 mm
Input Voltage	AC : 220-240V	Body Colors	White ; Black
Material	Plastic	Max Power	10W Each

SKU: 2023 Round  
SKU: 2024 Square

**Spotlight Fixture - Recessed  
GU10 Fitting**


GU10 Holder



IP20

Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	75x75x55mm ; φ85x50mm
Input Voltage	AC : 220-240V	Body Colors	White - Black Reflektor
Material	Aluminium+PC	Max Power	35W

SKU: 2045 Square  
SKU: 2046 Round



## Ceiling Fixture Trimless Recessed

**GU10 Fitting**  
**Gypsum + ALU**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ100x27mm ; 100x100x27mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Gypsum+Alu	Max Power	35W

SKU: 2060 Round  
 SKU: 2061 Square

## Ceiling Fixture Trimless Recessed

**GU10 Fitting**  
**Gypsum + ALU**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	120x120x60mm ; 215x118x58mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Gypsum+Alu	Max Power	35W

SKU: 2064 Square  
 SKU: 2065 Rectangle



## Ceiling Fixture Trimless Recessed

**GU10 Fitting**  
**Gypsum + ALU**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ130x50mm ; 120x120x60mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Gypsum+Alu	Max Power	35W

SKU: 2062 Round  
 SKU: 2063 Square

## Ceiling Fixture Trimless Recessed

**GU10 Fitting**  
**Gypsum + ALU**


Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	120x120x60mm ; 215x118x58mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Gypsum+Alu	Max Power	35W

SKU: 2066 Round  
 SKU: 2067 Square



Ceiling Fixture Trimless Recessed

**GU10 Fitting**  
**Gypsum + ALU**

Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ120x65mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Gypsum+Alu	Max Power	35W



SKU: 2068 Round-Frosted  
 SKU: 2069 Round



Ceiling Fixture Surface Mounted

**GU10 Fitting**  
**Gypsum + ALU**

Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	70x70x70mm ; 70x70x170mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Gypsum+Alu	Max Power	35W



SKU: 2072 Square H70  
 SKU: 2073 Square H170



Ceiling Fixture Surface Mounted

**GU10 Fitting**  
**Gypsum + ALU**

Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ70x70 mm ; φ70x170 mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Gypsum+Alu	Max Power	35W



SKU: 2070 Round H70mm  
 SKU: 2071 Round H170mm



Ceiling Fixture Surface Mounted

**GU10 Fitting**  
**Gypsum + ALU**

Product code	OT1-A2	IP Rating	IP20
Socket	GU10	Dimension	φ110x140mm ; 110x110x140mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Gypsum+Alu	Max Power	35W



SKU: 2074 Round  
 SKU: 2075 Square






**Spotlight Fixture - Single Head**  
**GU10 Fitting**


90°



GU10 Holder



IP20

Product code	OT1-A6	IP Rating	IP20
Socket	GU10	Dimension	60x108 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium	Max Power	35W

SKU: 9072 Black  
 SKU: 9076 White


**Spotlight Fixture - Three Heads**  
**GU10 Fitting**


90°



GU10 Holder



IP20

Product code	OT1-A6	IP Rating	IP20
Socket	GU10x3	Dimension	540x60x180 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium	Max Power	35W Each

SKU: 9074 Black GU10x3  
 SKU: 9078 White GU10x3


**Spotlight Fixture - Two Heads**  
**GU10 Fitting**


90°



GU10 Holder



IP20

Product code	OT1-A6	IP Rating	IP20
Socket	GU10x2	Dimension	300x60x180mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium	Max Power	35W Each

SKU: 9073 Black GU10x2  
 SKU: 9077 White GU10x2


**Spotlight Fixture - Four Heads**  
**GU10 Fitting**


90°



GU10 Holder



IP20

Product code	OT1-A6	IP Rating	IP20
Socket	GU10x4	Dimension	720x60x180 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium	Max Power	35W Each

SKU: 9075 Black GU10x4  
 SKU: 9079 White GU10x4


**Hanging Fixture - H300mm**  
**GU10 Fitting**


Product code	OT1-A6	IP Rating	IP20
Socket	GU10	Dimension	60x300 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium	Max Power	35W

SKU: 9050	Black - Inner range: Gold
SKU: 9051	Black - Inner range: Black
SKU: 9054	White - Inner range: Gold
SKU: 9055	White - Inner range: Black


**Hanging Fixture - H500mm**  
**GU10 Fitting**


Product code	OT1-A6	IP Rating	IP20
Socket	GU10	Dimension	60x500 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium	Max Power	35W

SKU: 9058	Black Body
SKU: 9059	White Body


**Hanging Fixture - H500mm**  
**GU10 Fitting**


Product code	OT1-A6	IP Rating	IP20
Socket	GU10	Dimension	60x500 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium	Max Power	35W

SKU: 9052	Black - Inner range: Gold
SKU: 9053	Black - Inner range: Black
SKU: 9056	White - Inner range: Gold
SKU: 9057	White - Inner range: Black


**Hanging Fixture - H200mm**  
**GU10 Fitting**


Product code	OT1-A6	IP Rating	IP20
Socket	GU10	Dimension	60x200 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium	Max Power	35W

SKU: 9060	Black Body
SKU: 9061	White Body


 Hanging Fixture - H300mm  
**GU10 Fitting**


Product code	OT1-A6	IP Rating	IP20
Socket	GU10	Dimension	55x300 mm
Input Voltage	AC : 220-240V	Body Colors	B/W/G/CG/C
Material	Aluminium	Max Power	35W

SKU: 9062	Black Body
SKU: 9063	White Body
SKU: 9064	Gold Body
SKU: 9065	Coffee Gold Body
SKU: 9066	Chrome Body

 Hanging Fixture - H300mm  
**GU10 Fitting**


Product code	OT1-A6	IP Rating	IP20
Socket	GU10	Dimension	55x300 mm
Input Voltage	AC : 220-240V	Body Colors	B/W/G/CG/C
Material	Aluminium	Max Power	35W

SKU: 9067	Black Body
SKU: 9068	White Body
SKU: 9069	Gold Body
SKU: 9070	Coffee Gold Body
SKU: 9071	Chrome Body



Hanging Fixture - H400mm  
**GU10 Fitting**



Product code	OT1-A6	IP Rating	IP20
Socket	GU10	Dimension	60x400 mm
Input Voltage	AC : 220-240V	Body Colors	B/W/S/GR
Material	Aluminium	Max Power	35W

SKU: 9082	Black Body
SKU: 9083	White Body
SKU: 9080	Silver Body
SKU: 9081	Grape Red Body

Hanging Fixture - H400mm  
**E27 Fitting**



Product code	OT1-A6	IP Rating	IP20
Socket	E27	Dimension	40x400 mm
Input Voltage	AC : 220-240V	Body Colors	B/W/CG/RG
Material	Aluminium	Max Power	35W

SKU: 9084	Black Body
SKU: 9085	White Body
SKU: 9086	Coffee Gold Body
SKU: 9087	Rose Gold Body



## LED TUBES AND BATTEN LIGHTS

LED tubes are the perfect replacement for old fluorescent tubes. With variety of sizes, powers and colour temperatures they are suitable for every need – from home use to office or warehouses.

### Features:

- Up to 80% power saving
- Standard sizes, fits already built lighting solutions
- Variety of colour temperatures
- Single or two side power
- Build-in starters
- Variety of covers – from nano-plastic to glass

### Application:

- Indoor use – home, offices, shops
- Main lighting
- Suitable for tube fixtures



Switch




LED TUBE T5 - Plastic  
**Matt With Switch**



**3.4W**  
300  
Lumens


Watts	3.4W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	320lm	IP Rating	IP20



SKU: 5588 6000K  
SKU:5589 4000K  
SKU: 5590 3000K

**6.5W**  
600  
Lumens


Watts	6.5W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	600lm	IP Rating	IP20



SKU: 5591 6000K  
SKU:5592 4000K  
SKU: 5593 3000K

**9.6W**  
900  
Lumens


Watts	12W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	900lm	IP Rating	IP20



SKU: 5594 6000K  
SKU:5595 4000K  
SKU: 5596 3000K

**13W**  
1200  
Lumens

Watts	13W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1200lm	IP Rating	IP20



SKU: 5597 6000K  
SKU:5598 4000K  
SKU: 5599 3000K



T5 DOUBLE INPUT CABLE  
Not Included  
Length: 30cm / 50cm / 100cm




LED TUBE T5 - Plastic  
**Matt**



**3.4W**  
300  
Lumens


Watts	3.4W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	320lm	IP Rating	IP20



SKU: 5501 6000K  
SKU:5502 4000K  
SKU: 5503 3000K

**6.5W**  
600  
Lumens


Watts	6.5W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	600lm	IP Rating	IP20



SKU: 5504 6000K  
SKU:5505 4000K  
SKU: 5506 3000K

**9.6W**  
900  
Lumens


Watts	12W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	900lm	IP Rating	IP20



SKU: 5507 6000K  
SKU:5508 4000K  
SKU: 5509 3000K

**13W**  
1200  
Lumens

Watts	13W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1200lm	IP Rating	IP20



SKU: 5538 6000K  
SKU:5539 4000K  
SKU: 5540 3000K




With Starter

LED TUBE T8 **PF>0.9****High Lumen****Nano Plastic - One Side Power****NEW**
**140**  
 Lumen/W


**HIGH**  
 Lumens


**270°**
**IP20**
**9W**
**1260**  
 Lumens

Product code	TU9-A3	Beam Angle	270°
Watts	9W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	1260lm	Instant Start	<0.5s



 SKU: 15541    SKU:15542  
 6000K    4000K


With Starter


LED TUBE T8 **PF>0.9****Nano Plastic - One Side Power****NEW**
**HIGH**  
 Lumens


**270°**
**IP20**
**9W**
**900**  
 Lumens


Product code	TU9-A3	Beam Angle	270°
Watts	9W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	900lm	Instant Start	<0.5s


 SKU: 15511    SKU:15512    SKU: 15513  
 6000K    4000K    3000K
**18W**
**2520**  
 Lumens


Product code	TU18-A3	Beam Angle	270°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	2520lm	Instant Start	<0.5s


 SKU: 15544    SKU:15545  
 6000K    4000K
**18W**
**1800**  
 Lumens


Product code	TU18-A3	Beam Angle	270°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	1800lm	Instant Start	<0.5s


 SKU: 15514    SKU:15515    SKU: 15516  
 6000K    4000K    3000K
**22W**
**3080**  
 Lumens

Product code	TU22-A3	Beam Angle	270°
Watts	22W	CRI	Ra>80
Input Voltage	AC : 175-250V	IP Rating	IP20
Flux	3080lm	Instant Start	<0.5s



 SKU: 15547    SKU:15548  
 6000K    4000K
**22W**
**2400**  
 Lumens

Product code	TU22-A3	Beam Angle	270°
Watts	22W	CRI	Ra>80
Input Voltage	AC : 220-250V	IP Rating	IP20
Flux	2400lm	Instant Start	<0.5s


 SKU: 15517    SKU:15518    SKU: 15519  
 6000K    4000K    3000K



With Starter



Rotatable

LED TUBE T8 **PF>0.9****High Lumen****Nano Plastic - One Side Power**

 5  
 Years  
 Warranty


 160  
 Lumen/W


 HIGH  
 Lumens


270°

IP20

**12W**  

 1920  
 Lumens

Product code	TU12-A3	Beam Angle	270°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 175-250V	IP Rating	IP20
Flux	1920lm	Instant Start	<0.5s




SKU: 5544	SKU: 5545	SKU: 5546
6000K	4500K	2800K

**16W**  

 2560  
 Lumens

Product code	TU16-A3	Beam Angle	270°
Watts	16W	CRI	Ra>80
Input Voltage	AC : 175-250V	IP Rating	IP20
Flux	2560lm	Instant Start	<0.5s



SKU: 5549
2800K



With Starter



Rotatable

LED TUBE T8 **PF>0.9****Nano Plastic - One Side Power**

 5  
 Years  
 Warranty


 HIGH  
 Lumens


270°

IP20

**9W**  

 900  
 Lumens

Product code	TU9-A3	Beam Angle	270°
Watts	9W	CRI	Ra>80
Input Voltage	AC : 175-250V	IP Rating	IP20
Flux	900lm	Instant Start	<0.5s




SKU: 5511	SKU: 5512	SKU: 5513
6000K	4500K	2800K

**18W**  

 1800  
 Lumens

Product code	TU18-A3	Beam Angle	270°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-240V	IP Rating	IP20
Flux	1800lm	Instant Start	<0.5s




SKU: 5514	SKU: 5515	SKU: 5516
6000K	4500K	2800K

**22W**  

 2400  
 Lumens

Product code	TU22-A3	Beam Angle	270°
Watts	22W	CRI	Ra>80
Input Voltage	AC : 175-250V	IP Rating	IP20
Flux	2400lm	Instant Start	<0.5s




SKU: 5517	SKU: 5518	SKU: 5519
6000K	4500K	2800K




LED TUBE T8 **PF>0.9****PRO - Line****Glass - One Side Power****9W**
**1000**  
 Lumens


Product code	TU9-A4	Beam Angle	270°
Watts	9W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1000lm	Instant Start	<0.5s


 SKU: 5614    SKU:5615  
 6000K    4500K
LED TUBE T8 **PF>0.9****City Line****Glass - One Side Power****9W**
**900**  
 Lumens


Product code	TU9-A2	Beam Angle	270°
Watts	9W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	900lm	Instant Start	<0.5s


 SKU: 5601    SKU:5602    SKU: 5603  
 6000K    4500K    2800K
**18W**
**2100**  
 Lumens


Product code	TU18-A4	Beam Angle	270°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	2100lm	Instant Start	<0.5s


 SKU: 5617    SKU:5618  
 6000K    4500K
**18W**
**1800**  
 Lumens


Product code	TU18-A2	Beam Angle	270°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1800lm	Instant Start	<0.5s


 SKU: 5604    SKU:5605    SKU: 5606  
 6000K    4500K    2800K
**24W**
**2800**  
 Lumens

Product code	TU24-A1	Beam Angle	270°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3000lm	Instant Start	<0.5s



 SKU: 5610    SKU:5611  
 6000K    4500K
**22W**
**2200**  
 Lumens

Product code	TU22-A2	Beam Angle	270°
Watts	22W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	2200lm	Instant Start	<0.5s


 SKU: 5607    SKU:5608    SKU: 5609  
 6000K    4500K    2800K



With Starter



**LED TUBE T8 PF>0.9**  
**Professional edition**  
**Aluminium-One Side Power**


140°

IP20

**9W**  
  
**810**  
 Lumens


Product code	TU9-A1	Beam Angle	140°
Watts	9W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	810lm	Instant Start	<0.5s


 SKU: 5611-M  
 6000K

 SKU: 5612-M  
 2800K

**18W**  
  
**1440**  
 Lumens

Product code	TU18-A1	Beam Angle	140°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1440lm	Instant Start	<0.5s


 SKU: 5624-M  
 2800K


**LED TUBE T8**  
**Home edition**  
**Glass - One Side Power**
**NEW**


270°

IP20

**9W**  
  
**720**  
 Lumens


Product code	TU9-A2	Beam Angle	270°
Watts	9W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	720lm	Instant Start	<0.5s



 SKU: 5626  
 6000K

 SKU: 5627  
 4000K

**18W**  
  
**1440**  
 Lumens


Product code	TU18-A2	Beam Angle	270°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1440lm	Instant Start	<0.5s



 SKU: 5629  
 6000K

 SKU: 5630  
 4000K

**22W**  
  
**1760**  
 Lumens

Product code	TU22-A2	Beam Angle	270°
Watts	22W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1760lm	Instant Start	<0.5s


 SKU: 5628  
 6000K

 SKU: 5631  
 4000K



M12 cable gland



LED FIXTURES WITH T8 TUBES

**Single City Line - Glass PF>0.9**

**One Side Power**




**9W**



900 Lumens

Product code	OT1-A9	Beam Angle	180°
Watts	9W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	900lm	Instant Start	<0.5s




SKU: 6731 6000K  
SKU: 6732 4500K

**18W**



1800 Lumens

Product code	OT1-A9	Beam Angle	180°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	1800lm	Instant Start	<0.5s



SKU: 6735 6000K  
SKU: 6736 4500K

**22W**



2200 Lumens

Product code	OT1-A9	Beam Angle	180°
Watts	22W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	2200lm	Instant Start	<0.5s



SKU: 6739 6000K  
SKU: 6740 4500K




Single T8 Tube Fixture - Without Tubes

**For One Side Power**

SKU: 6650 For Single LED Tube 9W-60cm

SKU: 6652 For Single LED Tube 18W-120cm

SKU: 6654 For Single LED Tube 22W-150cm



M12 cable gland



LED FIXTURES WITH T8 TUBES

**Double City Line - Glass PF>0.9**

**One Side Power**




**2\*9W**



1800 Lumens

Product code	OT1-B1	Beam Angle	180°
Watts	2*9W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	1800lm	Instant Start	<0.5s




SKU: 6733 6000K  
SKU: 6734 4500K

**2\*18W**



3600 Lumens

Product code	OT1-B1	Beam Angle	180°
Watts	2*18W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	3600lm	Instant Start	<0.5s



SKU: 6737 6000K  
SKU: 6738 4500K

**2\*22W**



4400 Lumens

Product code	OT1-B1	Beam Angle	180°
Watts	2*22W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	4400lm	Instant Start	<0.5s



SKU: 6741 6000K  
SKU: 6742 4500K




Double T8 Tube Fixture - Without Tubes

**For One Side Power**

SKU: 6651 For Two LED Tube 9W-60cm

SKU: 6653 For Two LED Tube 18W-120cm

SKU: 6655 For Two LED Tube 22W-150cm






M12 cable gland

**NEW**



Linkable

**40W LED**  
IP65 Fixture Type  
**Linkable**



180°



IP65

<b>40W</b>	Product code	OT40-A1	Beam Angle	180°
<b>4000</b> Lumens	Watts	40W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	4000lm	Instant Start	<0.5s

SKU: 16701    SKU:16702  
6000K    4500K




M12 cable gland

**NEW**



Linkable

**55W LED**  
IP65 Fixture Type  
**Linkable**



180°



IP65

<b>55W</b>	Product code	OT55-A1	Beam Angle	180°
<b>6000</b> Lumens	Watts	55W	CRI	Ra>80
	Input Voltage	AC : 220-240v	IP Rating	IP65
	Flux	6000lm	Instant Start	<0.5s

SKU: 16703    SKU:16704  
6000K    4500K

<b>40W</b>	Product code	OT40-A1	Beam Angle	180°
<b>4000</b> Lumens	Watts	40W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	4000lm	Instant Start	<0.5s



Sensor

SKU: 16705    SKU:16706  
6000K    4500K

<b>55W</b>	Product code	OT55-A1	Beam Angle	180°
<b>6000</b> Lumens	Watts	55W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	6000lm	Instant Start	<0.5s



Sensor

SKU: 16707    SKU:16708  
6000K    4500K

<b>40W</b>	Product code	TU40-A1	Beam Angle	180°
<b>4000</b> Lumens	Watts	40W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	4000lm	Instant Start	<0.5s



Emergency

SKU: 16709    SKU:16710  
6000K    4500K

<b>55W</b>	Product code	OT55-A1	Beam Angle	180°
<b>6000</b> Lumens	Watts	55W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	6000lm	Instant Start	<0.5s



Emergency

SKU: 16711    SKU:16712  
6000K    4500K




M12 cable gland



Stainless steel clips

**40W LED**  
IP65 Fixture Type  
**Stainless steel clips**



<b>40W</b> <b>4000</b> Lumens	Product code	OT40-A1	Beam Angle	180°
	Watts	40W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	4000lm	Instant Start	<0.5s

SKU: 6701    SKU:6702  
6000K    4500K

<b>40W</b> <b>4000</b> Lumens	Product code	OT40-A1	Beam Angle	180°
	Watts	40W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	4000lm	Instant Start	<0.5s



SKU: 6705    SKU:6706  
6000K    4500K

<b>40W</b> <b>4000</b> Lumens	Product code	TU40-A1	Beam Angle	180°
	Watts	40W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	4000lm	Instant Start	<0.5s



SKU: 6709    SKU:6710  
6000K    4500K





M12 cable gland



Stainless steel clips

**55W LED**  
IP65 Fixture Type  
**Stainless steel clips**



<b>55W</b> <b>6000</b> Lumens	Product code	OT55-A1	Beam Angle	180°
	Watts	55W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	6000lm	Instant Start	<0.5s

SKU: 6703    SKU:6704  
6000K    4500K

<b>55W</b> <b>6000</b> Lumens	Product code	OT55-A1	Beam Angle	180°
	Watts	55W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	6000lm	Instant Start	<0.5s



SKU: 6707    SKU:6708  
6000K    4500K

<b>55W</b> <b>6000</b> Lumens	Product code	OT55-A1	Beam Angle	180°
	Watts	55W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	6000lm	Instant Start	<0.5s



SKU: 6711    SKU:6712  
6000K    4500K


**Single T8 Fixture  
for LED One Side Power Tube**


Product code	OT1-A7	IP Rating	IP20
Socket	T8	Dimension	606x33mm;1250x33mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Metal+PC	Max Power	100W

SKU: 6745	1xT8-60cm Tube
SKU: 6746	1xT8-120cm Tube
SKU: 6749	1xT8-150cm Tube


**Double T8 Fixture  
for LED One Side Power Tube**



Product code	OT1-A7	IP Rating	IP20
Socket	2xT8	Dimension	606x73mm;1250x73mm
Input Voltage	AC : 220-240V	Body Colors	White
Material	Metal+PC	Max Power	100W

SKU: 6747	2xT8-60cm Tube
SKU: 6748	2xT8-120cm Tube
SKU: 6750	2xT8-150cm Tube


**LED Batten Light PF>0.9  
Stainless steel clips**


**10W**  
**1150**  
 Lumens


Product code	OT10-A2	Beam Angle	120°
Watts	10W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	1150lm	Instant Start	<0.5s



SKU: 6671	SKU:6672	SKU: 6673
6000K	4000K	2800K

**20W**  
**2300**  
 Lumens


Product code	OT20-A1	Beam Angle	120°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	2300lm	Instant Start	<0.5s



SKU: 6674	SKU:6675	SKU: 6676
6000K	4000K	2800K

**40W**  
**3320**  
 Lumens


Product code	OT40-A4	Beam Angle	120°
Watts	40W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3320lm	Instant Start	<0.5s



SKU: 6677	SKU:6678	SKU: 6679
6000K	4000K	2800K

**50W**  
**4150**  
 Lumens

Product code	OT50-A1	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	4150lm	Instant Start	<0.5s



SKU: 6680	SKU:6681
6000K	4000K

LED Batten Lights **PF>0.9****Waterproof IP65**

120°




IP65

**20W****1600**


Lumens

Product code	OT20-A2	Beam Angle	120°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	1600lm	Instant Start	<0.5s


 SKU: 6691  
 6000K
 SKU:6692  
4000K
**40W****3200**


Lumens

Product code	OT40-A5	Beam Angle	120°
Watts	40W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	3200lm	Instant Start	<0.5s


 SKU: 6694  
 6000K
 SKU:6695  
4000K
**50W****4150**

Lumens

Product code	OT50-A2	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	4150lm	Instant Start	<0.5s


 SKU: 6697  
 6000K
 SKU:6698  
4000K


M12 cable gland

LED Light Fitting **PF>0.9****Stainless steel clips****With fast M12 cable gland**Flicker Free  
LED

180°




IP65

**18W****1800**


Lumens

Product code	OT18-A1	Beam Angle	180°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	1800lm	Instant Start	<0.5s


 SKU: 6721  
 6000K
 SKU:6722  
4000K
**36W****3600**


Lumens

Product code	OT36-A1	Beam Angle	180°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 175-250V	IP Rating	IP65
Flux	3600lm	Instant Start	<0.5s


 SKU: 6723  
 6000K
 SKU:6724  
4000K
**45W****4500**

Lumens

Product code	OT45-A1	Beam Angle	180°
Watts	45W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	4500lm	Instant Start	<0.5s


 SKU: 6725  
 6000K
 SKU:6726  
4000K



Industry-wide requirement throughout the entire world now, a prerequisite for all residential and business sites, OPTONICA LED covers all major subcategories.

Features:

- Up to 80% power saving
- Self-test mode with battery state indicator
- Various directions pictograms included
- 3 hours emergency operation
- Highly reliable with instant automatic on.

Application:

- Suitable for residential, industrial and commercial projects





## EMERGENCY LED EXIT SIGN

An emergency light is a battery-backed lighting device that switches on automatically when a building experiences a power outage.

All bulkhead and exit signs include 4 pictograms:



Battery

### ● Left Arrow



### ● Right Arrow



### ● UP Arrow



### ● EXIT



### EMERGENCY LED EXIT SIGN

#### Wall / Surface Mount

Product code	WW1-A1
Watts	3W
Input Voltage	AC : 220-240V
IP Rating	IP20
Battery	3.6V 900mAh Ni-Cd battery
Emergency Duration	> 3 Hours

 SKU: 7203 White Light ■ 6000K


Battery



### EMERGENCY LED EXIT SIGN

#### Wall / Surface Mount

Product code	WW1-A1
Watts	3W
Input Voltage	AC : 220-240V
IP Rating	IP20
Battery	3.6V 900mAh Ni-Cd battery
Emergency Duration	> 3 Hours

 SKU: 7204 White Light ■ 6000K


Battery



### EMERGENCY LED EXIT SIGN

#### Recessed Fixed

Product code	WW1-A1
Watts	3W
Input Voltage	AC : 220-240V
IP Rating	IP20
Battery	3.6V 900mAh Ni-Cd battery
Emergency Duration	> 3 Hours

 SKU: 7206 White Light ■ 6000K


Battery



### EMERGENCY LED EXIT SIGN

#### Recessed Hanging

Product code	WW1-A1
Watts	3W
Input Voltage	AC : 220-240V
IP Rating	IP20
Battery	3.6V 900mAh Ni-Cd battery
Emergency Duration	> 3 Hours


 SKU: 7205 White Light ■ 6000K


Battery



## EMERGENCY LED EXIT SIGN

**Bulkhead**

Product code	WW1-A1	 Battery
Watts	4W	
Input Voltage	AC : 220-240V	
IP Rating	IP65	
Battery	3.6V 1500mAh Ni-Cd battery	
Emergency Duration	> 3 Hours	


SKU: 7201 White Light 

SKU: 7202 Recessed kit for SKU: 7201



## EMERGENCY LED EXIT SIGN


**Wall Mounted**

Product code	WW1-A1	 Battery
Watts	3W	
Input Voltage	AC : 220-240V	
IP Rating	IP20	
Battery	3.6V 1200mAh Ni-Cd battery	
Emergency Duration	> 3 Hours	

SKU: 7207 White Light 

## EMERGENCY LED TWINSPOTS 3W


**Wall Mount - Self Test**

Product code	WW1-A2	 280 Lumens
Watts	2x3 pcs 0.5W	
Input Voltage	AC : 220-240V	
IP Rating	IP20	
Battery	3.6V 1800mAh	
Emergency Duration	> 3 Hours	

SKU: 7208 White Light 

## EMERGENCY LED TWINSPOTS 6W


**Wall Mount - Self Test**

Product code	WW1-A2	 450 Lumens
Watts	2x6 pcs 0.5W	
Input Voltage	AC : 220-240V	
IP Rating	IP20	
Battery	3.6V 3000mAh	
Emergency Duration	> 3 Hours	

SKU: 7209 White Light 

## EMERGENCY LED LIGHT


**Downlight**

Product code	WW1-A3	 250 Lumens
Watts	3W	
Input Voltage	AC : 220-240V	
IP Rating	IP20	
Battery	3.6V 1800mAh	
Emergency Duration	> 3 Hours	

SKU: 7210 White Light OSRAM  
Chips

## EMERGENCY LED LIGHT

**Downlight - Osram chip**

Product code	WW1-A3	 460 Lumens
Watts	3W	
Input Voltage	AC : 220-240V	
IP Rating	IP20	
Battery	3.6V 1800mAh	
Emergency Duration	> 3 Hours	

SKU: 7211 White Light 




Allowing full flexibility of installation on every hard surface so there are no more design restraints.

**Features:**

- Up to 80% power saving
- Variety of colour temperatures
- Glossy or matt finishing
- Standard sizes
- Variety of powers

**Application:**

- Extremely wide indoor application use – home, office, retail, hospitals, restaurants, indoor parking lots, manufacturing spaces

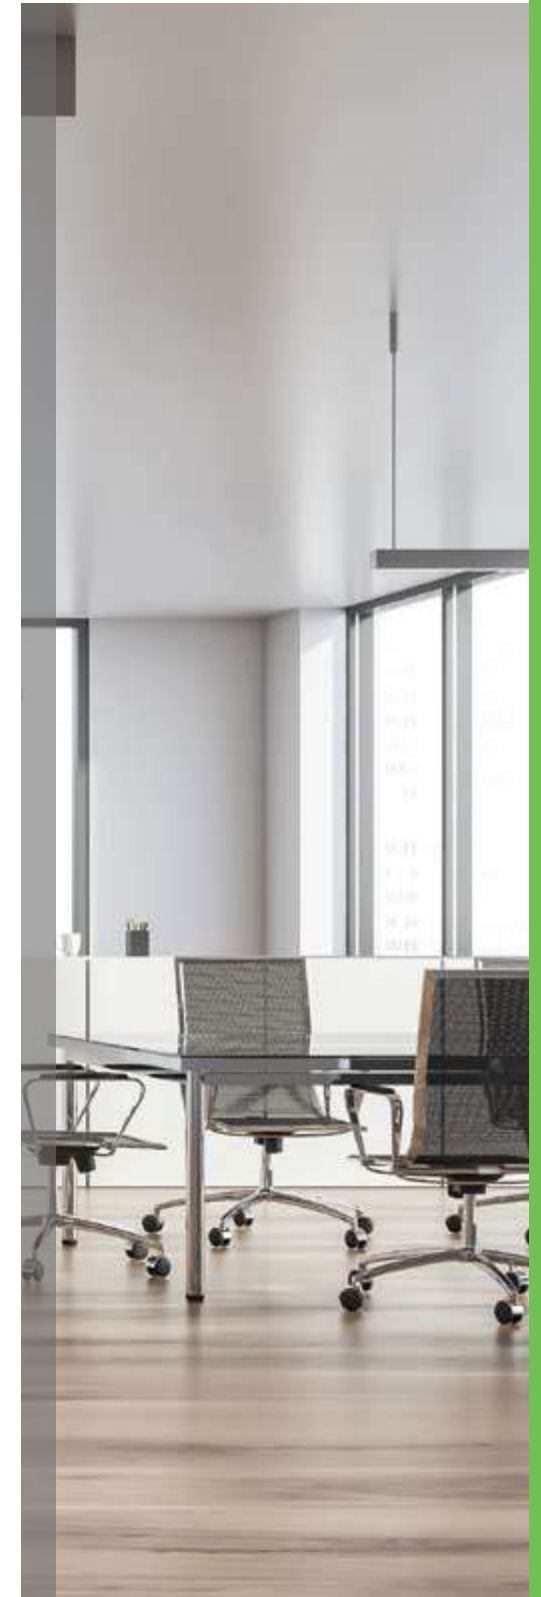



**3** Years  
Warranty

100°

IP44



Color Changing knob

## CCT - SURFACE LED PANELS

**ROUND Build-in Driver****6W**

Product code DL6-A3

Watts 6W

Input Voltage AC : 165-265V


Flux 450lm

Beam Angle 100°

CRI Ra>80

IP Rating IP44 Front

Dimension ø115x32mm



SKU: 2535

CCT - Steps



**3** Years  
Warranty

100°

IP44



Color Changing Knob

## CCT - SURFACE LED PANELS

**SQUARE Build-in Driver****6W**

Product code DL6-A3

Watts 6W

Input Voltage AC : 165-265V


Flux 450lm

Beam Angle 100°

CRI Ra>80

IP Rating IP44 Front

Dimension 122x122x35mm



SKU: 2539

CCT - Steps

**12W**

Product code DL12-A3

Watts 12W

Input Voltage AC : 165-265V


Flux 950lm

Beam Angle 100°

CRI Ra>80

IP Rating IP44 Front

Dimension ø170x32mm



SKU: 2536

CCT - Steps

**12W**

Product code DL12-A3

Watts 12W

Input Voltage AC : 165-265V


Flux 950lm

Beam Angle 100°

CRI Ra>80

IP Rating IP44 Front

Dimension 172x172x35mm



SKU: 2540

CCT - Steps

**18W**

Product code DL18-A3

Watts 18W

Input Voltage AC : 165-265V


Flux 1450lm

Beam Angle 100°

CRI Ra>80

IP Rating IP44 Front

Dimension ø220x32mm



SKU: 2537

CCT - Steps

**18W**

Product code DL18-A3

Watts 18W

Input Voltage AC : 165-265V


Flux 1450lm

Beam Angle 100°

CRI Ra>80

IP Rating IP44 Front

Dimension 227x227x35mm



SKU: 2541

CCT - Steps

**24W**

Product code DL24-A3

Watts 24W

Input Voltage AC : 165-265V


Flux 2565lm

Beam Angle 100°

CRI Ra>80

IP Rating IP44 Front

Dimension ø240x32mm



SKU: 2538

CCT - Steps

**24W**

Product code DL24-A3

Watts 24W

Input Voltage AC : 165-265V


Flux 2150lm

Beam Angle 100°

CRI Ra>80

IP Rating IP44 Front

Dimension 227x227x35mm



SKU: 2542

CCT - Steps

**NEW**

120°



NON-Dimmable



IP20




## LED BACKLIT SURFACE PANELS

**ROUND - Driver-on-board****Home Edition****6W****360**


Lumens

Product code	DL6-B1	Beam Angle	120°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	360lm	Material	Plastic


 SKU: 2975  
 6000K
 SKU: 2976  
4500K
SKU: 2977  
2700K
**12W****840**


Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	840lm	Cutting Size	Plastic


 SKU: 2978  
 6000K
 SKU: 2979  
4500K
SKU: 2980  
2700K
**18W****1350**


Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	1350lm	Cutting Size	Plastic


 SKU: 2981  
 6000K
 SKU: 2982  
4500K
SKU: 2983  
2700K
**24W****1920**

Lumens

Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	1920lm	Cutting Size	Plastic


 SKU: 2984  
 6000K
 SKU: 2985  
4500K
SKU: 2986  
2700K
**NEW**

120°



NON-Dimmable



IP20




## LED BACKLIT SURFACE PANELS

**SQUARE - Driver-on-board****Home Edition****6W****360**


Lumens

Product code	DL6-B1	Beam Angle	120°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	360lm	Material	Plastic


 SKU: 2987  
 6000K
 SKU: 2988  
4500K
SKU: 2989  
2700K
**12W****840**


Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	840lm	Material	Plastic


 SKU: 2990  
 6000K
 SKU: 2991  
4500K
SKU: 2992  
2700K
**18W****1350**


Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	1350lm	Material	Plastic


 SKU: 2993  
 6000K
 SKU: 2994  
4500K
SKU: 2995  
2700K
**24W****1920**

Lumens

Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	1920lm	Material	Plastic


 SKU: 2996  
 6000K
 SKU: 2997  
4500K
SKU: 2998  
2700K



## LED SURFACE PANELS

**ROUND - HOME EDITION**

120°




IP20

**6W****480**

Lumens

Product code	DL6-B1	Beam Angle	120°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 180-260V	IP Rating	IP20
Flux	480lm	Dimension	ø117x28mm




SKU: 2401   SKU: 2402   SKU: 2403  
 6000K   4000K   2800K

**12W****960**

Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 180-260V	IP Rating	IP20
Flux	960lm	Dimension	ø160x28mm




SKU: 2404   SKU: 2405   SKU: 2406  
 6000K   4000K   2800K

**18W****1440**

Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 180-260V	IP Rating	IP20
Flux	1440lm	Dimension	ø205x28mm




SKU: 2407   SKU: 2408   SKU: 2409  
 6000K   4000K   2800K

**24W****1920**

Lumens

Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 180-260V	IP Rating	IP20
Flux	1920lm	Dimension	ø285x28mm



SKU: 2410   SKU: 2411   SKU: 2412  
 6000K   4000K   2800K



## LED SURFACE PANELS

**SQUARE - HOME EDITION**

120°




IP20

**6W****480**

Lumens

Product code	DL6-B1	Beam Angle	120°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 180-260V	IP Rating	IP20
Flux	480lm	Dimension	118x118x28mm




SKU: 2413   SKU: 2414   SKU: 2415  
 6000K   4000K   2800K

**12W****960**

Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 180-260V	IP Rating	IP20
Flux	960lm	Dimension	160x160x28mm




SKU: 2416   SKU: 2417   SKU: 2418  
 6000K   4000K   2800K

**18W****1440**

Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 180-260V	IP Rating	IP20
Flux	1440lm	Dimension	208x208x28mm




SKU: 2419   SKU: 2420   SKU: 2421  
 6000K   4000K   2800K

**24W****1920**

Lumens


Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 180-260V	IP Rating	IP20
Flux	1920lm	Dimension	288x288x28mm




SKU: 2422   SKU: 2423   SKU: 2424  
 6000K   4000K   2800K



LED SURFACE PANELS  
**ROUND**




<b>6W</b>	Product code	DL6-A1	Beam Angle	120°
<b>480</b>	Watts	6W	CRI	Ra>80
Lumens	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	480lm	Dimension	ø120x38mm




SKU: 2231    SKU:2243    SKU: 2232  
■ 6000K    ■ 4000K    ■ 2800K

<b>12W</b>	Product code	DL12-A1	Beam Angle	120°
<b>960</b>	Watts	12W	CRI	Ra>80
Lumens	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	960lm	Dimension	ø172x38mm




SKU: 2244    SKU:2245    SKU: 2246  
■ 6000K    ■ 4000K    ■ 2800K

<b>18W</b>	Product code	DL18-A1	Beam Angle	120°
<b>1440</b>	Watts	18W	CRI	Ra>80
Lumens	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	1440lm	Dimension	ø225x38mm



SKU: 2235    SKU:2247    SKU: 2236  
■ 6000K    ■ 4000K    ■ 2800K

<b>24W</b>	Product code	DL24-A1	Beam Angle	120°
<b>1920</b>	Watts	24W	CRI	Ra>80
Lumens	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	1920lm	Dimension	ø300x38mm




SKU: 2248    SKU:2249    SKU: 2250  
■ 6000K    ■ 4000K    ■ 2800K

LED SURFACE PANELS  
**SQUARE**




<b>6W</b>	Product code	DL6-A1	Beam Angle	120°
<b>480</b>	Watts	6W	CRI	Ra>80
Lumens	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	480lm	Dimension	120x120x38mm




SKU: 2237    SKU:2251    SKU: 2238  
■ 6000K    ■ 4000K    ■ 2800K

<b>12W</b>	Product code	DL12-A1	Beam Angle	120°
<b>960</b>	Watts	12W	CRI	Ra>80
Lumens	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	960lm	Dimension	167x167x38mm




SKU: 2252    SKU:2253    SKU: 2254  
■ 6000K    ■ 4000K    ■ 2800K

<b>18W</b>	Product code	DL18-A1	Beam Angle	120°
<b>1440</b>	Watts	18W	CRI	Ra>80
Lumens	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	1440lm	Dimension	220x220x32mm



SKU: 2241    SKU:2255    SKU: 2242  
■ 6000K    ■ 4000K    ■ 2800K

<b>24W</b>	Product code	DL24-A1	Beam Angle	120°
<b>1920</b>	Watts	24W	CRI	Ra>80
Lumens	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	1920lm	Dimension	295x295x32mm



SKU: 2256    SKU:2257    SKU: 2258  
■ 6000K    ■ 4000K    ■ 2800K



LED ceiling lights are increasingly popular and are available in all shapes and sizes, with high-quality fittings available for any type of room. Whether you have a stately home or a terraced house, you can use these lamps to good effect.

**Features:**


- Up to 80% power saving
- Variety of colour temperatures
- Glossy or matt finishing
- Standard sizes
- Variety of powers

**Application:**

- Suspended ceilings
- Indoor use – home or office
- Large spaces





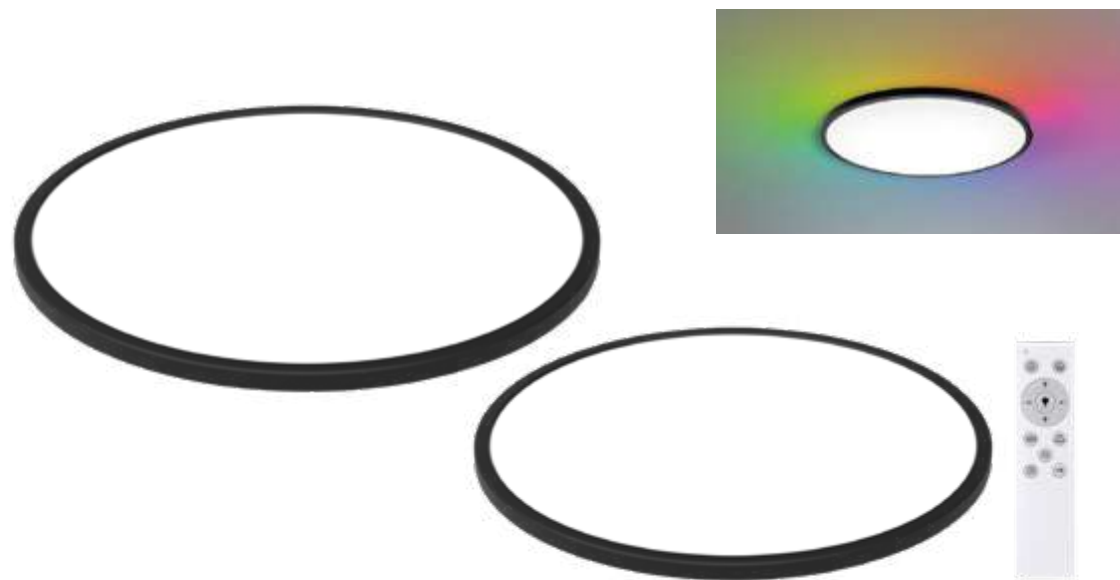

LED CEILING LIGHTS


**Black Round - CCT + RGB**



**18W**

1440 Lumens

Watts	18W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1440lm	IP Rating	IP20




SKU: 2941  
RGB + CCT  
6000K 4500K 3000K

**24W**

1920 Lumens

Watts	24W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1920lm	IP Rating	IP20




SKU: 2942  
RGB + CCT  
6000K 4500K 3000K


**32W**

2565 Lumens

Watts	32W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	2565lm	IP Rating	IP20



SKU: 2943  
RGB + CCT  
6000K 4500K 3000K

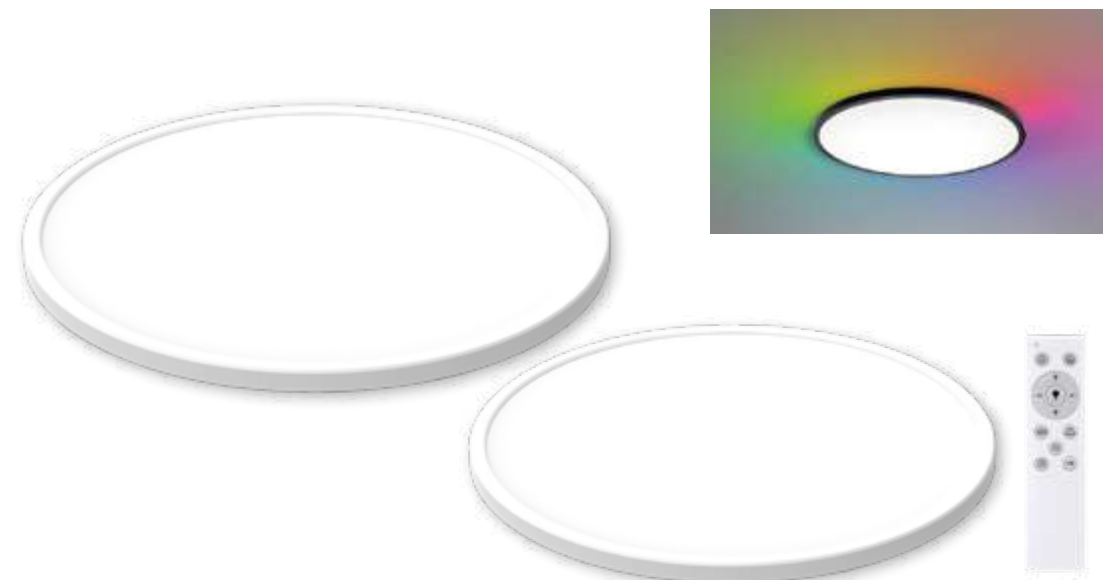

LED CEILING LIGHTS


**White Round - CCT + RGB**



**18W**

1440 Lumens

Watts	18W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1440lm	IP Rating	IP20




SKU: 2944  
RGB + CCT  
6000K 4500K 3000K

**24W**

1920 Lumens

Watts	24W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1920lm	IP Rating	IP20




SKU: 2945  
RGB + CCT  
6000K 4500K 3000K

**32W**

2565 Lumens

Watts	32W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	2565lm	IP Rating	IP20



SKU: 2946  
RGB + CCT  
6000K 4500K 3000K



LED CEILING LIGHTS


**Round - CCT Switch**



**18W**

**1880**  
Lumens

Watts	18W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1880lm	IP Rating	IP54




SKU: 2501  
CCT  
6000K 4500K 3000K

**24W**

**2565**  
Lumens

Watts	24W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	2565lm	IP Rating	IP54




SKU: 2502  
CCT  
6000K 4500K 3000K

**18W**

**1880**  
Lumens



Watts	18W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1880lm	IP Rating	IP54



SKU: 2505  
CCT  
6000K 4500K 3000K



LED CEILING LIGHTS


**Square - CCT Switch**



**18W**

**1880**  
Lumens

Watts	18W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1880lm	IP Rating	IP54




SKU: 2503  
CCT  
6000K 4500K 3000K

**24W**

**2565**  
Lumens

Watts	24W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	2565lm	IP Rating	IP54




SKU: 2504  
CCT  
6000K 4500K 3000K

**18W**

**1880**  
Lumens



Watts	18W	Beam Angle	120°
Input Voltage	AC : 220-240V	CRI	Ra>80
Flux	1880lm	IP Rating	IP54



SKU: 2506  
CCT  
6000K 4500K 3000K



## LED CEILING LIGHTS

**Black Body - Round**

NON-Dimmable




120°



IP20

**18W**1350  
Lumens

Product code	PD18-A2	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-260V	IP Rating	IP20
Flux	1350lm	Body Color	Black


 SKU:2901  
 4500K

 SKU: 2902  
 3000K


## LED CEILING LIGHTS

**White Body - Round**

NON-Dimmable




120°



IP20


**18W**1350  
Lumens

Product code	PD18-A2	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-260V	IP Rating	IP20
Flux	1350lm	Body Color	White


 SKU:2903  
 4500K


 SKU: 2904  
 3000K
**30W**2250  
Lumens

Product code	PD30-A2	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 175-260V	IP Rating	IP20
Flux	2250lm	Body Color	Black


 SKU:2905  
 4500K


 SKU: 2906  
 3000K
**30W**2250  
Lumens

Product code	PD30-A2	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 175-260V	IP Rating	IP20
Flux	2250lm	Body Color	White


 SKU:2907  
 4500K


 SKU: 2908  
 3000K
**54W**4050  
Lumens

Product code	PD54-A2	Beam Angle	120°
Watts	54W	CRI	Ra>80
Input Voltage	AC : 175-260V	IP Rating	IP20
Flux	4050lm	Body Color	Black


 SKU:2909  
 4500K

 SKU: 2910  
 3000K
**54W**4050  
Lumens

Product code	PD54-A2	Beam Angle	120°
Watts	54W	CRI	Ra>80
Input Voltage	AC : 175-260V	IP Rating	IP20
Flux	4050lm	Body Color	White


 SKU:2911  
 4500K

 SKU: 2912  
 3000K

## LED CEILING LIGHTS

**36W - Black**

Product code DL36-A2  
 Watts 36W  
 Input Voltage AC : 175-260V  
 Flux 2700lm  
 Beam Angle 120°  
 Shape Round


SKU:2913    SKU: 2914  
 ■ 4500K    ■ 3000K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø500x80 mm  
 Body Color Black  
 Dimmable NO

**2700**  
Lumens

120°

IP20



## LED CEILING LIGHTS

**36W - White**

Product code DL36-A2  
 Watts 36W  
 Input Voltage AC : 175-260V  
 Flux 2700lm  
 Beam Angle 120°  
 Shape Round


SKU:2915    SKU: 2916  
 ■ 4500K    ■ 3000K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø500x80 mm  
 Body Color White  
 Dimmable NO

**2700**  
Lumens

120°

IP20



## LED CEILING LIGHTS

**64W - Black**

Product code DL64-A2  
 Watts 64W  
 Input Voltage AC : 175-260V  
 Flux 4800lm  
 Beam Angle 120°  
 Shape Round


SKU:2917    SKU: 2918  
 ■ 4500K    ■ 3000K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø800x80 mm  
 Body Color Black  
 Dimmable NO

**4800**  
Lumens

120°

IP20



## LED CEILING LIGHTS

**64W - White**

Product code DL64-A2  
 Watts 64W  
 Input Voltage AC : 175-260V  
 Flux 4800lm  
 Beam Angle 120°  
 Shape Round


SKU:2919    SKU: 2920  
 ■ 4500K    ■ 3000K

CRI Ra>80  
 IP Rating IP20  
 Dimension ø800x80 mm  
 Body Color White  
 Dimmable NO

**4800**  
Lumens

120°

IP20



## LED CEILING LIGHTS

**30W - Black**

Product code DL36-A2  
 Watts 36W  
 Input Voltage AC : 175-260V  
 Flux 2250lm  
 Beam Angle 120°  
 Shape Square


SKU:2921    SKU: 2922  
 ■ 4500K    ■ 3000K

CRI Ra>80  
 IP Rating IP20  
 Dimension 380x380 mm  
 Body Color Black  
 Dimmable NO

**2250**  
Lumens

120°

IP20



## LED CEILING LIGHTS

**30W - White**

Product code DL36-A2  
 Watts 36W  
 Input Voltage AC : 175-260V  
 Flux 2250lm  
 Beam Angle 120°  
 Shape Square


SKU:2923    SKU: 2924  
 ■ 4500K    ■ 3000K

CRI Ra>80  
 IP Rating IP20  
 Dimension 380x380 mm  
 Body Color White  
 Dimmable NO

**2250**  
Lumens

120°

IP20



## LED CEILING LIGHTS

**64W - Black**

Product code DL64-A2  
 Watts 64W  
 Input Voltage AC : 175-260V  
 Flux 4800lm  
 Beam Angle 120°  
 Shape Square


SKU:2925    SKU: 2926  
 ■ 4500K    ■ 3000K

CRI Ra>80  
 IP Rating IP20  
 Dimension 600x600 mm  
 Body Color Black  
 Dimmable NO

**4800**  
Lumens

120°

IP20



## LED CEILING LIGHTS

**64W - White**

Product code DL64-A2  
 Watts 64W  
 Input Voltage AC : 175-260V  
 Flux 4800lm  
 Beam Angle 120°  
 Shape Square


SKU:2927    SKU: 2928  
 ■ 4500K    ■ 3000K

CRI Ra>80  
 IP Rating IP20  
 Dimension 600x600 mm  
 Body Color White  
 Dimmable NO

**4800**  
Lumens

120°

IP20





Remote Control

LED CEILING LIGHTS

**Sandy White - Round**



Product code	DL72-A1	CRI	Ra>80
Watts	36x2W	IP Rating	IP20
Input Voltage	AC : 180-260V	Dimension	ø500x50 mm
Flux	5400lm	Body Color	White
Beam Angle	120°	Dimmable	NO
Shape	Round		

SKU: 2931 ← CCT →  
■ 6000K ■ 4500K ■ 3000K



Remote Control

LED CEILING LIGHTS

**Sandy White - Round**



Product code	DL96-A1	CRI	Ra>80
Watts	48x2W	IP Rating	IP20
Input Voltage	AC : 180-260V	Dimension	ø500x50 mm
Flux	7200lm	Body Color	White
Beam Angle	120°	Dimmable	NO
Shape	Round		

SKU: 2930 ← CCT →  
■ 6000K ■ 4500K ■ 3000K



Remote Control

LED CEILING LIGHTS

**Sandy White - Square**



Product code	DL120-A1	CRI	Ra>80
Watts	60x2W	IP Rating	IP20
Input Voltage	AC : 180-260V	Dimension	500x500x50 mm
Flux	9000lm	Body Color	White
Beam Angle	120°	Dimmable	NO
Shape	Square		

SKU: 2929 ← CCT → 3800156629295  
■ 6000K ■ 4500K ■ 3000K

Ceiling plate for pendant lamps  
**Does not contain pendant lamps**

HANGING ACCESSORIES

**Black**

SKU: 5181 3800156651814




HANGING ACCESSORIES

**White**

SKU: 5180 3800156651807



- 3  
Years  
Warranty
- NON-Dimmable
- EPISTAR  
Chips
- 120°
- IP20



LED Ceiling Light 38W **PF>0.95**  
**Sandy White - Square**



Product code	DL38-A1	CRI	Ra>80
Watts	38W	IP Rating	IP20
Input Voltage	AC : 175-240V	Dimension	450x450x100 mm
Flux	1900lm	Body Color	Sandy White
Beam Angle	120°	Dimmable	NO
Shape	Square		

SKU: 2297 Warm White 3000K




Remote Control included



- Dimmable
- IP20



LED Ceiling Light 60W  
**HOME EDITION - Allstar**



Product code	DL60-A6	Remote	Yes
Watts	60W	CRI	Ra>80
Input Voltage	AC : 185-240V	IP Rating	IP20
Flux	4200lm	Dimension	Φ485x115 mm
Beam Angle	120°	Body Color	Matt White
Shape	Round	Dimmable	Yes



SKU: 2889





LED SURFACE CEILING

**Bulkhead-Thermoplastic**



**8W**



640 Lumens

Product code	DL8-A3	Beam Angle	120°
Watts	8W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	640lm	Instant Start	<0.5s

SKU:2807 4500K    SKU: 2808 2700K

**13W**



1050 Lumens

Product code	DL13-A1	Beam Angle	120°
Watts	13W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	1050lm	Instant Start	<0.5s

SKU:2813 4500K    SKU: 2814 2700K

**8W**



640 Lumens

Product code	DL8-A4	Beam Angle	120°
Watts	8W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	640lm	Instant Start	<0.5s



MW Sensor

SKU:2809 4500K    SKU: 2810 2700K

**13W**



1050 Lumens

Product code	DL13-A3	Beam Angle	120°
Watts	13W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	1050lm	Instant Start	<0.5s



MW Sensor

SKU:2815 4500K    SKU: 2816 2700K

**8W**



640 Lumens

Product code	DL8-A5	Beam Angle	120°
Watts	8W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	640lm	Instant Start	<0.5s



Emergency

SKU:2811 4500K    SKU: 2812 2700K

**13W**



1050 Lumens

Product code	DL13-A4	Beam Angle	120°
Watts	13W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	1050lm	Instant Start	<0.5s



Emergency

SKU:2817 4500K    SKU: 2818 2700K

LED SURFACE CEILING 8W

**Bulkhead-Thermoplastic**

SKU: 2801 6000K    SKU:2802 4000K    SKU: 2803 2700K

Watts	8W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	600lm	Dimension	160x90x51 mm
Beam Angle	120°	Body Color	White
Shape	Bulkhead	Dimmable	NO



Sensor




1260 Lumens



120°



IP20



LED SURFACE CEILING 18W

**Thermoplastic - PIR**

SKU: 2804 6000K    SKU:2805 4000K    SKU: 2806 2700K

Watts	18W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	1260lm	Dimension	ø295x70 mm
Beam Angle	120°	Body Color	White
Shape	Round	Dimmable	NO



## LED CEILING LIGHTS

**HOME EDITION - Matt White**

120°




IP20

**12W****880**

Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	880lm	Body Color	White



SKU: 2870   SKU:2871   SKU: 2872  
 6000K   4500K   3000K

## LED CEILING LIGHTS

**HOME EDITION - Dotty Sparkle**

120°




IP20

**12W****880**

Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	880lm	Body Color	White




SKU: 2879   SKU:2880   SKU: 2881  
 6000K   4500K   3000K

**18W****1550**

Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1550lm	Body Color	White




SKU: 2873   SKU:2874   SKU: 2875  
 6000K   4500K   3000K

**18W****1550**

Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1550lm	Body Color	White




SKU:2883   SKU: 2884  
 4500K   3000K

**24W****1900**

Lumens

Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1900lm	Body Color	White




SKU: 2876   SKU:2877   SKU: 2878  
 6000K   4500K   3000K

**24W****1900**

Lumens

Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1900lm	Body Color	White



SKU: 2887  
 3000K





## LED CEILING LIGHTS

**CITY LINE - Matt White**

120°




IP20

**12W****880**

Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	880lm	Body Color	White



SKU: 2840	SKU:2841	SKU: 2842
6000K	4500K	3000K



## LED CEILING LIGHTS

**CITY LINE - Dotty Sparkle**

120°




IP20

**12W****840**

Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	840lm	Body Color	White




SKU: 2849	SKU:2850	SKU: 2851
6000K	4500K	3000K

**18W****1550**

Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1550lm	Body Color	White




SKU: 2843	SKU:2844	SKU: 2845
6000K	4500K	3000K

**18W****1260**

Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1260lm	Body Color	White




SKU: 2852	SKU:2853	SKU: 2854
6000K	4500K	3000K

**24W****1900**

Lumens

Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1900lm	Body Color	White




SKU: 2846	SKU:2847	SKU: 2848
6000K	4500K	3000K

**24W****1900**

Lumens

Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	1900lm	Body Color	White




SKU: 2855	SKU:2856	SKU: 2857
6000K	4500K	3000K



Remote Control included



Color changing LED 3000 to 6000K

**LED Ceiling Light 36W PF>0.9**  
**Matt White**
  
**2500**  
 Lumens


SKU: 2858 3800156628588


Product code	DL36-A4	Remote	No
Watts	36W	CRI	Ra>80
Input Voltage	AC : 185-265V	IP Rating	IP20
Flux	2500lm	Dimension	ø460x70 mm
Beam Angle	120°	Body Color	Matt White
Shape	Round	Dimmable	Yes



Remote Control included



Color changing LED 3000 to 6000K

**LED Ceiling Light 36W PF>0.9**  
**Matt White+Dotty Sparkle**
  
**2500**  
 Lumens


SKU: 2860 3800156628601


Product code	DL36-A5	Remote	Yes
Watts	36W	CRI	Ra>80
Input Voltage	AC : 185-265V	IP Rating	IP20
Flux	2500lm	Dimension	430x430x70 mm
Beam Angle	120°	Body Color	Matt White
Shape	Square	Dimmable	Yes



Remote Control included



Color changing LED 3000 to 6000K

**LED Ceiling Light 60W PF>0.9**  
**Matt White**
  
**3600**  
 Lumens


SKU: 2859 3800156628595


Product code	DL60-A4	Remote	No
Watts	60W	CRI	Ra>80
Input Voltage	AC : 185-265V	IP Rating	IP20
Flux	3600lm	Dimension	ø560x70 mm
Beam Angle	120°	Body Color	Matt White
Shape	Round	Dimmable	Yes



Remote Control included



Color changing LED 3000 to 6000K

**LED Ceiling Light 60W PF>0.9**  
**Matt White+Dotty Sparkle**
  
**3600**  
 Lumens


SKU: 2861 3800156628618

Product code	DL60-A5	Remote	Yes
Watts	60W	CRI	Ra>80
Input Voltage	AC : 185-265V	IP Rating	IP20
Flux	3600lm	Dimension	530x530x70 mm
Beam Angle	120°	Body Color	Matt White
Shape	Square	Dimmable	Yes

## LED Suspended Lighting

**Round Sandy White**

## LED Suspended Lighting

**Square Sandy White**

## LED Suspended Lighting

**38W PF>0.95**2660  
Lumens

Watts	38W	CRI	Ra>80
Input Voltage	AC : 175-240V	IP Rating	IP20
Flux	2660lm	Dimension	ø450x1200 mm
Beam Angle	120°	Body Color	Sandy White
Shape	Round	Dimmable	NO

SKU: 9036 Warm White 3000K

## LED Suspended Lighting

**38W PF>0.95**2660  
Lumens

Watts	38W	CRI	Ra>80
Input Voltage	AC : 175-240V	IP Rating	IP20
Flux	2660lm	Dimension	450x450x1200 mm
Beam Angle	120°	Body Color	Sandy White
Shape	Square	Dimmable	NO

SKU: 9038 Warm White 3000K

## LED Suspended Lighting

**50W PF>0.95**3500  
Lumens

Watts	50W	CRI	Ra>80
Input Voltage	AC : 175-240V	IP Rating	IP20
Flux	3500lm	Dimension	ø600x1200 mm
Beam Angle	120°	Body Color	Sandy White
Shape	Round	Dimmable	NO

SKU: 9037 Warm White 3000K

## LED Suspended Lighting

**50W PF>0.95**3500  
Lumens

Watts	50W	CRI	Ra>80
Input Voltage	AC : 175-240V	IP Rating	IP20
Flux	3500lm	Dimension	600x600x1200 mm
Beam Angle	120°	Body Color	Sandy White
Shape	Square	Dimmable	NO

SKU: 9039 Warm White 3000K

VINTAGE PENDANTS E27



SKU: 9029 - Pearl Black



SKU: 9046 - Pearl Black



SKU: 9047 - Bronze



SKU: 9049 - Antique gold



SKU: 9028 - Rose Gold



SKU: 9048 - Rose Gold



SKU: **9027**  
Product Code PD1-A2  
E27 holder Max 60W  
IP Rating IP20  
Dimension ø90x1500mm



E27 Holder



IP20

3D Glass Barel Pendant D200  
**Chrome Rhombus**



SKU: **9014**  
Product Code PD1-A1  
E27 holder Max 40W  
Material 3D Glass  
IP Rating IP20  
Dimension ø200x213mm  
EAN: 3800156690141



E27 Holder



IP20

3D Glass Barel Pendant D200  
**Chrome Squares**



SKU: **9015**  
Product Code PD1-A1  
E27 holder Max 40W  
Material 3D Glass  
IP Rating IP20  
Dimension ø200x213mm  
EAN: 3800156690158



E27 Holder



IP20

3D Glass Pendant D200  
**Chrome Square**



SKU: **9004**  
Product Code PD1-A1  
E27 holder Max 40W  
Material 3D Glass  
IP Rating IP20  
Dimension ø200x175mm  
EAN: 3800156690042



E27 Holder



IP20


**3D Glass Pendant D200**  
**Chrome Circles**

SKU: **9019**  
 Product Code PD1-A1  
 E27 holder Max 40W  
 Material 3D Glass  
 IP Rating IP20  
 Dimension ø200x165mm  
 EAN: 3800156690196



E27 Holder



IP20


**3D Glass Pendant D290**  
**Copper Circles**

SKU: **9022**  
 Product Code PD1-A1  
 E27 holder Max 40W  
 Material 3D Glass  
 IP Rating IP20  
 Dimension ø290x250mm  
 EAN: 3800156690226



E27 Holder



IP20


**3D Glass Pendant D200**  
**Chrome Seagull**

SKU: **9020**  
 Product Code PD1-A1  
 E27 holder Max 40W  
 Material 3D Glass  
 IP Rating IP20  
 Dimension ø200x165mm  
 EAN: 3800156690202



E27 Holder



IP20


**3D Glass Pendant D290**  
**Chrome Seagull**

SKU: **9024**  
 Product Code PD1-A1  
 E27 holder Max 40W  
 Material 3D Glass  
 IP Rating IP20  
 Dimension ø290x250mm  
 EAN: 3800156690240



E27 Holder



IP20


**3D Glass Pendant D200**  
**Copper Circles**

SKU: **9021**  
 Product Code PD1-A1  
 E27 holder Max 40W  
 Material 3D Glass  
 IP Rating IP20  
 Dimension ø200x165mm  
 EAN: 3800156690219



E27 Holder



IP20


**3D Glass Umbrella Pendant D400**  
**Chrome Circles**

SKU: **9018**  
 Product Code PD1-A1  
 E27 holder Max 40W  
 Material 3D Glass  
 IP Rating IP20  
 Dimension ø400x200mm  
 EAN: 3800156690189



E27 Holder



IP20


**LED Flame Bulb**  
**5W SMD E27**


Product code	OT5-A1	CRI	Ra>80
Watts	5W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	ø47x125 mm
Flux	250lm	Socket	E27
Beam Angle	360°		

SKU: 222  
 ■ 1300K


**LED Flame Lamp Wall Mounted**  
**5W SMD**


Product code	PD5-A1	CRI	Ra>80
Watts	5W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	220xH285 mm
Flux	250lm	Beam Angle	360°
Beam Angle	360°	E27 holder	LED Flame Bulb Included

SKU: 9044  
 ■ 1300K


**LED Flame Lamp**  
**5W SMD**


Product code	PD5-A1	CRI	Ra>80
Watts	5W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	ø180xH285 mm
Flux	250lm	E27 holder	LED Flame Bulb Included
Beam Angle	360°		

SKU: 9041  
 ■ 1300K


**LED Flame Lamp Wall Mounted**  
**5W SMD**


Product code	PD5-A1	CRI	Ra>80
Watts	5W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	180xH260 mm
Flux	250lm	E27 holder	LED Flame Bulb Included
Beam Angle	360°		

SKU: 9045  
 ■ 1300K


**LED Flame Lamp With Battery**  
**5W SMD**


Product code	PD5-A1	CRI	Ra>80
Watts	5W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	ø180xH285 mm
Flux	250lm	E27 holder	LED Flame Bulb Included
Beam Angle	360°		

SKU: 9042  
 ■ 1300K


**LED Flame Lamp Hanging**  
**5W SMD**


Product code	PD5-A1	CRI	Ra>80
Watts	5W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	ø150xH330 mm
Flux	250lm	E27 holder	LED Flame Bulb Included
Beam Angle	360°		

SKU: 9043  
 ■ 1300K

**NEW**



**Portable Retro LED Lamp  
2.6W Filament**

110 Lumens Dimmable IP44

Watts 2.6W  
Working Voltage 3.7V  
Flux 8-110lm  
Beam Angle 270°  
CRI Ra>80  
IP Rating IP44  
Dimension 115x115x115 mm  
Working Time 3.5-7.5 Hours

SKU: 249  
CCT Steps  
6000K 4500K 3000K

Battery 950mAh

**NEW**



**Portable Retro LED Lamp  
3W Filament**

160 Lumens Dimmable IP44

Watts 2.6W  
Working Voltage 3.7V  
Flux 20-160lm  
Beam Angle 270°  
CRI Ra>80  
IP Rating IP44  
Dimension 110x110x180 mm  
Working Time 2.5-7.5 Hours

SKU: 250  
CCT Steps  
6000K 4500K 3000K

Battery 650mAh



**NEW**



**Rechargeable Table Lamp  
2.5W Solar  
USB-C Charging Cable**

280 Lumens Solar Power Battery 4400mAh IP54

CCT Steps  
6000K 4500K 2700K

Watts 2.5W  
Working Voltage 3.7V  
Flux 280lm

IP Rating IP54  
Dimension Ø128x300mm  
Working Time 6.5 Hours

SKU: 251 Black  
SKU: 252 White  
SKU: 253 Beige

**NEW**



**Rechargeable Table Lamp  
USB-C Charging Cable**

280 Lumens Battery 4400mAh IP54

CCT Steps  
6000K 4500K 2700K

Watts 2.5W  
Working Voltage 3.7V  
Flux 280lm

IP Rating IP54  
Dimension Ø1104x315mm  
Working Time 6.5 Hours

SKU: 254 Black  
SKU: 255 White  
SKU: 256 Beige



LED panels offers a broad application it different lighting solutions. With variety of standard sizes they can be placed in suspended ceilings or used as hanging lights.

**Features:**

- Up to 80% power saving
- Build-in or hanging installations
- Variety of colour temperatures
- Glossy or matt finishing
- Standard sizes
- Variety of powers

**Application:**

- Suspended ceilings
- Indoor use – home or office
- Large spaces







 LED PANEL DRIVER 36W FOR  
 2701-2719  
 SKU: 6043

**LED PANEL PF>0.95**  
**25W With Driver 60x60cm**

Product code	DL25-A2	Beam Angle	120°
Watts	25W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3000lm	BOX Qty	1 PCS


**TP(b)RATED**  
 Polycarbonate Diffuser

 SKU: 2740    SKU:2741  
 6000K    4500K

**3**  
 Years  
 Warranty


160 Lumens/W

**LED BACKLIT PANEL PF>0.9**  
**25W With Driver 60x60cm**


Product code	DL25-A3	Beam Angle	120°
Watts	25W	CRI	Ra>80
Input Voltage	AC : 185-265V	IP Rating	IP20
Flux	4000lm	BOX Qty	10 PCS

 SKU: 2770    SKU:2771  
 6000K    4500K

 LED DIMMABLE DRIVER 36W  
 FOR 2701-2719  
 SKU: 6044


**LED BACKLIT PANEL PF>0.9**  
**30W With Driver 60x60cm**

Product code	DL30-A3	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	6 PCS


**TP(a)RATED**  
 Polycarbonate Diffuser

 SKU: 2776    SKU:2777  
 6000K    4500K

**NEW**
**LED BACKLIT PANEL PF>0.9**  
**36W With Driver 60x60cm**


Product code	DL36-A7	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	4320lm	BOX Qty	10 PCS

 SKU: 12771    SKU:12772    SKU: 12773  
 6000K    4000K    2700K
**NEW**
**LED BACKLIT PANEL PF>0.9**  
**36W With Driver 120x30cm**

Product code	DL36-A7	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	4320lm	BOX Qty	10 PCS


 SKU: 12774    SKU:12775    SKU: 12776  
 6000K    4000K    2700K
**NEW**
**LED BACKLIT PANEL PF>0.9**  
**36W With Driver 60x60cm**

Product code	DL36-A7	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	4320lm	BOX Qty	10 PCS


 SKU: 12777    SKU:12778  
 6000K    4000K


**LED PANEL Single Pack PF>0.9**  
**36W With Driver 62x62cm**
  
 3600 Lumens
 
  
 IP20



Product code	DL36-A4	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	1 PCS


 SKU: 2701    SKU:2702    SKU: 2703  
 6000K    4500K    2700K

**LED PANEL PF>0.9**  
**36W With Driver 60x60cm**
  
 3600 Lumens
 
  
 IP20



Product code	DL36-A1	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	6 PCS

 SKU: 2711    SKU:2712    SKU: 2713  
 6000K    4500K    2700K

**LED PANEL Single Pack PF>0.9**  
**36W With Driver 62x62cm**
  
 3600 Lumens
 
  
 IP20



Product code	DL36-A4	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	1 PCS


 SKU: 2704    SKU:2705    SKU: 2706  
 6000K    4500K    2700K

**LED PANEL PF>0.9**  
**36W With Driver 60x60cm**
  
 3600 Lumens
 
  
 IP20


Product code	DL36-A1	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	6 PCS


 SKU: 2717    SKU:2718  
 6000K    4500K

**LED PANEL Single Pack PF>0.9**  
**36W With Driver 62x62cm**
  
 3600 Lumens
 
  
 IP20


Product code	DL36-A4	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	1 PCS


 SKU: 2707    SKU:2708  
 6000K    4500K

**LED PANEL PF>0.95**  
**36W With Driver 60x60cm**
  
 3500 Lumens
 
  
 IP20



Product code	DL36-A2	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3500lm	BOX Qty	1 PCS

**TP(b)RATED**  
 Polycarbonate Diffuser

 SKU: 2744  
 6000K

**3** Years  
 Warranty


**LED PANEL PF>0.9**  
**36W With Driver 62x62cm**
**3600**  
 Lumens
 
 IP20


Product code	DL36-A3	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3600lm	BOX Qty	1 PCS

 SKU: 2734 6000K  
 SKU: 2736 2700K


 6 PCS  
 BOX

**LED PANEL PF>0.9**  
**36W With Driver 62x62cm**
**3060**  
 Lumens
 
 IP20


Product code	DL36-A3	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3060lm	BOX Qty	6 PCS

 SKU: 2737 6000K  
 SKU: 2739 2700K

**120**  
 Lumens/W

**5**  
 Years  
 Warranty


**LED PANEL PF>0.9**  
**40W With Driver 60x60cm**
**4800**  
 Lumens
 
 IP20

Product code	DL40-A1	Beam Angle	120°
Watts	40W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	4800lm	BOX Qty	1 PCS


 SKU: 2726 6000K  
 SKU: 2727 4500K  
 SKU: 2728 2700K


**LED PANEL PF>0.9**  
**45W With Driver 60x60cm**



Product code	DL45-A5	Beam Angle	120°
Watts	45W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3600lm	BOX Qty	6 PCS


 SKU: 2396  
 ■ 2700K

**LED PANEL PF>0.9**  
**45W With Driver 62x62cm**



Product code	DL45-A5	Beam Angle	120°
Watts	45W	CRI	Ra>95
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3600lm	BOX Qty	6 PCS

 SKU: 2797   SKU:2798   SKU: 2799  
 ■ 6000K   ■ 4500K   ■ 2700K

**LED PANEL PF>0.9**  
**45W With Driver 60x60cm**



Product code	DL45-A5	Beam Angle	120°
Watts	45W	CRI	Ra>95
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3600lm	BOX Qty	6 PCS

 SKU: 2399  
 ■ 2700K

**LED PANEL Single Pack PF>0.9**  
**45W With Driver 62x62cm**



Product code	DL45-A4	Beam Angle	120°
Watts	45W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	1 PCS


 SKU: 2791   SKU:2792   SKU: 2793  
 ■ 6000K   ■ 4500K   ■ 2700K

**LED PANEL Single Pack PF>0.9**  
**45W With Driver 62x62cm**


Product code	DL45-A5	Beam Angle	120°
Watts	45W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3600lm	BOX Qty	1 PCS


 SKU: 2788   SKU:2789   SKU: 2790  
 ■ 6000K   ■ 4500K   ■ 2700K

**LED PANEL PF>0.9**  
**45W With Driver 62x62cm**

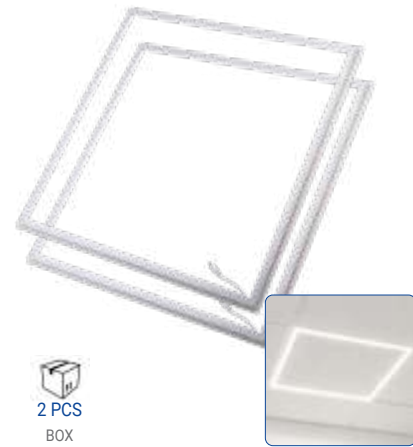
Product code	DL45-A4	Beam Angle	120°
Watts	45W	CRI	Ra>80
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3600lm	BOX Qty	6 PCS

 SKU:2795   SKU: 2796  
 ■ 4500K   ■ 2700K




**LED FRAME PANEL PF>0.9**  
**36W With Driver 60x60cm**


Product code	DL36-A4	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	2 PCS

 SKU: 2746  
 ■ 6000K

 2 PCS  
 BOX


**LED PANEL PF>0.9**  
**36W With Driver 60x60cm**


Product code	DL36-A1	Beam Angle	120°
Watts	36W	CRI	Ra>95
Input Voltage	AC : 175-265V	IP Rating	IP20
Flux	3600lm	BOX Qty	6 PCS

 SKU: 2729    SKU:2730  
 ■ 6000K    ■ 4500K

 6 PCS  
 BOX


**LED PANEL CLOUD OPTIC**  
**45W With Driver 60x60cm**


Product code	DL45-A3	Beam Angle	120°
Watts	45W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	4 PCS

 SKU: 2780  
 ■ 6000K

 4 PCS  
 BOX


**LED SURFACE/BACKLIT PANEL**  
**40W With Driver 60x60cm**


Product code	DL40-A3	Beam Angle	120°
Watts	40W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	10 PCS

 SKU: 2784    SKU:2785  
 ■ 6000K    ■ 4000K

 4 PCS  
 BOX


**LED BACKLIT PANEL PF>0.9**  
**40W With Driver 60x60cm**


Product code	DL40-A3	Beam Angle	120°
Watts	40W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3400lm	BOX Qty	10 PCS

 SKU: 2772    SKU:2773  
 ■ 6000K    ■ 4500K

 10 PCS  
 BOX


**LED SURFACE/BACKLIT PANEL**  
**40W With Driver 120x30cm**


Product code	DL40-A3	Beam Angle	120°
Watts	40W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	10 PCS

 SKU: 2786    SKU:2787  
 ■ 6000K    ■ 4500K

 4 PCS  
 BOX



**LED PANEL PF>0.9**  
**36W With Driver 120x30cm**
**3600**  
 Lumens


Product code	DL36-A1	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	6 PCS


**6 PCS BOX**  
 SKU: 2714    SKU: 2715    SKU: 2716  
 6000K    4500K    2700K

**LED SLIM PANEL Single Pack PF>0.9**  
**36W With Driver 120x30cm**
**3600**  
 Lumens



Product code	DL36-A1	Beam Angle	120°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	3600lm	BOX Qty	1 PCS


 SKU: 2731    SKU: 2732    SKU: 2733  
 6000K    4500K    2700K

**LED PANEL PF>0.9**  
**45W With Driver 120x30cm**
**4500**  
 Lumens



Product code	DL45-A1	Beam Angle	120°
Watts	45W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	4500lm	BOX Qty	1 and 6 PCS

**1 PCS BOX**  
 SKU: 2385    SKU: 2386    SKU: 2387  
 6000K    4500K    2700K


**6 PCS BOX**  
 SKU: 2375    SKU: 2376    SKU: 2377  
 6000K    4500K    2700K

**DRIVERS FOR LED PANELS**
**Dimmable**


SKU: 6031	600mA	30-42V	25W
SKU: 6032	900mA	30-42V	36W
SKU: 6028	1000mA	30-45V	45W

Watts	25W	36W	45W
Input Voltage	AC: 180-265V	AC: 180-265V	AC: 180-265V
Output Voltage	DC: 30-42V	DC: 30-42V	DC: 30-45V
Material	Plastic	Plastic	Plastic
IP Rating	IP20	IP20	IP20
Product code	AC1-A7	AC1-A8	AC1-A6


**EMERGENCY BATTERY PACK FOR LED PANELS**

**LED DALI DRIVER - Adjustable FOR LED PANELS**


Product code	AC1-A9
Battery	3.6V / 4.5Ah
Material	Plastic
Dimension	213x95x40mm
Emergency duration	3 Hours
Dimensional	213x95x45mm

SKU: 6029 Battery Pack



Watts	20-40W
Input Voltage	AC: 220-240V
Output Current	550mA-1050mA
Output Voltage	25V-42V
Material	Plastic
Dimensional	106x70x45mm

Emergency duration 3 Hours

SKU: 6030 20W-40W




## DRIVERS FOR LED PANELS


**Plastic Case**

SKU: 6019	900mA	36W
SKU: 6021	950mA	45W
SKU: 6022	750mA	48W

Watts	36W	45W	48W	48W
Input Voltage	AC: 175-240V	AC: 175-240V	AC: 175-240V	AC: 175-240V
Output Current	900mA	950mA	1150mA	1150mA
Material	Plastic	Plastic	Plastic	Plastic
IP Rating	IP20	IP20	IP20	IP20



## Accessories for Hanging

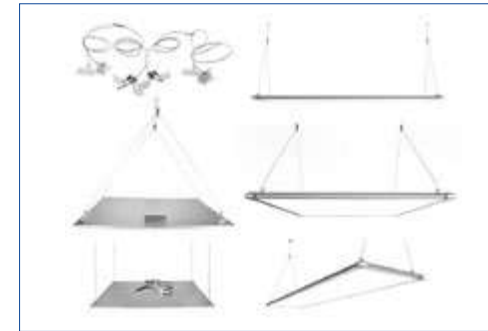**Stainless Steel Rope**

SKU: 5182

**Clips for LED Panels**

SKU: 5188




## DRIVERS FOR LED DOWNLIGHTS

**Plastic Case**

SKU: 6035	3-12V	3W
SKU: 6036	15-24V	6W
SKU: 6037	20-40V	12W
SKU: 6038	40-60V	18W
SKU: 6039	60-80V	24W

Watts	3W	6W	12W	18W	24W
Input Voltage	AC: 85-265V	AC: 85-265V	AC: 85-265V	AC: 85-265V	AC: 85-265V
Output Voltage	DC: 3-12V	DC: 15-24V	DC: 20-40V	DC: 40-60V	DC: 60-80V
Material	Plastic	Plastic	Plastic	Plastic	Plastic
IP Rating	IP20	IP20	IP20	IP20	IP20



## FRAMES FOR LED PANELS

<b>NEW</b> SKU: 5199	Dimension	625x625mm
SKU: 5198	Dimension	600x600mm
SKU: 5197	Dimension	300x1200mm





These LED mini panel lights are suitable for recessed installation in offices, hospitals, schools. Easy and quick mounting, there is no need of maintenance, offering long lifetime up of 25 000h

**Features:**

- Up to 80% power saving
- Different sizes to fit old installations or new lighting projects
- Build-in

**Application:**

- Home or office use
- Accent lights for shops or stores








180°

NON-Dimmable

IP54

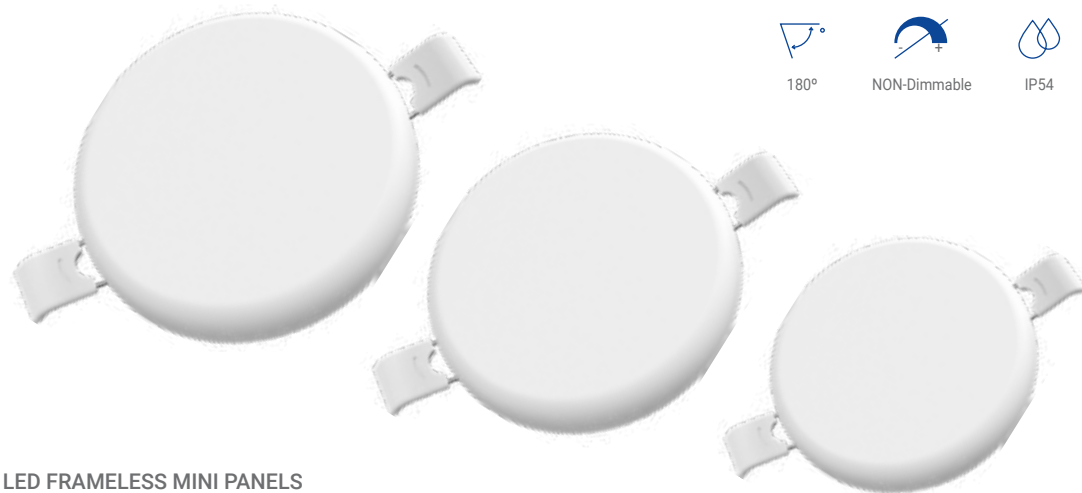


## LED FRAMELESS MINI PANELS


## ROUND

**18W**1500  
Lumens


Product code	DL18-B2	Beam Angle	180°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP54
Flux	1500lm	Cutting Size	ø108mm


 SKU: 2669  
 6000K
**24W**2010  
Lumens

Product code	DL24-B2	Beam Angle	180°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP54
Flux	2010lm	Cutting Size	ø155mm


 SKU: 2672   SKU: 2673   SKU: 2674  
 6000K   4500K   2700K
**36W**3020  
Lumens


Product code	DL36-B3	Beam Angle	180°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP54
Flux	3020lm	Cutting Size	ø206mm


 SKU: 2675   SKU: 2676   SKU: 2677  
 6000K   4500K   2700K


180°

NON-Dimmable

IP54

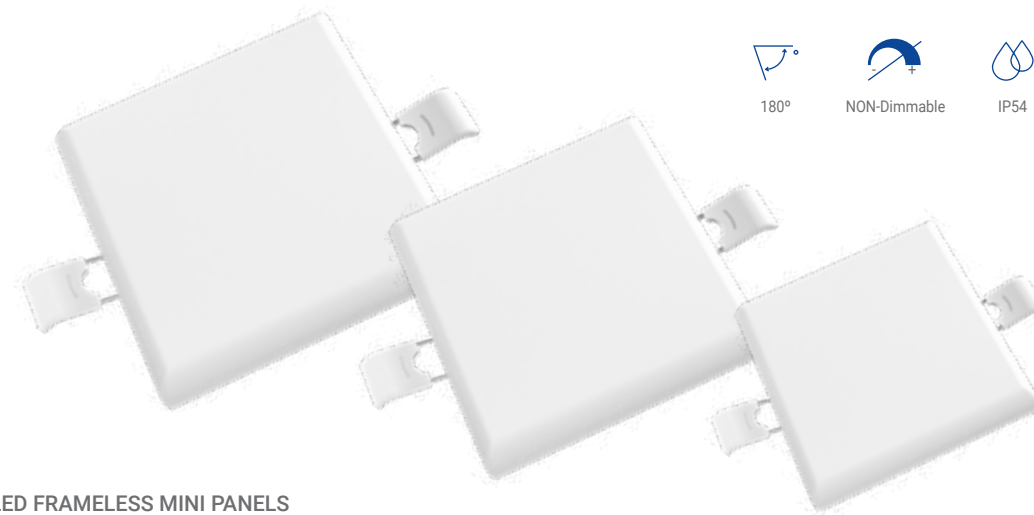


## LED FRAMELESS MINI PANELS

## SQUARE


**18W**1500  
Lumens

Product code	DL18-B2	Beam Angle	180°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP54
Flux	1500lm	Cutting Size	108x108mm


 SKU: 2681  
 6000K


 SKU: 2683  
 2700K
**24W**2010  
Lumens

Product code	DL24-B2	Beam Angle	180°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP54
Flux	2010lm	Cutting Size	155x155mm


 SKU: 2684  
 6000K

 SKU: 2686  
 2700K
**36W**3020  
Lumens


Product code	DL36-B3	Beam Angle	180°
Watts	36W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP54
Flux	3020lm	Cutting Size	206x206mm


 SKU: 2687   SKU: 2688   SKU: 2689  
 6000K   4500K   2700K


**LED MINI PANELS**  
**ROUND - Pro Line**  
**TRUE COLOURS SERIES**
**6W****440**


Lumens

Product code	DL6-B3	Beam Angle	120°
Watts	6W	CRI	Ra>95
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	440lm	Cutting Size	ø100mm


 SKU: 2601  
 ■ 6000K
**12W****1000**


Lumens

Product code	DL12-B3	Beam Angle	120°
Watts	12W	CRI	Ra>95
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	1000lm	Cutting Size	ø150mm


 SKU: 2604  
 ■ 6000K
**18W****1500**


Lumens

Product code	DL18-B3	Beam Angle	120°
Watts	18W	CRI	Ra>95
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	1500lm	Cutting Size	ø200mm


 SKU: 2608    SKU: 2610  
 ■ 6000K    ■ 2700K
**24W****2010**

Lumens


Product code	DL24-B3	Beam Angle	120°
Watts	24W	CRI	Ra>95
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	2010lm	Cutting Size	ø270mm


 SKU: 2613  
 ■ 2700K

**LED MINI PANELS**  
**SQUARE - Pro Line**  
**TRUE COLOURS SERIES**
**6W****440**


Lumens

Product code	DL6-B3	Beam Angle	120°
Watts	6W	CRI	Ra>95
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	440lm	Cutting Size	95x95mm


 SKU: 2614  
 ■ 6000K
**12W****1000**


Lumens

Product code	DL12-B3	Beam Angle	120°
Watts	12W	CRI	Ra>95
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	1000lm	Cutting Size	150x150mm


 SKU: 2617  
 ■ 6000K
**18W****1500**


Lumens

Product code	DL18-B3	Beam Angle	120°
Watts	18W	CRI	Ra>95
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	1500lm	Cutting Size	200x200mm


 SKU: 2630    SKU: 2631    SKU: 2632  
 ■ 6000K    ■ 4500K    ■ 2700K
**24W****2010**

Lumens

Product code	DL24-B3	Beam Angle	120°
Watts	24W	CRI	Ra>95
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	2010lm	Cutting Size	270x270mm


 SKU: 2642  
 ■ 6000K

**NEW**

120°



NON-Dimmable



IP20




## LED BACKLIT MINI PANELS

**ROUND - Driver-on-board****Home Edition****6W****360**

Lumens

Product code	DL6-B1	Beam Angle	120°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	360lm	Cutting Size	ø100mm




SKU: 2951	SKU: 2952	SKU: 2953
6000K	4500K	2700K

**6W****360**

Lumens

Product code	DL6-B1	Beam Angle	120°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	360lm	Cutting Size	100x100mm




SKU: 2963	SKU: 2964	SKU: 2965
6000K	4500K	2700K

**12W****840**

Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	840lm	Cutting Size	ø150mm




SKU: 2954	SKU: 2955	SKU: 2956
6000K	4500K	2700K

**12W****840**

Lumens

Product code	DL12-B1	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	840lm	Cutting Size	150x150mm




SKU: 2966	SKU: 2967	SKU: 2968
6000K	4500K	2700K

**18W****1350**

Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	1350lm	Cutting Size	ø200mm




SKU: 2957	SKU: 2958	SKU: 2959
6000K	4500K	2700K

**18W****1350**

Lumens

Product code	DL18-B1	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	1350lm	Cutting Size	205x205mm




SKU: 2969	SKU: 2970	SKU: 2971
6000K	4500K	2700K

**24W****1920**

Lumens

Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	1920lm	Cutting Size	ø270mm




SKU: 2960	SKU: 2961	SKU: 2962
6000K	4500K	2700K

**24W****1920**

Lumens

Product code	DL24-B1	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 85-265V	IP Rating	IP20
Flux	1920lm	Cutting Size	270x270mm




SKU: 2972	SKU: 2973	SKU: 2974
6000K	4500K	2700K



LED MINI PANELS


**ROUND - Home Edition**

<b>3W</b> 150 Lumens	Product code	DL3-B1	Beam Angle	120°
	Watts	3W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	150lm	Cutting Size	ø62mm




SKU: 2470	SKU: 2471	SKU: 2472
6000K	4500K	2800K

<b>6W</b> 360 Lumens	Product code	DL6-B1	Beam Angle	120°
	Watts	6W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	360lm	Cutting Size	ø99mm




SKU: 2473	SKU: 2474	SKU: 2475
6000K	4500K	2800K

<b>12W</b> 840 Lumens	Product code	DL12-B1	Beam Angle	120°
	Watts	12W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	840lm	Cutting Size	ø146mm




SKU: 2476	SKU: 2477	SKU: 2478
6000K	4500K	2800K

<b>18W</b> 1350 Lumens	Product code	DL18-B1	Beam Angle	120°
	Watts	18W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	1350lm	Cutting Size	ø196mm



SKU: 2479	SKU: 2480	SKU: 2481
6000K	4500K	2800K

<b>24W</b> 1700 Lumens	Product code	DL24-B1	Beam Angle	120°
	Watts	24W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	1700lm	Cutting Size	ø276mm




SKU: 2482	SKU: 2483	SKU: 2484
6000K	4500K	2800K



LED MINI PANELS


**SQUARE - Home Edition**

<b>3W</b> 150 Lumens	Product code	DL3-B1	Beam Angle	120°
	Watts	3W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	150lm	Cutting Size	67x67mm




SKU: 2485	SKU: 2486	SKU: 2487
6000K	4500K	2800K

<b>6W</b> 360 Lumens	Product code	DL6-B1	Beam Angle	120°
	Watts	6W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	360lm	Cutting Size	98x98mm




SKU: 2488	SKU: 2489	SKU: 2490
6000K	4500K	2800K

<b>12W</b> 840 Lumens	Product code	DL12-B1	Beam Angle	120°
	Watts	12W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	840lm	Cutting Size	148x148mm




SKU: 2491	SKU: 2492	SKU: 2493
6000K	4500K	2800K

<b>18W</b> 1350 Lumens	Product code	DL18-B1	Beam Angle	120°
	Watts	18W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	1350lm	Cutting Size	198x198mm



SKU: 2494	SKU: 2496	SKU: 2495
6000K	4500K	2800K

<b>24W</b> 1700 Lumens	Product code	DL24-B1	Beam Angle	120°
	Watts	24W	CRI	Ra>80
	Input Voltage	AC : 85-260V	IP Rating	IP20
	Flux	1700lm	Cutting Size	270x270mm



SKU: 2497	SKU: 2498	SKU: 2499
6000K	4500K	2800K



**3** Years  
Warranty

100°  
Beam Angle

IP44  
IP Rating



Color Changing Knob

**CCT - LED MINI PANELS**  
**ROUND Build-in Driver**


**6W**



**450**

Lumens

Product code	DL6-A6	Beam Angle	100°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 165-265V	IP Rating	IP44 Front
Flux	450lm	Cutting Size	ø105mm



SKU: 2590

CCT Steps

6000K 4500K 3000K



**3** Years  
Warranty

120°  
Beam Angle

IP44  
IP Rating



Color Changing Knob

**CCT - LED MINI PANELS**  
**SQUARE Build-in Driver**


**6W**



**450**

Lumens

Product code	DL6-A6	Beam Angle	100°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 165-265V	IP Rating	IP44 Front
Flux	450lm	Cutting Size	105x105mm



SKU: 2594

CCT Steps

6000K 4500K 3000K


**12W**



**950**

Lumens

Product code	DL12-A6	Beam Angle	100°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 165-265V	IP Rating	IP44 Front
Flux	950lm	Cutting Size	ø155mm



SKU: 2591

CCT Steps

6000K 4500K 3000K


**12W**



**950**

Lumens

Product code	DL12-A6	Beam Angle	100°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 165-265V	IP Rating	IP44 Front
Flux	950lm	Cutting Size	155x155mm



SKU: 2595

CCT Steps

6000K 4500K 3000K


**18W**



**1880**

Lumens

Product code	DL18-A6	Beam Angle	100°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 165-265V	IP Rating	IP44 Front
Flux	1880lm	Cutting Size	ø205mm



SKU: 2592

CCT Steps

6000K 4500K 3000K


**18W**



**1450**

Lumens

Product code	DL18-A6	Beam Angle	100°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 165-265V	IP Rating	IP44 Front
Flux	1450lm	Cutting Size	205x205mm



SKU: 2596

CCT Steps

6000K 4500K 3000K


**24W**



**2150**

Lumens

Product code	DL24-A6	Beam Angle	100°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 165-265V	IP Rating	IP44 Front
Flux	2150lm	Cutting Size	ø225mm



SKU: 2593

CCT Steps

6000K 4500K 3000K


**24W**



**2150**

Lumens

Product code	DL24-A6	Beam Angle	100°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 165-265V	IP Rating	IP44 Front
Flux	2150lm	Cutting Size	205x205mm



SKU: 2597

CCT Steps

6000K 4500K 3000K




## LED MINI PANELS


## ROUND

**3W**150  
Lumens


Product code	DL3-A4	Beam Angle	120°
Watts	3W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	150lm	Cutting Size	ø80mm


 SKU: 2431   SKU:2432   SKU: 2433  
 6000K   4500K   2700K
**6W**360  
Lumens


Product code	DL6-A4	Beam Angle	120°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	360lm	Cutting Size	ø110mm


 SKU: 2434   SKU:2435   SKU: 2436  
 6000K   4500K   2700K
**12W**840  
Lumens


Product code	DL12-A4	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	840lm	Cutting Size	ø155mm


 SKU: 2437   SKU:2438   SKU: 2439  
 6000K   4500K   2700K
**18W**1350  
Lumens

Product code	DL18-A4	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	1350lm	Cutting Size	ø205mm


 SKU: 2335   SKU:2440   SKU: 2336  
 6000K   4500K   2700K
**24W**1700  
Lumens

Product code	DL24-A4	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	1700lm	Cutting Size	ø285mm



 SKU: 2441   SKU:2442   SKU: 2443  
 6000K   4500K   2700K


## LED MINI PANELS


## SQUARE

**3W**150  
Lumens


Product code	DL3-A4	Beam Angle	120°
Watts	3W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	150lm	Cutting Size	75x75mm


 SKU: 2444   SKU:2445   SKU: 2446  
 6000K   4500K   2700K
**6W**360  
Lumens


Product code	DL6-A4	Beam Angle	120°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	360lm	Cutting Size	110x110mm


 SKU: 2447   SKU:2448   SKU: 2449  
 6000K   4500K   2700K
**12W**840  
Lumens


Product code	DL12-A4	Beam Angle	120°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	840lm	Cutting Size	155x155mm


 SKU: 2450   SKU:2451   SKU: 2452  
 6000K   4500K   2700K
**18W**1350  
Lumens

Product code	DL18-A4	Beam Angle	120°
Watts	18W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	1350lm	Cutting Size	205x205mm


 SKU: 2348   SKU:2453   SKU: 2349  
 6000K   4500K   2700K
**24W**1700  
Lumens

Product code	DL24-A4	Beam Angle	120°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 85-260V	IP Rating	IP20
Flux	1700lm	Cutting Size	282x282mm


 SKU: 2454   SKU:2455   SKU: 2456  
 6000K   4500K   2700K

3 Years  
Warranty

120°

Dimmable

IP44



Color Changing Knob




CCT - LED MINI PANELS

**ROUND Build-in Driver - Dimmable**

6W

450  
Lumens

Product code	DL6-A7	Beam Angle	100°
Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP44 Front
Flux	450lm	Cutting Size	ø105mm



SKU: 2581


CCT Steps

6000K 4500K 3000K

9W

650  
Lumens

Product code	DL9-A7	Beam Angle	100°
Watts	9W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP44 Front
Flux	650lm	Cutting Size	ø105mm



SKU: 2582


CCT Steps

6000K 4500K 3000K

12W

900  
Lumens

Product code	DL16-A7	Beam Angle	100°
Watts	12W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP44 Front
Flux	900lm	Cutting Size	ø155mm



SKU: 2583


CCT Steps

6000K 4500K 3000K

20W

1600  
Lumens

Product code	DL20-A7	Beam Angle	100°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP44 Front
Flux	1600lm	Cutting Size	ø205mm



SKU: 2584


CCT Steps

6000K 4500K 3000K

24W

2100  
Lumens

Product code	DL24-A7	Beam Angle	100°
Watts	24W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP44 Front
Flux	2100lm	Cutting Size	ø225mm



SKU: 2585

CCT Steps

6000K 4500K 3000K



Downlight Adapter

**ROUND Build-in Driver - Dimmable**

SKU: 5003

Surface 3'D105 from 6-9W  
Compatible with SKU: 2581, 2582

SKU: 5004

Surface 3'D105 from 12-16W  
Compatible with SKU: 2583

SKU: 5005

Surface 7'D205 from 18-20W  
Compatible with SKU: 2584

SKU: 5006

Surface 8'D225 from 22-24W  
Compatible with SKU: 2585

Mini Panels Dimmable Drivers



SKU: 6025

Dimmable Driver 220V 5-9\*1W 300mA

SKU: 6026

Dimmable Driver 220V 10-18\*1W 300mA

SKU: 6027

Dimmable Driver 220V 20-30\*1W 300mA



Slidable spring



Color Changing Knob


LED SLIM 5 in 1 BUILD-IN/SURFACE  
CCT LED 3000 to 6000K

3 Years Warranty  
100° Beam Angle  
IP20

18W

1600 Lumens

Product code DL18-A7  
Watts 18W  
Input Voltage AC : 175-265V  
Flux 1600lm  
Beam Angle 100°  
CRI Ra>80  
IP Rating IP20  
Cutting Size ø65-210mm




SKU: 2586  
CCT Steps  
6000K 4500K 3000K

30W

3000 Lumens

Product code DL30-A7  
Watts 30W  
Input Voltage AC : 175-265V  
Flux 3000lm  
Beam Angle 100°  
CRI Ra>80  
IP Rating IP20  
Cutting Size ø65-310mm



SKU: 2587  
CCT Steps  
6000K 4500K 3000K




LED CABINET LIGHT  
1W Round - Black Body

60 Lumens  
IP20

Watts 1W  
Input Voltage AC : 220-240V  
Flux 60lm  
Beam Angle 28°  
CRI Ra>80  
IP Rating IP20

SKU: 3296  
3000K




LED CABINET LIGHT  
1W Round - White Body

60 Lumens  
IP20

Watts 1W  
Input Voltage AC : 220-240V  
Flux 60lm  
Beam Angle 28°  
CRI Ra>80  
IP Rating IP20

SKU: 3297  
3000K




LED CABINET LIGHT  
1W Square - Black Body

60 Lumens  
IP20

Watts 1W  
Input Voltage AC : 220-240V  
Flux 60lm  
Beam Angle 28°  
CRI Ra>80  
IP Rating IP20

SKU: 3298  
3000K




LED CABINET LIGHT  
1W Square - White Body

60 Lumens  
IP20

Watts 1W  
Input Voltage AC : 220-240V  
Flux 60lm  
Beam Angle 28°  
CRI Ra>80  
IP Rating IP20

SKU: 3299  
3000K







## LED DOWNLIGHTS



LED downlights offer a wide variety of applications, from home use as additional lights, to main or accent lighting. Applicable in homes, offices and stores.

**Features:**

- Up to 80% power saving
- Different sizes to fit old installations or new lighting projects
- Variety of IP ratings
- Fixed or rotatable
- Fire-rated models
- Build-in or surface installation

**Application:**


- Home or office use
- Accent lights for shops or stores
- Suitable for suspended ceilings




**LED COB Downlight  
5W Adjustable**




Product code	CB5-A1	CRI	Ra>80
Watts	5W	IP Rating	IP20
Input Voltage	AC : 100-240V	Cutting Size	ø80
Flux	375lm	Body Color	White
Beam Angle	50°	Dimmable	NO

SKU: 3264   SKU:3265   SKU: 3266  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED COB Downlight  
5W Adjustable**



Product code	CB5-A1	CRI	Ra>80
Watts	5W	IP Rating	IP20
Input Voltage	AC : 100-240V	Cutting Size	ø80
Flux	375lm	Body Color	White
Beam Angle	50°	Dimmable	NO

SKU: 3267   SKU:3268   SKU: 3269  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED COB Downlight  
7W Adjustable**



Product code	CB7-A1	CRI	Ra>80
Watts	7W	IP Rating	IP20
Input Voltage	AC : 100-240V	Cutting Size	ø80
Flux	525lm	Body Color	White
Beam Angle	50°	Dimmable	NO

SKU: 3284   SKU:3285   SKU: 3286  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED COB Downlight  
7W Adjustable**



Product code	CB7-A1	CRI	Ra>80
Watts	7W	IP Rating	IP20
Input Voltage	AC : 100-240V	Cutting Size	ø80
Flux	525lm	Body Color	White
Beam Angle	50°	Dimmable	NO

SKU: 3287   SKU:3288   SKU: 3289  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED COB Downlight  
10W Adjustable**



Product code	CB10-A1	CRI	Ra>80
Watts	10W	IP Rating	IP20
Input Voltage	AC : 100-240V	Cutting Size	ø105
Flux	750lm	Body Color	White
Beam Angle	50°	Dimmable	NO

SKU: 3290   SKU:3291   SKU: 3292  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED COB Downlight  
10W Adjustable**


Product code	CB10-A1	CRI	Ra>80
Watts	10W	IP Rating	IP20
Input Voltage	AC : 100-240V	Cutting Size	ø105
Flux	750lm	Body Color	White
Beam Angle	50°	Dimmable	NO

SKU: 3293   SKU:3294   SKU: 3295  
 ■ 6000K   ■ 4500K   ■ 2700K




**LED COB Downlight  
8W Adjustable**


Product code	CB8-A1	CRI	Ra>80
Watts	8W	IP Rating	IP20
Input Voltage	AC : 220-265V	Cutting Size	ø80
Flux	560lm	Body Color	White
Beam Angle	60°	Dimmable	NO

SKU: 3201   SKU:3206   SKU: 3202  
 ■ 6000K   ■ 4500K   ■ 2700K

**560**  
Lumens

60°

IP20


**LED COB Downlight  
12W Adjustable**


Product code	CB12-A1	CRI	Ra>80
Watts	12W	IP Rating	IP20
Input Voltage	AC : 220-265V	Cutting Size	ø105
Flux	960lm	Body Color	Inox
Beam Angle	60°	Dimmable	NO

SKU: 3254  
 ■ 6000K

**960**  
Lumens

60°

IP20


**LED COB Downlight  
8W Adjustable**


Product code	CB8-A1	CRI	Ra>80
Watts	8W	IP Rating	IP20
Input Voltage	AC : 220-265V	Cutting Size	ø80
Flux	560lm	Body Color	Inox
Beam Angle	60°	Dimmable	NO

SKU: 3203   SKU:3205   SKU: 3204  
 ■ 6000K   ■ 4500K   ■ 2700K

**560**  
Lumens

60°

IP20


**LED COB Downlight  
8W Adjustable**


Product code	CB8-A1	CRI	Ra>80
Watts	8W	IP Rating	IP20
Input Voltage	AC : 220-265V	Cutting Size	ø80
Flux	560lm	Body Color	White
Beam Angle	60°	Dimmable	NO

SKU: 3207   SKU:3222   SKU: 3212  
 ■ 6000K   ■ 4500K   ■ 2700K

**560**  
Lumens

60°

IP20


**LED COB Downlight  
8W Adjustable**


Product code	CB8-A1	CRI	Ra>80
Watts	8W	IP Rating	IP20
Input Voltage	AC : 220-265V	Cutting Size	ø80
Flux	560lm	Body Color	Inox
Beam Angle	60°	Dimmable	NO

SKU: 3223   SKU:3224   SKU: 3225  
 ■ 6000K   ■ 4500K   ■ 2700K

**560**  
Lumens

60°

IP20


**LED COB Downlight  
25W Adjustable**


Product code	CB25-A1	CRI	Ra>80
Watts	25W	IP Rating	IP20
Input Voltage	AC : 220-240V	Cutting Size	ø160
Flux	2200lm	Body Color	White
Beam Angle	60°	Dimmable	NO

SKU: 3241   SKU:3242  
 ■ 6000K   ■ 4500K

**2200**  
Lumens

60°

IP20


**LED COB Downlight  
35W Adjustable**


Product code	CB35-A1	CRI	Ra>80
Watts	35W	IP Rating	IP20
Input Voltage	AC : 220-240V	Cutting Size	ø210
Flux	3000lm	Body Color	Inox
Beam Angle	60°	Dimmable	NO

SKU: 3243  
 ■ 6000K

**3000**  
Lumens

60°


IP20




**LED COB Downlight**  
**15W - TÜV**



Product code	CB15-A2	CRI	Ra>80
Watts	15W	IP Rating	IP20
Input Voltage	AC : 220-240V	Cutting Size	ø155
Flux	1200lm	Body Color	White
Beam Angle	145°	Dimmable	NO

SKU: 3270   SKU:3271   SKU: 3272  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED COB Downlight**  
**20W - TÜV**



Product code	CB20-A2	CRI	Ra>80
Watts	20W	IP Rating	IP20
Input Voltage	AC : 220-240V	Cutting Size	ø165
Flux	1600lm	Body Color	White
Beam Angle	145°	Dimmable	NO

SKU: 3273   SKU:3274   SKU: 3275  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED COB Downlight**  
**30W - TÜV**



Product code	CB30-A2	CRI	Ra>80
Watts	30W	IP Rating	IP20
Input Voltage	AC : 220-240V	Cutting Size	ø195
Flux	2500lm	Body Color	White
Beam Angle	145°	Dimmable	NO

SKU: 3276   SKU:3277   SKU: 3278  
 ■ 6000K   ■ 4500K   ■ 2700K


**LED COB Downlight**  
**40W - TÜV**



Product code	CB40-A2	CRI	Ra>80
Watts	40W	IP Rating	IP20
Input Voltage	AC : 100-240V	Cutting Size	ø175
Flux	4000lm	Body Color	White
Beam Angle	60°	Dimmable	NO

SKU: 3260   SKU:3261  
 ■ 6000K   ■ 4500K


**LED COB Downlight**  
**60W - TÜV**


Product code	CB60-A1	CRI	Ra>80
Watts	60W	IP Rating	IP20
Input Voltage	AC : 100-240V	Cutting Size	ø205
Flux	5600lm	Body Color	White
Beam Angle	60°	Dimmable	NO

SKU: 3262   SKU:3263  
 ■ 6000K   ■ 4500K







**LED SMD FIRE-RATED PF>0.9**  
**10W - CCT 3000K to 6000K**

Product code	OT10-A1	CRI	Ra>80
Watts	10W	IP Rating	IP65
Input Voltage	AC : 200-240V	Cutting Size	ø60
Flux	750lm	Dimension	ø84x67mm
Beam Angle	40°	Dimmable	YES

SKU: 5044  
CCT Steps  
← 6000K 4500K 3000K →



CCT Knob




**LED SMD FIRE-RATED PF>0.9**  
**6W - Replaceable covers**

Product code	OT6-A2	CRI	Ra>80
Watts	6W	IP Rating	IP65
Input Voltage	AC : 200-265V	Cutting Size	ø60
Flux	540lm	Dimension	ø84x67mm
Beam Angle	40°	Dimmable	YES

SKU:5042 4500K    SKU: 5041 3000K



Magnetic replaceable covers



MAGNETIC CHROME BEZEL FOR 5044

**BEZELS FOR LED FIRE-RATED DOWNLIGHT**  
**Magnetic Bazels**

SKU: 5045	CHROME BEZEL
SKU: 5046	BRUSHED BEZEL

MAGNETIC BRUSHED BEZEL FOR 5044



SKU: 5045



SKU: 5046



CCT Knob


**LED SMD FIRE-RATED PF>0.9**  
**8W - CCT 3000K to 6000K**

Product code	OT8-A1	CRI	Ra>80
Watts	8W	IP Rating	IP65
Input Voltage	AC : 175-265V	Cutting Size	ø65
Flux	570-630lm	Dimension	ø80x80mm
Beam Angle	40°	Dimmable	YES

SKU: 5043    CCT    ← 6000K 4500K 3000K →    3800156650435



Magnetic replaceable covers





LED Strips are a flexible solution for wide variety of lighting applications, both for indoor and outdoor projects, allowing for variable shapes and abstract forms. Functioning as a core or supplementary lighting, LED strips become a common choice of lighting professionals.

**Features:**

- Up to 80% power saving
- Flexible and reliable
- Wide choice of colour – single colour light to RGB
- Variety of IP ratings
- Options for dimming and control

**Application:**

- Indoor and outdoor lighting projects
- Applicable for abstract forms and shapes
- Hidden or ambient light

**LED STRIPS AND ACCESSORIES**

**LED Strip 12V 2835 60 LEDs**  
**4.8W/m - Non Waterproof**


Product code	ST2835-A1	LED Qty	60 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	4.8W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	300lm/m	Width	8mm

SKU: 4702   SKU:4700   SKU: 4703  
 6000K   4500K   2700K


**LED Strip 12V 2835 60 LEDs**  
**4.8W/m - Non Waterproof**


Product code	ST2835-A1	LED Qty	60 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	4.8W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	300lm/m	Width	8mm

SKU: 4704   SKU:4706  
 RED   BLUE


**LED Strip 12V 2835 120 LEDs**  
**9.6W/m - Non Waterproof**


Product code	ST2835-A1	LED Qty	120 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	9.6W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	600lm/m	Width	8mm

SKU: 4710   SKU:4740   SKU: 4711  
 6000K   4500K   2700K


**LED Strip 12V 2835 204 LEDs**  
**16.5W/m - Non Waterproof**


Product code	ST2835-A1	LED Qty	204 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	16.5W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	1700lm/m	Width	10mm

SKU: 4761   SKU:4762   SKU: 4763  
 6000K   4500K   2700K


**LED Strip 12V 5050 60 LEDs**  
**14.4W/m - Non Waterproof**


Product code	ST5050-A1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	1000lm/m	Width	12mm

SKU: 4313  
 RGB + 6000K


**LED Strip 12V 5050 60 LEDs**  
**14.4W/m - Non Waterproof**


Product code	ST5050-A1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	1000lm/m	Width	12mm

SKU: 4314  
 RGB + 3000K



**LED Strip 12V 2835 60 LEDs**  
**4.8W/m - Waterproof**


5m-Roll



IP54



Product code	ST2835-A2	LED Qty	60 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	4.8W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP54
Flux/Meter	300lm/m	Width	8mm

 SKU: 4732    SKU:4731    SKU: 4733  
 ■ 6000K    ■ 4500K    ■ 2700K

**LED Strip 12V 2835 60 LEDs**  
**4.8W/m - Waterproof**


5m-Roll



IP54



Product code	ST2835-A2	LED Qty	60 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	4.8W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP54
Flux/Meter	300lm/m	Width	8mm

 SKU: 4734    SKU:4735    SKU: 4736  
 ■ RED    ■ GREEN    ■ BLUE

**LED Strip 12V 2835 120 LEDs**  
**9.6W/m - Waterproof**


5m-Roll



IP54



Product code	ST2835-A2	LED Qty	120 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	9.6W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP54
Flux/Meter	600lm/m	Width	8mm

 SKU: 4720    SKU: 4721  
 ■ 6000K    ■ 2700K

**LED Strip 12V 5050 30 LEDs**  
**7.2W/m - Non Waterproof**


5m-Roll



IP20



Product code	ST5050-A1	LED Qty	30 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	7.2W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	500lm/m	Width	10mm

 SKU: 4801    SKU:4800    SKU: 4802  
 ■ 6000K    ■ 4500K    ■ 2700K

**LED Strip 12V 5050 60 LEDs**  
**14.4W/m - Non Waterproof**


5m-Roll



IP20



Product code	ST5050-A1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	1000lm/m	Width	10mm

 SKU: 4807    SKU:4827    SKU: 4808  
 ■ 6000K    ■ 4500K    ■ 2700K

**LED Strip 12V 5050 60 LEDs**  
**14.4W/m - Non Waterproof**


5m-Roll



IP20



Product code	ST5050-A1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	1000lm/m	Width	10mm

 SKU: 4823    SKU:4825  
 ■ RED    ■ BLUE






LED Strip 12V 5050 30 LEDs  
**7.2W/m - Waterproof**



Product code	ST5050-A2	LED Qty	30 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	7.2W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP54
Flux/Meter	500lm/m	Width	10mm

SKU: 4809   SKU:4811   SKU: 4810  
 6000K   4500K   2700K



LED Strip 12V 5050 60 LEDs  
**14.4W/m - Waterproof**



Product code	ST5050-A2	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP54
Flux/Meter	1000lm/m	Width	10mm

SKU: 4839   SKU:4841   SKU: 4840  
 6000K   4500K   2700K



LED Strip 12V 5050 60 LEDs  
**14.4W/m - Waterproof**



Product code	ST5050-A2	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP54
Flux/Meter	1000lm/m	Width	10mm

SKU: 4844   SKU:4842  
 RED   BLUE



LED Strip 12V 5050 30 LEDs  
**7.2W/m**



Product code	ST5050-A1	LED Qty	30 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	7.2W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20 ; IP54
Flux/Meter	500lm/m	Width	10mm

SKU: 4311 RGB   IP20  
 SKU: 4315 RGB   IP54



LED Strip 12V 5050 60 LEDs  
**14.4W/m**



Product code	ST5050-A1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20 ; IP54
Flux/Meter	1000lm/m	Width	10mm

SKU: 4312 RGB   IP20  
 SKU: 4316 RGB   IP54



LED Strip 24V 5050 60 LEDs  
**14.4W/m**



Product code	ST5050-A1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20 ; IP54
Flux/Meter	1000lm/m	Width	10mm

SKU: 4861 RGB   3800156648616   IP20  
 SKU: 4862 RGB   3800156648623   IP54



**LED Strip 12V 4040 60 LEDs**  
**8.5W/m - Non Waterproof**


Product code	ST4040-A1	LED Qty	60 SMD/m
Type LED	SMD 4040	Material	Flex PCB
Power/Meter	8.5W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	500lm/m	Width	10mm

SKU: 4921   SKU:4922   SKU: 4923  
 6000K   4500K   2700K


**LED Strip 24V 2835 120 LEDs**  
**9.6W/m - Non Waterproof**


Product code	ST2835-A3	LED Qty	120 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	9.6W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	1200lm/m	Width	10mm

SKU: 4856   SKU:4857   SKU: 4858  
 6000K   4500K   2700K


**LED Strip 12V 4014 120 LEDs**  
**12W/m - Non Waterproof**


Product code	ST4014-A1	LED Qty	120 SMD/m
Type LED	SMD 4014	Material	Flex PCB
Power/Meter	12W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	1000lm/m	Width	8mm

SKU: 4904   SKU:4905   SKU: 4906  
 6000K   4500K   2700K


**LED Strip 24V 5050 60 LEDs**  
**14.4W/m - Non Waterproof**


Product code	ST5050-A3	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	600lm/m	Width	10mm

SKU: 4851   SKU:4850   SKU: 4852  
 6000K   4500K   2700K


**LED Strip 12V 5630 60 LEDs**  
**12W/m - Non Waterproof**


Product code	ST5630-A1	LED Qty	60 SMD/m
Type LED	SMD 5630	Material	Flex PCB
Power/Meter	12W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	1000lm/m	Width	10mm

SKU: 4911   SKU:4913   SKU: 4912  
 6000K   4500K   2700K


**LED Strip 24V 5050 60 LEDs**  
**14.4W/m - Waterproof**


Product code	ST5050-A4	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	14.4W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP54
Flux/Meter	600lm/m	Width	10mm

SKU: 4853   SKU:4854   SKU: 4855  
 6000K   4500K   2700K



**NEW**
**LED Strip 24V 2835 126 LEDs**  
**10W/m - Non Waterproof**


Product code	ST2835-A3	LED Qty	126 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	10W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	1300lm/m	Width	8mm

 SKU: 4871   SKU: 4872   SKU: 4873  
 6000K   4000K   3000K

**LED Strip 24V 2835 196 LEDs**  
**20W/m - Non Waterproof**


Product code	ST2835-A4	LED Qty	196 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	20W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	2100lm/m	Width	12mm

 SKU: 4421   SKU: 4422   SKU: 4423  
 6000K   4500K   2700K
**NEW**
**LED Strip 24V 2835 182 LEDs**  
**14W/m - Waterproof**


Product code	ST2835-A3	LED Qty	182 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	14W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	1820lm/m	Width	8mm

 SKU: 4874   SKU: 4875   SKU: 4876  
 6000K   4000K   3000K

**LED Strip 24V 2835 196 LEDs**  
**20W/m - Waterproof**


Product code	ST2835-A5	LED Qty	196 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	20W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP65
Flux/Meter	2100lm/m	Width	12mm

 SKU: 4451   SKU: 4452   SKU: 4453  
 6000K   4500K   2700K
**NEW**
**LED Strip 24V 2835 238 LEDs**  
**18W/m - Non Waterproof**


Product code	ST5054-A1	LED Qty	238 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	18W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	2340lm/m	Width	12mm

 SKU: 4877   SKU: 4878   SKU: 4879  
 6000K   4000K   3000K

**LED Strip 24V 5054 60 LEDs**  
**16W/m - Non Waterproof**


Product code	ST5054-A1	LED Qty	60 SMD/m
Type LED	SMD 5054	Material	Flex PCB
Power/Meter	16W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	1100lm/m	Width	12mm

 SKU: 4431   SKU: 4432   SKU: 4433  
 6000K   4500K   2700K


**NEW**

LED Strip 12V 2835 120 LEDs  
**9W/m - Non Waterproof**  
**5mm Width - Slim**



Product code	ST2835-A1	LED Qty	120 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	9W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	900lm/m	Width	5mm

SKU: 4907    SKU: 4908    SKU: 4909  
 6000K    4500K    2700K

**NEW**

LED Strip 24V COB 624 LEDs  
**7+7W/m - Non Waterproof**



Product code	ST624-A1	LED Qty	624 SMD/m
Type LED	COB	Material	Flex PCB
Power/Meter	7+7W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	700lm/m	Width	10mm

SKU: 4961  
 CCT  
 6000K    4000K    2700K



LED Strip 24V COB 320 LEDs  
**10W/m - Non Waterproof**



Product code	ST320-A1	LED Qty	320 SMD/m
Type LED	COB	Material	Flex PCB
Power/Meter	10W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	900lm/m	Width	10mm

SKU: 4941    SKU: 4942    SKU: 4943  
 6000K    4000K    3000K

**NEW**

LED Strip 24V COB 640 LEDs  
**8+8W/m - Non Waterproof**



Product code	ST640-A1	LED Qty	640 SMD/m
Type LED	COB	Material	Flex PCB
Power/Meter	8+8W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	650lm/m	Width	10mm

SKU: 4960  
 CCT  
 6000K    4000K    3000K



LED Strip 24V COB 512 LEDs  
**12W/m - Non Waterproof**



Product code	ST512-A1	LED Qty	512 SMD/m
Type LED	COB	Material	Flex PCB
Power/Meter	10W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	1100lm/m	Width	10mm

SKU: 4944    SKU: 4945    SKU: 4946  
 6000K    4000K    3000K




**LED Strip 24V COB 320 LEDs D Shape**  
**20W/m - Waterproof**


Product code	ST320-A2	LED Qty	320 SMD/m
Type LED	COB	Material	Flex PCB
Power/Meter	10W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP65
Flux/Meter	900lm/m	Width	10x4mm


 SKU: 6540  
 FIX CLIP WITH 2 SCREWS

 SKU: 4947   SKU: 4948   SKU: 4949  
 6000K   4500K   3000K

**LED Strip 24V COB 320 LEDs**  
**10W/m - Non Waterproof**


Product code	ST320-A2	LED Qty	320 SMD/m
Type LED	COB	Material	Flex PC
Power/Meter	10W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	1000lm/m	Dimension	5x5000 mm

 SKU: 4931   SKU: 4932   SKU: 4933  
 6000K   4500K   3000K

**LED Strip 24V COB 640 LEDs**  
**12W/m - Non Waterproof**


Product code	ST640-A1	LED Qty	640 SMD/m
Type LED	COB	Material	Flex PCB
Power/Meter	12W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	500lm/m	Width	12x2.5mm

 SKU: 4950  
 RGB+6000K

**LED Strip 48V COB 504 LEDs**  
**6W/m - Non Waterproof**


Product code	ST320-A2	LED Qty	504 SMD/m
Type LED	COB	Material	Flex PC
Power/Meter	6W/m	Beam Angle	120°
Voltage	DC: 48V	IP Rating	IP20
Flux/Meter	630lm/m	Dimension	10x25000 mm

 SKU: 4934   SKU: 4935   SKU: 4936  
 6000K   4500K   3000K

**Middel connector**

SKU: 6622


**One end connector with wire**

SKU: 6623


**Two end connector**

SKU: 6624


**LED Strip 48V COB 504 LEDs -Milky**  
**6W/m - Waterproof**


Product code	ST504-A2	LED Qty	504 SMD/m
Type LED	COB	Material	Flex PC
Power/Meter	6W/m	Beam Angle	120°
Voltage	DC: 48V	IP Rating	IP67
Flux/Meter	500lm/m	Dimension	10x20000 mm

 SKU: 4937   SKU: 4938   SKU: 4939  
 6000K   4500K   3000K

 SKU: 6539  
 FIX CLIP WITH 2 SCREWS


**LED Strip 24V 2835 120 LEDs**  
**9W/m - Non Waterproof**


Product code	ST2835-A3	LED Qty	120 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	9W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	1000lm/m	Width	8x2.5mm

SKU: 4865    SKU: 4866    SKU: 4867  
 ■ 6000K    ■ 4500K    ■ 3000K

**LED Strip 24V 2835 120 LEDs**  
**10W/m - Non Waterproof**  
**Runnig Water Effect**


Product code	ST120-A1	LED Qty	120 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	10W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	950lm/m	Width	8.25mm

SKU: 4940  
 ■ 4500K

**RF Controller For Running Water Effect**


Input: DC12-24V  
 Output: 1 group SPI signal  
 Mode: 28 kinds  
 Contral IC point: 2048 point  
 Support IC: WS2811,WS2812,16703,UCS1903  
 SIZE: 40x12x5mm

SKU: 6541

**Amplifier**


Voltage: DC5-24V  
 Output: 2x4=8 group SPI singal  
 Function: Multiple separate controllers by connect in parallel  
 Remark: 8 pcs light can change at same step with connection in parallel

SKU: 6542



2 PIN connector for 8MM COB  
 SKU: 6549



2 PIN fasten connector 8MM SMD  
 SKU: 6552



3 PIN connector 10mm 3PIN SMD  
 SKU: 6555



5 PIN DUAL connector 10mm 5 IN SMD RGBW  
 SKU: 6558



SMD 10mm PCB single color 2 pin  
 SKU: 6561



SMD 10mm PCB 3 pin (CCT, magic RGB) 15cm  
 SKU: 6564



PIN connector for 8MM SMD  
 SKU: 6550



2 PIN fasten DUAL connector 8MM COB  
 SKU: 6553



3 PIN connector with wirep 10mm 3PIN SMD  
 SKU: 6556



6 PIN connectro 12mm 6 PIN SMD  
 SKU: 6559



DUAL SMD 10mm PCB single color 2 pin  
 SKU: 6562



SMD 10mm PCB 4 pin (RGB)  
 SKU: 6565



2 PIN fasten connector 8MM COB  
 SKU: 6551




2 PIN fasten DUAL connector 8MM SMD  
 SKU: 6554



5 PIN connector 10mm 5PIN SMD RGBW  
 SKU: 6557



6 PIN DUAL connector 12mm 6 PIN SMD  
 SKU: 6560



SMD 10mm PCB 3 pin (CCT, magic RGB)  
 SKU: 6563



SMD 10mm PCB 5 pin (RGBW)  
 SKU: 6566


**LED Strip 24V 5054 60 LEDs**  
**16W/m - Waterproof**
**3**  
 Years  
 Warranty


Product code	ST5054-A2	LED Qty	60 SMD/m
Type LED	SMD 5054	Material	Flex PCB
Power/Meter	16W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP65
Flux/Meter	1100lm/m	Width	10mm

 SKU: 4461    SKU: 4462    SKU: 4463  
 6000K    4500K    2700K

**LED Strip 12V 2835 196 LEDs**  
**20W/m - Non Waterproof**
**3**  
 Years  
 Warranty


Product code	ST2835-A5	LED Qty	196 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	20W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	2100lm/m	Width	12mm

 SKU: 4424    SKU: 4425    SKU: 4426  
 6000K    4500K    2700K

**LED Strip 24V 5025 60 LEDs**  
**16W/m - CCT Adjustable**  
**Non Waterproof**
**3**  
 Years  
 Warranty


Product code	ST5025-A1	LED Qty	60 SMD/m
Type LED	SMD 5025	Material	Flex PCB
Power/Meter	16W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	800lm/m	Width	10mm

 SKU: 4441  
 CCT  
 6000K    4000K    3000K

**LED Strip 12V 2835 196 LEDs**  
**20W/m - Waterproof**
**3**  
 Years  
 Warranty


Product code	ST2835-A6	LED Qty	196 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	20W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP65
Flux/Meter	2100lm/m	Width	12mm

 SKU: 4454    SKU: 4455    SKU: 4456  
 6000K    4500K    2800K

**LED Strip 24V 5025 60 LEDs**  
**16W/m - CCT Adjustable**  
**Waterproof**
**3**  
 Years  
 Warranty


Product code	ST5025-A2	LED Qty	60 SMD/m
Type LED	SMD 5025	Material	Flex PCB
Power/Meter	16W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP65
Flux/Meter	800lm/m	Width	10mm

 SKU: 4471  
 CCT  
 6000K    4000K    3000K

**LED Strip 12V 5050 60 LEDs**  
**16W/m - Non Waterproof**


Product code	ST5050-A7	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	16W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	1600lm/m	Width	12mm

SKU: 4485    RGB+White Light    3800156644854

SKU: 4486    RGB+Warm White    3800156644861


**3**  
 Years  
 Warranty



LED Strip 12V 5050 60 LEDs  
**16W/m - Waterproof**



Product code	ST5050-A8	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	16W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP65
Flux/Meter	1600lm/m	Width	12mm

**3** Years  
Warranty

SKU: 4487 RGB+White Light 3800156644878

SKU: 4488 RGB+Warm White 3800156644885



LED Strip 24V 5050 60 LEDs  
**16W/m Waterproof**



Product code	ST5050-A6	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	16W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP65
Flux/Meter	1600lm/m	Width	10mm

**3** Years  
Warranty

SKU: 4483 RGB+6000K

SKU: 4484 RGB+3000K



LED Strip 24V 5050 60 LEDs  
**9.5W/m - Non Waterproof**



Product code	ST5050-A9	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	9.5W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	950lm/m	Width	10mm

**3** Years  
Warranty

SKU: 4480 + 6000K  
 4000K  
 3000K CCT



LED Strip 24V 5050 60 LEDs  
**16W/m - Non Waterproof**



Product code	ST5050-A5	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	16W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP20
Flux/Meter	1600lm/m	Width	10mm

**3** Years  
Warranty

SKU: 4481 RGB+6000K

SKU: 4482 RGB+3000K



CONNECTOR FOR STRIP 3528  
SKU: 5151

CONNECTOR FOR STRIP 5050  
SKU: 5152

CONNECTOR FOR STRIP RGB  
SKU: 6608

ANGLE CONNECTOR FOR STRIP 3528 8mm  
SKU: 6619

ANGLE CONNECTOR FOR STRIP 5050 10mm  
SKU: 6620

ANGLE CONNECTOR FOR STRIP RGB 10mm  
SKU: 6621

CONNECTOR FOR STRIP DC MALE  
SKU: 6610

CONNECTOR FOR STRIP DC FEMALE  
SKU: 6611

FLEXIBLE FOR STRIP 3528 DC FEMALE  
SKU: 6612

FLEXIBLE FOR STRIP 5050 DC FEMALE  
SKU: 6613

FLEXIBLE CONNECTOR FOR LED STRIP RGB  
SKU: 6614


FLEXIBLE CONNECTOR FOR LED STRIP 3528  
SKU: 6615

FLEXIBLE CONNECTOR FOR LED STRIP 5050  
SKU: 6616

FLEXIBLE CONNECTOR FOR STRIP RGB+WH  
SKU: 6618

FLEXIBLE FOR RGB LED STRIP WITH PIN  
SKU: 6617





SMD 2216

SMD 2110


**LED Strip 24V HIGH POWER**  
**SMD2216 ; SMD2110**

1900

Lumens



240 pcs

Product code	ST2216-A1
Type LED	SMD 2216
Power/Meter	22W/m
Voltage	DC: 24V
Flux/Meter	1900lm/m

LED Qty	240 SMD/m
Material	Flex PCB
Beam Angle	120°
IP Rating	IP20
Width	10mm

3 Years

Warranty



5m-Roll



IP20

SKU: 4403 ■ 3000K

2200

Lumens



300 pcs

Product code	ST2216-A1
Type LED	SMD 2216
Power/Meter	24W/m
Voltage	DC: 24V
Flux/Meter	2200lm/m

LED Qty	300 SMD/m
Material	Flex PCB
Beam Angle	120°
IP Rating	IP20
Width	10mm

3 Years

Warranty



5m-Roll



IP20

SKU: 4404 ■ 3000K

2500

Lumens



560 pcs

Product code	ST2110-A1
Type LED	SMD 2110
Power/Meter	32W/m
Voltage	DC: 24V
Flux/Meter	2500lm/m

LED Qty	560 SMD/m
Material	Flex PCB
Beam Angle	120°
IP Rating	IP20
Width	12mm

3 Years

Warranty



5m-Roll



IP20

SKU: 4405 ■ 3000K

3400

Lumens



700 pcs

Product code	ST2110-A1
Type LED	SMD 2110
Power/Meter	38W/m
Voltage	DC: 24V
Flux/Meter	3400lm/m

LED Qty	700 SMD/m
Material	Flex PCB
Beam Angle	120°
IP Rating	IP20
Width	12mm

3 Years

Warranty



5m-Roll



IP20

SKU: 4406 ■ 3000K



RGB

3 Years

Warranty



5m-Roll



IP20


**LED Digital Strip**  
**Addressable**

Product code	ST10-A1
Type LED	WS2811 10 Pixels
Power/Meter	7W/m
Voltage	DC: 12V
Flux/Meter	550lm/m
LED Qty	30 SMD/m
Material	Flex PCB
Beam Angle	120°
IP Rating	IP20
Width	10mm
EAN Code	3800156644908

SKU: 4490

SKU: 4491

SKU: 4492

Product code	ST30-A1
Type LED	WS2812b 30 Pixels
Power/Meter	8W/m
Voltage	DC: 5V
Flux/Meter	600lm/m
LED Qty	30 SMD/m
Material	Flex PCB
Beam Angle	120°
IP Rating	IP20
Width	10mm
EAN Code	3800156644915

Product code	ST60-A1
Type LED	WS2812b 30 Pixels
Power/Meter	16W/m
Voltage	DC: 5V
Flux/Meter	1200lm/m
LED Qty	60 SMD/m
Material	Flex PCB
Beam Angle	120°
IP Rating	IP20
Width	10mm
EAN Code	3800156644922

RGB



Addressable

**Digital LED Strip Controller**  
**DC5-24V SD-CARD**


Voltage	5V-24V
IP Rating	IP20
Dimension	80x55x20mm
SKU: 6331	

**Digital LED Strip Controller**  
**DC5-24V**


Voltage	5V-24V
IP Rating	IP20
Dimension	80x55x20mm
SKU: 6332	


**LED Strip 12V 5050 30 LEDs - SET  
 Adapter + ir Controller + Remote**


Product code	ST5050-B1	LED Qty	30 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	240lm/m	Width	10mm

SKU: 4321 RGB IP20


**LED Strip 12V 5050 30 LEDs - SET  
 Adapter + Bluetooth Music + Remote**


Product code	ST5050-B1	LED Qty	30 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	240lm/m	Width	10mm

SKU: 4328 RGB IP20


**LED Strip 12V 5050 60 LEDs - SET  
 Adapter + ir Controller + Remote**


Product code	ST5050-B1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	8W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	480lm/m	Width	10mm

SKU: 4322 RGB IP20


**LED Strip 12V 5050 60 LEDs - SET  
 Adapter + Bluetooth Music + Remote**


Product code	ST5050-B1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	8W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	480lm/m	Width	10mm

SKU: 4329 RGB IP20


**LED Strip 12V 5050 60 LEDs - SET  
 Adapter + ir Controller + Remote  
 Waterproof**


Product code	ST5050-B1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	8W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP54
Flux/Meter	480lm/m	Width	10mm

SKU: 4323 RGB IP54


**LED Strip 12V 5050 60 LEDs - SET  
 Adapter + Bluetooth Music + Remote  
 Waterproof**


Product code	ST5050-B1	LED Qty	60 SMD/m
Type LED	SMD 5050	Material	Flex PCB
Power/Meter	8W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP54
Flux/Meter	480lm/m	Width	10mm

SKU: 4330 RGB IP54




**Smart LED Strip 12V 5050+2835 - SET  
 Adapter + Wifi Controller**


Product code	ST5050-B1	LED Qty	60 SMD/m
Type LED	SMD 5050+2835	Material	Flex PCB
Power/Meter	4W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	240lm/m	Width	10mm

SKU: 4324 RGB+W IP20

SKU: 4325 RGB+WW IP20


**Smart LED Strip 12V CCT 5050+2835 -SET  
 Adapter + Wifi Controller**



Product code	ST5050-B1	LED Qty	90 SMD/m
Type LED	SMD 5050+2835	Material	Flex PCB
Power/Meter	6W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP54
Flux/Meter	360lm/m	Width	12mm

SKU: 4326 RGB+CCT IP20



**TV LED Strip 5V 5050+2835 60LEDs - SET  
 Wifi Controller + Remote**


Product code	ST5050-B1	LED Qty	60 SMD/m
Type LED	SMD 5050+2835	Material	Flex PCB
Power/Meter	4W/m	Beam Angle	120°
Voltage	DC: 5V	IP Rating	IP20
Flux/Meter	240lm/m	Width	10mm


SKU: 4327 RGB+WW IP20

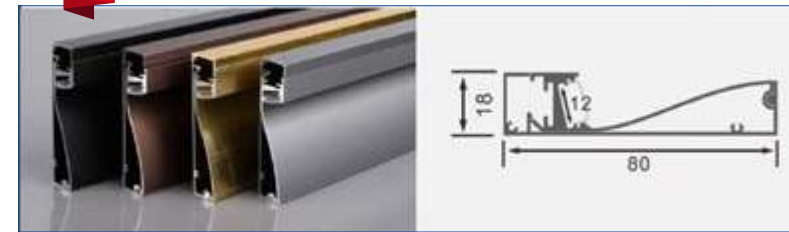
**NEW**


- SKU: 15115 Silver Body (L=2m)
- SKU: 15116 Black Body (L=2m)
- SKU: 15117 Iron Oxide Gray (L=2m)
- SKU: 15118 Corner Silver Body
- SKU: 15119 Corner Black Body

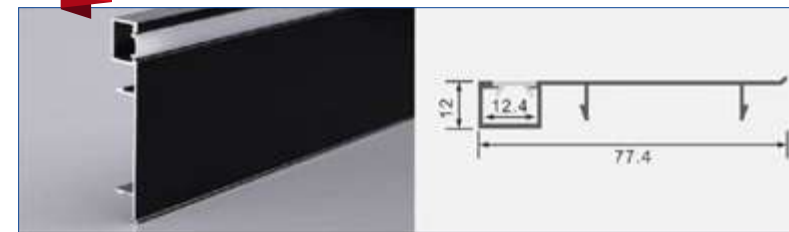**NEW**


- SKU: 15120 Black Body (L=2m)    
White Cover
- SKU: 15121 White Body (L=2m)    
White Cover

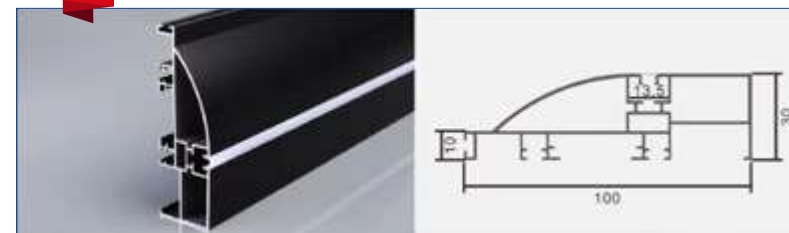**NEW**





- SKU: 15122 Black Body (L=2m)    
White Cover
- SKU: 15123 White Body (L=2m)    
White Cover

**NEW**



- SKU: 15113 White Body (L=2m)    
White Cover
- SKU: 15114 White Body (L=2m)    
Black Cover

**NEW**











- SKU: 15130 Keel Mesh for NEON 16x10mm
- SKU: 15131 Keel Mesh for NEON 16x8mm


**NEW**SKU: 15111 White Body- White Cover (L=2m) SKU: 15112 White Body- Black Cover (L=2m) **NEW**SKU: 15124 Black Body- White Cover (L=2m) SKU: 15125 White Body- White Cover (L=2m) SKU: 15126 Warble Body- White Cover (L=2m) 

With hanging accessories


**NEW**SKU: 15127 Black Body- White Cover (L=2m) SKU: 15128 White Body- White Cover (L=2m) SKU: 15129 Warble Body- White Cover (L=2m) 

With hanging accessories


**NEW**SKU: 5143 Silver Body- White Cover (L=2m) **NEW**SKU: 5144 Silver Body- White Cover (L=2m) **NEW**SKU: 5145 Silver Body- White Cover (L=2m) SKU: 5104 Black Body- White Cover (L=2m) SKU: 5105 Black Body- Black Cover (L=2m) SKU: 5106 White Body- White Cover (L=2m) SKU: 5193 Silver Body- White Cover (L=1m) SKU: 5192 Silver Body- White Cover (L=2m) SKU: 5190 Silver Body- White Cover (L=1m) SKU: 5191 Silver Body- White Cover (L=2m) SKU: 5184 White Body- White Cover (L=2m) SKU: 5185 Black Body- White Cover (L=2m) SKU: 5108 Silver Body- White Cover (L=2m) SKU: 5113 Silver Body- White Cover (L=2m) SKU: 5175 Silver Body- White Cover (L=2m)




SKU: 5107 Black Body- Black Cover (L=2m) ■■



SKU: 5109 Silver Body- White Cover (L=2m) ■□




SKU: 5183 Silver Body- White Cover (L=2m) ■□




SKU: 5101 Black Body- Black Cover (L=2m) ■□

SKU: 5102 White Body- White Cover (L=2m) □□


SKU: 5103 Silver Body- White Cover (L=2m) ■□



SKU: 5110 Silver Body- White Cover (L=2m) ■□




SKU: 5150 Silver Body- White Cover (L=2m) ■□




SKU: 5002 Bendable -Silver body (L=1m) ■


SKU: 5001 Bendable -Silver body (L=2m) ■




SKU: 5111 Silver Body- White Cover (L=2m) ■□




SKU: 5112 Silver Body- White Cover (L=2m) ■□




SKU: 5162 Silver Body- White Cover (L=2m) ■□



SKU: 5165 Silver Body- White Cover (L=2m) ■□





SKU: 5166 Silver Body- White Cover (L=2m) ■□



SKU: 5114 Black Body- Black Cover (L=2m) ■■

SKU: 5115 Silver Body- White Cover (L=2m) ■□


SKU: 5116 Black Body- White Cover (L=2m) ■□



SKU: 5117 Black Body- Black Cover (L=2m) ■■

SKU: 5118 Silver Body- White Cover (L=2m) ■□



SKU: 5119 Black Body- White Cover (L=2m) ■□



SKU: 5120 Black Body- Black Cover (L=2m) ■■

SKU: 5121 Silver Body- White Cover (L=2m) ■□



SKU: 5122 Black Body- White Cover (L=2m) ■□




SKU: 5124 Black Body- Black Cover (L=2m) ■■

SKU: 5123 Silver Body- White Cover (L=2m) ■□


SKU: 5125 Black Body- White Cover (L=2m) ■□

**NEW**



SKU: 5141 Silver Body- White Cover (L=2m) ■□

**NEW**



SKU: 5142 Silver Body- White Cover (L=2m) ■□




SKU: 5128 Silver Body- White Cover (L=2m) ■□




SKU: 5130 Silver Body- White Cover (L=2m) ■□



SKU: 5132 Silver Body- White Cover (L=2m) ■□



SKU: 5133 Silver Body- White Cover (L=2m) ■□



SKU: 5134 Silver Body- White Cover (L=2m) ■□



The new range of silicone encapsulated Neon by OPTONICA LED comprises of highly durable and flexible linear LED Solutions - suitable for both indoor and outdoor architectural applications. Designed using high-grade silicone, the neon is:

- Able to withstand wide temperature amplitudes
- Resistant to the build-up of dirt and dust, making it the first to come with a self-cleaning property
- Waterproof and impact resistant
- UV, flame and solvent resistant

## LED STRIPS 220V AND FLEX NEON



LED Strip S-Type 12V 2835 60 LEDs  
**7.2W/m - Non Waterproof**

Product code	M02835-A2	LED Qty	60 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	7.2W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	720lm/m	Width	6mm


**3**  
Years  
Warranty



5m-Roll



IP20



Free Angle Bending

SKU: 4941   SKU: 4946   SKU: 4942  
 6000K   4000K   3000K



LED Strip S-Type 12V 2835 60 LEDs  
**7.2W/m - Waterproof**

Product code	M02835-A2	LED Qty	60 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	7.2W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP65
Flux/Meter	720lm/m	Width	6mm


**3**  
Years  
Warranty



5m-Roll



IP65



Free Angle Bending

SKU: 4551   SKU: 4552  
 6000K   2700K



LED Strip S-Type 12V 2835 60 LEDs  
**7.2W/m - Non Waterproof**

Product code	M02835-A2	LED Qty	60 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	7.2W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP20
Flux/Meter	720lm/m	Width	6mm


**3**  
Years  
Warranty



5m-Roll



IP20



Free Angle Bending

SKU: 4943   SKU: 4945   SKU: 4944  
 RED   GREEN   BLUE



LED Strip S-Type 12V 2835 60 LEDs  
**7.2W/m - Waterproof**

Product code	M02835-A2	LED Qty	60 SMD/m
Type LED	SMD 2835	Material	Flex PCB
Power/Meter	7.2W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP65
Flux/Meter	720lm/m	Width	6mm


**3**  
Years  
Warranty



5m-Roll



IP65



Free Angle Bending

SKU: 4553   SKU: 4555   SKU: 4554  
 RED   GREEN   BLUE





/m  
120 pcs  
 -Roll  
50m-Roll  
  
IP65



**LED FLEX NEON 12V -50m Roll**  
**2835 120 SMD/m**

Product code	ST12-A2	LED Qty	120 SMD/m
Type LED	SMD 2835	Material	Flex PC
Power/Meter	6W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP65
Flux/Meter	300lm/m	Dimension	16x8 mm

SKU: 4590	6000K	
SKU: 4591	4000K	
SKU: 4592	2800K	
SKU: 4593	Blue	
SKU: 4594	Red	
SKU: 4595	Green	
SKU: 4596	Ice Blue	
SKU: 4597	Lemon	
SKU: 4598	Golden	
SKU: 4599	PURPLE	



/m  
120 pcs  
 -Roll  
50m-Roll  
  
IP65



**LED FLEX NEON 220V -50m Roll**  
**2835 120 SMD/m**

Product code	ST220-A2	LED Qty	120 SMD/m
Type LED	SMD 2835	Material	Flex PC
Power/Meter	8.5W/m	Beam Angle	120°
Voltage	AC: 220V	IP Rating	IP65
Flux/Meter	300lm/m	Dimension	Single 16x10 mm RGB 25x13 mm

SKU: 4581	6000K	
SKU: 4580	4000K	
SKU: 4582	2800K	
SKU: 4584	RED	
SKU: 4585	GREEN	
SKU: 4583	BLUE	
SKU: 4587	YELLOW	
SKU: 4586	AMBER	
SKU: 4588	PINK	
SKU: 4589	RGB	

PLUG IN + CONNECTOR PIN



SKU: 6602

MOUNTING BRACKET



SKU: 6603

ALUMINIUM CLIPS



SKU: 6601

END CAP FOR



SKU: 6605

INPUT CABLE + CONNECTOR + PLUG



SKU: 6635

MIDDLE CONNECTOR



SKU: 6634

ALUMINIUM CHANNEL WITH 2 SCREWS



SKU: 6636

END CAP FOR SINGLE COLOUR



SKU: 6637

CONNECTOR PLUG



SKU: 6604



POWER CABLE+RGB CONTROLLER



SKU: 6638

ALUMINIUM CHANNEL , 5CM RGB



SKU: 6639

END CAP FOR RGB



SKU: 6640

**NEW**
**LED Strip 220V COB 480 LEDs**  
**10W/m - Connect-Anyway**


50m-Roll



IP65

Product code	ST480-A1	LED Qty	480 SMD/m
Type LED	COB	Material	Flex PCB
Power/Meter	10W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP65
Flux/Meter	800lm/m	Width	9x4mm

 SKU: 4957    SKU:4958    SKU: 4959  
 ■ 6000K    ■ 4000K    ■ 3000K
**NEW**
**LED Flex Neon - Magic RGB**  
**9W/m - Waterproof**


5m-Roll



IP65

Product code	ST72-A1	LED Qty	72 SMD/m
Type LED	SMD 3535	Material	Flex PCB
Power/Meter	9W/m	Beam Angle	120°
Voltage	DC: 24V	IP Rating	IP65
Flux/Meter	250lm/m	Width	6x12mm

 SKU: 4579    Magic RGB   
 SKU: 6581    Fix clip for magic RGB neon
**NEW**
**LED FLEX NEON 24V -5m Roll**  
**2835 140 SMD/m**


5m-Roll



IP65

Product code	ST24-A1	LED Qty	140 SMD/m
Type LED	SMD 2835	Material	Flex PC
Power/Meter	10W/m	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP65
Flux/Meter	300lm/m	Dimension	12x20 mm

 SKU: 4571    SKU:4572    SKU: 4573  
 ■ 6000K    ■ 4000K    ■ 3000K

SKU: 6591    Fix clip for Neon


**Magic RGB Bluetooth RF 2.4G Remote Controller**

Input Voltage	DC5V-24V
Output	SPI Signal
Buttons	24 Keys
IP Rating	IP20



IP20

SKU: 6582


**CCT RF Controller**

Input Voltage	DC12-24V
Output	2Channels
Output Current	10A (each channel)
Output Power	12V-240W ; 24V-480W



IP20

SKU: 6583



**LED Strips 220V -50m Roll**  
**2835 120 SMD/m**

/m  
120 pcs

IP65



Product code	ST220-A3	LED Qty	120 SMD/m
Type LED	SMD 2835	Material	Flex PC
Power/Meter	9W/m	Beam Angle	120°
Voltage	AC: 220V	IP Rating	IP65
Flux/Meter	900lm/m	Dimension	10x4.3 mm

SKU: 4951    SKU: 4952    SKU: 4953  
 6000K    4500K    3000K

50m-Roll



INPUT CABLE + CONNECTOR  
SKU: 6543



FIX CLIP  
SKU: 6544



END CAP FOR 2835  
SKU: 6545



/m  
120 pcs

50m-Roll

IP65

**LED Strips 220V -50m Roll**  
**5730 120 SMD/m**

Product code	ST220-A1	LED Qty	120 SMD/m
Type LED	SMD 5730	Material	Flex PC
Power/Meter	10W/m	Beam Angle	120°
Voltage	AC: 220V	IP Rating	IP65
Flux/Meter	500lm/m	Dimension	13x5 mm

SKU: 4611    SKU: 4613    SKU: 4612  
 6000K    4000K    2800K



2835/5730 INPUT CABLE + CONNECTOR  
SKU: 6631



2835/5730 MIDDLE CONNECTOR  
SKU: 6633



2835/5730 FIXING  
SKU: 6632




END CAP FOR 220V  
SKU: 6637

**LED Strips COB 220V -50m Roll**  
**COB Waterproof**

/m  
288 pcs

IP65

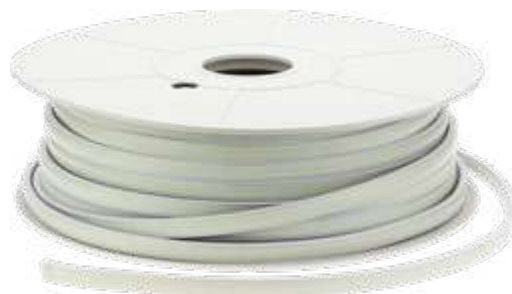

Product code	ST228-A1	LED Qty	288 SMD/m
Type LED	COB	Material	Flex PC
Power/Meter	10W/m	Beam Angle	120°
Voltage	AC: 220V	IP Rating	IP65
Flux/Meter	700lm/m	Dimension	12x5 mm

SKU: 4954    SKU: 4955    SKU: 4956  
 6000K    4500K    3000K

50m-Roll



INPUT CABLE + CONNECTOR  
SKU: 6546



FIX CLIP  
SKU: 6547



END CAP FOR COB  
SKU: 6548




**LENS LED Module 1.6W - 220V**  
**3x2835 SMD - Waterproof**
  
100  
Lumens


  
IP67

Product code	M0220-A1	LED Qty	3 pcs
Type LED	SMD 2835	Material	PC
Power/Module	1.2W	Beam Angle	160°
Voltage	AC: 220-265V	IP Rating	IP67
Flux/Watt	84lm/W	Dimension	88x22x11mm

SKU: 4564 White Light 6500K

  
3  
Years  
Warranty

**LED Module 2.4W**  
**4x2835 SMD - Waterproof**
  
85  
Lumens


  
IP65

Product code	M02835-A1	LED Qty	4 pcs
Type LED	SMD 2835	Material	PC
Power/Module	2.4W	Beam Angle	160°
Voltage	DC: 12V	IP Rating	IP65
Flux/Watt	35lm/W	Dimension	43x38x6.5mm

SKU: 4561 White Light 6500K 3800156645615

SKU: 4562 Warm White 3000K 3800156645622

  
3  
Years  
Warranty

**LENS LED Module 0.72W**  
**3x2835 SMD - Waterproof**
  
80  
Lumens


  
IP65

Product code	M02835-A1	LED Qty	3 pcs
Type LED	SMD 2835	Material	PC
Power/Module	0.72W	Beam Angle	160°
Voltage	DC: 12V	IP Rating	IP65
Flux/Watt	110lm/W	Dimension	58x12mm

 SKU: 4512 White Light 10000K  
 SKU: 4511 White Light 6500K  
 SKU: 4513 Warm White 3000K  
 SKU: 4514 RED   
 SKU: 4516 GREEN   
 SKU: 4515 BLUE 


  
3  
Years  
Warranty

**LENS LED Module 0.72W**  
**3x5050 SMD - Waterproof**
  
85  
Lumens


  
IP65

Product code	M05050-A1	LED Qty	3 pcs
Type LED	SMD 5050	Material	PC
Power/Module	0.72W	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP65
Flux/Watt	118lm/W	Dimension	70x16x8mm

SKU: 4563 RGB

  
3  
Years  
Warranty

**LENS LED Module 1.5W**  
**3x2835 SMD - Waterproof**
  
120  
Lumens


  
IP65

Product code	M02835-A1	LED Qty	3 pcs
Type LED	SMD 2835	Material	PC
Power/Module	1.5W	Beam Angle	160°
Voltage	DC: 12V	IP Rating	IP65
Flux/Watt	80lm/W	Dimension	75x15mm

 SKU: 4522 White Light 10000K  
 SKU: 4521 White Light 6500K  
 SKU: 4523 Warm White 3000K  
 SKU: 4524 RED   
 SKU: 4526 GREEN   
 SKU: 4525 BLUE 


  
3  
Years  
Warranty

**LED Module 0.36W**  
**3x3014 SMD - Waterproof**
  
30  
Lumens


  
IP65

Product code	M03014-A1	LED Qty	3 pcs
Type LED	SMD 3014	Material	PC
Power/Module	0.36W	Beam Angle	120°
Voltage	DC: 12V	IP Rating	IP65
Flux/Watt	85lm/W	Dimension	18x8x2.9mm

 SKU: 4531 White Light 6500K  
 SKU: 4532 Warm White 3000K  
 SKU: 4533 RED   
 SKU: 4535 GREEN   
 SKU: 4534 BLUE 


  
3  
Years  
Warranty



## LED POWER SUPPLIES



Our portfolio covers best-performing all world-wide LVD power standards including narrow-body for installation ease in tricky spaces. Cost-efficient on your utility bills and your maintenance budget.

#### Features:

- 5V, 12V and 24V units come in a choice of sizes and shapes
- Specialized dimmable products for panels and downlights
- Waterproof options available with various degree of ingress-protection ratings
- Extended life cycle through forced heat dissipation, making them utmost reliable

#### Application:

- The natural choice for each LED strip design and installation
- A vital part of any lighting application



**NEW**
**DIN RAIL Power Supply**  
**12V Output**  
**Metal**

 SKU: 6275 75W - 12V  
 SKU: 6277 120W - 12V  
 SKU: 6279 240W - 12V

Watts	75W	120W	240W
Input Voltage	100-240Vac	100-240Vac	100-240Vac
Output Voltage	DC: 12V	DC: 12V	DC: 12V
Current	6.25A	10A	20A
Dimension	32x125.2x102mm	40x125.2x113.5mm	63x125.2x113.5mm

**NEW**
**Ultra Slim DIN RAIL Power Supply**  
**12V Output**  
**Plastic**

 SKU: 6265 60W - 12V  
 SKU: 6267 100W - 12V

Watts	60W	100W
Input Voltage	85-264Vac	85-264Vac
Output Voltage	DC: 12V	DC: 12V
Current	5A	8.33A
Dimension	52.5x90x54.5mm	70x90x54.5mm

**DIN RAIL Power Supply**  
**24V Output**  
**Metal**

 SKU: 6276 75W - 24V  
 SKU: 6278 120W - 24V  
 SKU: 6280 240W - 24V

Watts	75W	120W	240W
Input Voltage	100-240Vac	100-240Vac	100-240Vac
Output Voltage	DC: 24V	DC: 24V	DC: 24V
Current	3.125A	5A	10A
Dimension	32x125.2x102mm	40x125.2x113.5mm	63x125.2x113.5mm

**Ultra Slim DIN RAIL Power Supply**  
**24V Output**  
**Plastic**

 SKU: 6266 60W - 24V  
 SKU: 6268 100W - 24V

Watts	60W	100W
Input Voltage	85-264Vac	85-264Vac
Output Voltage	DC: 24V	DC: 24V
Current	2.5A	4.16A
Dimension	52.5x90x54.5mm	70x90x54.5mm



Dimmable





**TRIAC Dimmable Power Supplies**  
**Metal 12V Output**
**3**  
 Years  
 Warranty


  
 DC:12V


  
 IP20

 SKU: 6271 75W - 12V  
 SKU: 6272 100W - 12V  
 SKU: 6273 150W - 12V

Watts	75W	100W	150W
Input Voltage	220-240V	220-240V	220-240V
Output Voltage	DC: 12V	DC: 12V	DC: 12V
Current	6.25A	8.33A	12.5A
Material	Metal	Metal	Metal
IP Rating	IP20	IP20	IP20
Dimension	190x50x31mm	206x67x37mm	206x67x37mm





**TRIAC Dimmable Power Supplies**  
**Metal 24V Output**
**3**  
 Years  
 Warranty


  
 DC:24V


  
 IP20

 SKU: 6281 75W - 24V  
 SKU: 6282 100W - 24V  
 SKU: 6283 150W - 24V

Watts	75W	100W	150W
Input Voltage	220-240V	220-240V	220-240V
Output Voltage	DC: 24V	DC: 24V	DC: 24V
Current	3.1A	4.17A	6.25A
Material	Metal	Metal	Metal
IP Rating	IP20	IP20	IP20
Dimension	119x52x32mm	206x67x37mm	206x67x37mm

**NEW**

SKU: 6299 Wire Cable

**LED SUPER SLIM Power Supplies**  
**Plastic 12V Output**
  
 DC:12V


  
 IP20

 SKU: 6291 24W - 12V  
 SKU: 6292 36W - 12V  
 SKU: 6293 60W - 12V  
 SKU: 6294 100W - 12V

Watts	24W	36W	60W	100W
Input Voltage	175-265V	175-265V	175-265V	175-265V
Output Voltage	DC: 12V	DC: 12V	DC: 12V	DC: 12V
Current	2A	3A	5A	8.3A
Dimension	117x55x18.5mm	137x55x18.5mm	169x59x20mm	198x59x20mm


**Power Supplies for Track Light**  
**Metal 48V Output**
  
 DC:48V


  
 IP20

SKU: 6284 120W - 48V

SKU: 6285 250W - 48V

Watts	120W	250W
Input Voltage	220V	220V
Output Voltage	DC: 48V	DC: 48V
Current	2.5A	5.2A
Dimension	190x90x30mm	220x120x30mm



Strip Power Supplies Premium  
**Plastic 12V Output**




**3** Years  
Warranty

DC:12V

IP20

SKU: 6201 36W - 12V  
SKU: 6202 60W - 12V  
SKU: 6203 72W - 12V

Watts	36W	60W	72W
Input Voltage	100-240V	100-240V	100-240V
Output Voltage	DC: 12V	DC: 12V	DC: 12V
Current	3A	5A	6A
Material	Plastic	Plastic	Plastic
IP Rating	IP20	IP20	IP20
Dimension	119x52x32mm	119x52x32mm	119x52x32mm



Strip Power Supplies Premium  
**SLIM - Metal 12V Output**





**3** Years  
Warranty

DC:12V

IP20

SKU: 6211 60W - 12V  
SKU: 6212 100W - 12V  
SKU: 6213 150W - 12V  
SKU: 6214 200W - 12V

Watts	60W	100W	150W	200W
Input Voltage	100-240V	100-240V	176-265V	176-265V
Output Voltage	DC: 12V	DC: 12V	DC: 12V	DC: 12V
Current	5A	8.4A	12.5A	16.7A
Material	Metal	Metal	Metal	Metal
IP Rating	IP20	IP20	IP20	IP20
Dimension	130x50x31mm	190x50x31mm	200x62x31mm	208x82x32mm



Strip Power Supplies Premium  
**Plastic 24V Output**




**3** Years  
Warranty

DC:24V

IP20

SKU: 6206 36W - 24V  
SKU: 6207 60W - 24V  
SKU: 6208 72W - 24V

Watts	36W	60W	72W
Input Voltage	100-240V	100-240V	100-240V
Output Voltage	DC: 24V	DC: 24V	DC: 24V
Current	1.5A	2.5A	3A
Material	Plastic	Plastic	Plastic
IP Rating	IP20	IP20	IP20
Dimension	119x52x32mm	119x52x32mm	119x52x32mm



Strip Power Supplies Premium  
**SLIM - Metal 24V Output**





**3** Years  
Warranty

DC:24V

IP20

SKU: 6221 60W - 24V  
SKU: 6222 100W - 24V  
SKU: 6223 150W - 24V  
SKU: 6224 200W - 24V

Watts	60W	100W	150W	200W
Input Voltage	100-240V	100-240V	176-265V	176-265V
Output Voltage	DC: 24V	DC: 24V	DC: 24V	DC: 24V
Current	2.5A	4.2A	6.25A	8.35A
Material	Metal	Metal	Metal	Metal
IP Rating	IP20	IP20	IP20	IP20
Dimension	130x50x31mm	190x50x31mm	200x60x31mm	208x82x32mm









**Strip Power Supplies Premium  
Plastic Case 12V Output**
**3**  
 Years  
 Warranty

  
 DC:12V

  
 IP20

 SKU: 6231 24W - 12V  
 SKU: 6232 36W - 12V  
 SKU: 6233 60W - 12V

Watts	24W	36W	60W
Input Voltage	100-240V	100-240V	100-240V
Output Voltage	DC: 12V	DC: 12V	DC: 12V
Current	2A	3A	5A
Material	Plastic	Plastic	Plastic
IP Rating	IP20	IP20	IP20
Dimension	120x42x28mm	140x48x30mm	155x53x30mm





**Strip Power Supplies Premium  
Plastic Case 24V Output**
**3**  
 Years  
 Warranty

  
 DC:24V

  
 IP20

 SKU: 6241 24W - 24V  
 SKU: 6242 36W - 24V  
 SKU: 6243 60W - 24V

Watts	24W	36W	60W
Input Voltage	100-240V	100-240V	100-240V
Output Voltage	DC: 24V	DC: 24V	DC: 24V
Current	1A	1.5A	2.5A
Material	Plastic	Plastic	Plastic
IP Rating	IP20	IP20	IP20
Dimension	120x42x28mm	140x48x30mm	155x53x30mm






**Strip Power Supplies Premium  
Waterproof 12V Output**
**3**  
 Years  
 Warranty

  
 DC:12V

  
 IP67

 SKU: 6251 60W - 12V  
 SKU: 6252 100W - 12V  
 SKU: 6253 150W - 12V  
 SKU: 6254 200W - 12V

Watts	60W	100W	150W	200W
Input Voltage	100-240V	100-240V	176-265V	176-265V
Output Voltage	DC: 12V	DC: 12V	DC: 12V	DC: 12V
Current	5A	8.4A	12.5A	16.7A
Material	Metal	Metal	Metal	Metal
IP Rating	IP67	IP67	IP67	IP67
Dimension	158x52x32mm	220x52x32mm	233x65x32mm	244x80x32mm






**Strip Power Supplies Premium  
Waterproof 24V Output**
**3**  
 Years  
 Warranty

  
 DC:24V

  
 IP67

 SKU: 6261 60W - 24V  
 SKU: 6262 100W - 24V  
 SKU: 6263 150W - 24V  
 SKU: 6264 200W - 24V

Watts	60W	100W	150W	200W
Input Voltage	100-240V	100-240V	176-265V	176-265V
Output Voltage	DC: 24V	DC: 24V	DC: 24V	DC: 24V
Current	2.5A	4.2A	6.25A	8.35A
Material	Metal	Metal	Metal	Metal
IP Rating	IP67	IP67	IP67	IP67
Dimension	158x52x32mm	220x52x32mm	230x65x32mm	244x80x32mm





 Strip Power Supplies  
**Plastic 12V Output**



SKU: 6120	18W - 12V
SKU: 6101	24W - 12V
SKU: 6102	36W - 12V
SKU: 6103	60W - 12V
SKU: 6119	80W - 12V

**18W**


Product Code	AC18-A1	Current	1,5A
Watts	18W	Material	Plastic
Input Voltage	220-240V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	85x50x34mm

**24W**


Product Code	AC24-A1	Current	2A
Watts	24W	Material	Plastic
Input Voltage	220-240V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	90x50x31mm

**36W**


Product Code	AC36-A1	Current	3A
Watts	36W	Material	Plastic
Input Voltage	220-240V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	124x58x32mm

**60W**

Product Code	AC60-A1	Current	5A
Watts	60W	Material	Plastic
Input Voltage	220-240V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	124x58x32mm

**80W**

Product Code	AC80-A1	Current	6.5A
Watts	80W	Material	Plastic
Input Voltage	220-240V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	136x64x40mm




## Strip Power Supplies

**Waterproof Metal 12V Output**


SKU: 6110	30W - 12V
SKU: 6111	60W - 12V
<b>NEW</b> SKU: 6113	100W - 12V
SKU: 6112	150W - 12V

**30W**


Product Code	AC30-A7	Current	2.5A
Watts	30W	Material	Aluminium
Input Voltage	220V	IP Rating	IP67
Output Voltage	DC: 12V	Dimension	221x30x34mm

**60W**


Product Code	AC60-A7	Current	5A
Watts	60W	Material	Aluminium
Input Voltage	220V	IP Rating	IP67
Output Voltage	DC: 12V	Dimension	174x67x43mm

**100W**

Product Code	AC100-A7	Current	8.3A
Watts	100W	Material	Aluminium
Input Voltage	220V	IP Rating	IP67
Output Voltage	DC: 12V	Dimension	195x45x35mm

**150W**

Product Code	AC150-A7	Current	12.5A
Watts	150W	Material	Aluminium
Input Voltage	220V	IP Rating	IP67
Output Voltage	DC: 12V	Dimension	235x50x85mm






Strip Power Supplies  
**Metal 12V Output**



- SKU: 6104 24W - 12V
- SKU: 6121 36W - 12V
- SKU: 6105 60W - 12V
- SKU: 6109 100W - 12V
- SKU: 6106 120W - 12V

Watts	24W	36W	60W	100W	120W
Input Voltage	220V	220V	220V	220V	220V
Output Voltage	DC: 12V	DC: 12V	DC: 12V	DC: 12V	DC: 12V
Current	2A	3A	5A	8.3A	10A
Material	Metal	Metal	Metal	Metal	Metal
IP Rating	IP20	IP20	IP20	IP20	IP20
Dimension	85x57x34mm	85x57x34mm	115x80x50mm	165x105x50mm	165x105x65mm




Strip Power Supplies  
**Metal 12V Output**



- SKU: 6114 150W - 12V
- SKU: 6117 250W - 12V
- SKU: 6108 360W - 12V
- SKU: 6124 500W - 12V

Watts	150W	250W	360W	500W
Input Voltage	220V	220V	220V	220V
Output Voltage	DC: 12V	DC: 12V	DC: 12V	DC: 12V
Current	12.5A	20A	30A	41.5A
Material	Metal	Metal	Metal	Metal
IP Rating	IP20	IP20	IP20	IP20
Dimension	205x100x50mm	200x115x55mm	220x115x55mm	220x115x55mm




Strip Power Supplies  
**Metal 24V Output**



- SKU: 6154 60W - 24V
- SKU: 6151 100W - 24V
- SKU: 6155 150W - 24V
- SKU: 6152 250W - 24V
- SKU: 6153 360W - 24V


**60W**

Product Code	AC60-A4	Current	2.5A
Watts	60W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	165x100x45mm




**100W**

Product Code	AC100-A4	Current	4.2A
Watts	100W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	210x100x45mm




**150W**

Product Code	AC150-A4	Current	6.25A
Watts	150W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	205x105x50mm




**250W**

Product Code	AC250-A4	Current	10.5A
Watts	250W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	200x110x50mm



**360W**

Product Code	AC360-A4	Current	15A
Watts	360W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	220x115x55mm





## Strip Power Supplies

**SLIM - Metal 12V Output**

Slim Line



DC12V




IP20


SKU: 6131	60W - 12V
SKU: 6132	100W - 12V
SKU: 6133	150W - 12V
SKU: 6134	250W - 12V
SKU: 6135	360W - 12V

**60W**


Product Code	AC60-A3	Current	5A
Watts	60W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	170x45x38mm

**100W**

Product Code	AC100-A3	Current	8.5A
Watts	100W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	190x48x38mm

**150W**


Product Code	AC150-A3	Current	12.5A
Watts	150W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	207x63x49mm

**250W**

Product Code	AC250-A3	Current	20A
Watts	250W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	230x75x45mm




With FAN

**360W**

Product Code	AC360-A3	Current	30A
Watts	360W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 12V	Dimension	230x75x45mm



With FAN



## Strip Power Supplies

**SLIM - Metal 24V Output**

Slim Line



DC:24V




IP20


SKU: 6161	60W - 24V
SKU: 6162	100W - 24V
SKU: 6163	150W - 24V
SKU: 6164	250W - 24V
SKU: 6165	360W - 24V

**60W**


Product Code	AC60-A4	Current	2.5A
Watts	60W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	170x45x40mm

**100W**

Product Code	AC100-A4	Current	4.2A
Watts	100W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	195x40x40mm

**150W**


Product Code	AC150-A4	Current	6.25A
Watts	150W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	205x65x45mm

**250W**

Product Code	AC250-A4	Current	10.5A
Watts	250W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	230x75x45mm




With FAN


**360W**

Product Code	AC360-A4	Current	15A
Watts	360W	Material	Metal
Input Voltage	220V	IP Rating	IP20
Output Voltage	DC: 24V	Dimension	230x75x45mm



With FAN



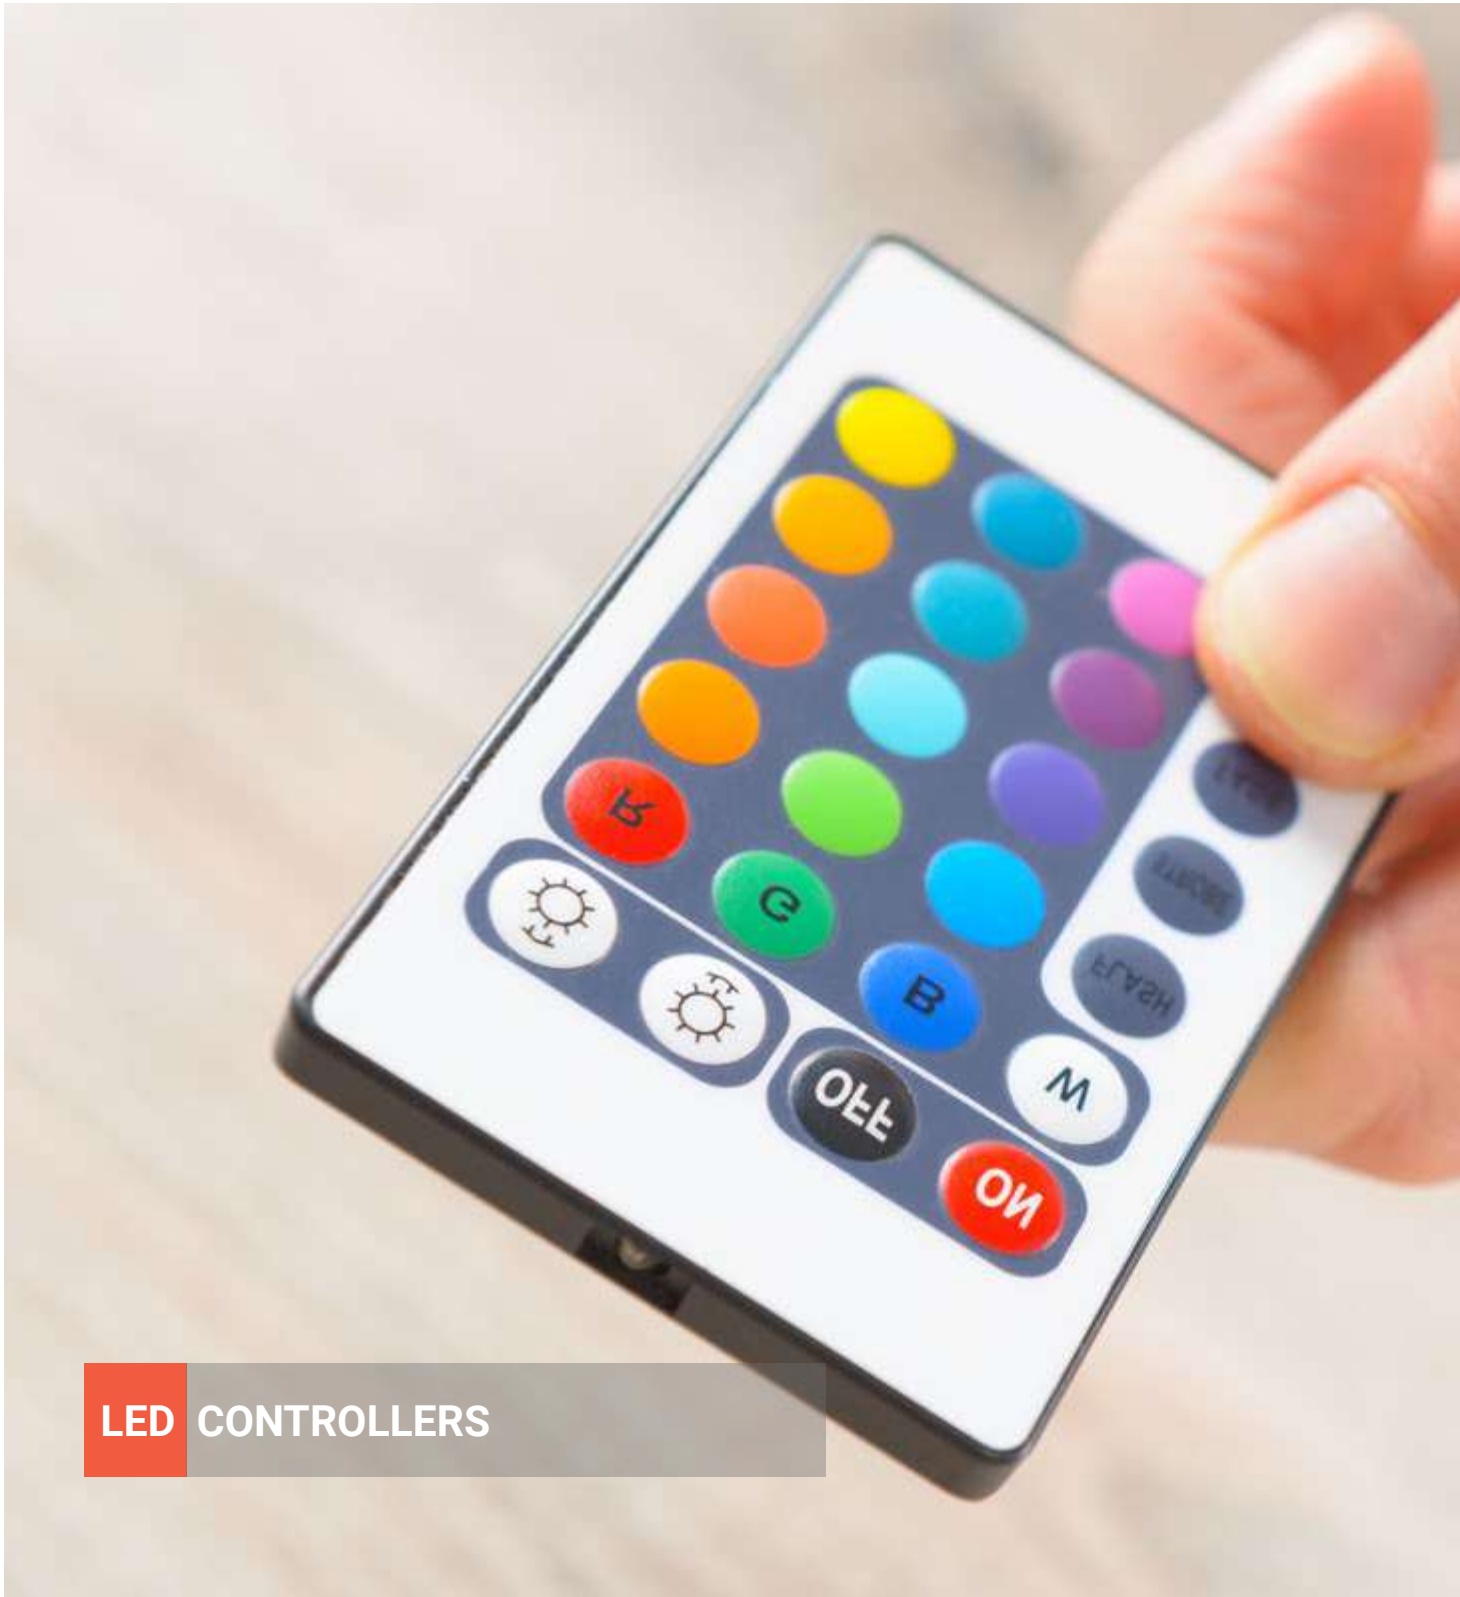

LED strips with all its power and might cannot be fully deployed without the appropriate diverse controllers. Touch sensors, Wi-Fi, smart home or any other popular type are available to diversify modern design and layout.

- Features:
- Discreet and contemporary patterns.
  - Small giants, an absolute must for any sophisticated lighting architecture
  - Plug and play concept

- Application:
- Probably the most widely used category with infinite applications

## LED CONTROLLERS


**Dimmer LED Strip  
With Remote Control 8A**

SKU:	<b>6302</b>
Product Code	AC2-A2
Power	96W-192W
Voltage	12V / 24V
IP Rating	IP20
Dimension	80x55x30mm


**WiFi Controller  
RGB / Single Color 3x4A**

SKU:	<b>6310</b>	<b>6311</b>
Product Code	AC2-A2	AC2-A2
Power	90W-288W	90W-288W
Voltage	7.5V-24V	7.5V-24V
Strip Type	RGB	Single Color
Dimension	80x55x30mm	80x55x30mm


**Remote Control LED Strip  
RGB - 4 Buttons 3x4A**

SKU:	<b>6304</b>
Product Code	AC2-A2
Power	144W-288W
Voltage	12V / 24V
IP Rating	IP20
Dimension	105x65x20mm


**Amplifier for LED Strip  
RGB - Iron Shell 3x8A**

SKU:	<b>6326</b>
Product Code	AC2-A2
Power	288W-576W
Voltage	12V-24V
IP Rating	IP20
Dimension	80x70x30mm


**Remote Control LED Strip  
RGB - 16 Buttons 3x2A**

SKU:	<b>6303</b>
Product Code	AC2-A2
Power	72W
Voltage	12V
IP Rating	IP20
Dimension	50x35x20mm


**Amplifier for LED Strip  
RGB+White 4x6A**

SKU:	<b>6328</b>
Product Code	AC2-A2
Power	288W-576W
Voltage	12V-24V
IP Rating	IP20
Dimension	65x55x20mm


**Remote Control LED Strip  
RGB - 44 Buttons**

SKU:	<b>6306</b>	<b>6307</b>
Product Code	AC2-A2	AC2-A2
Power	72W	144W
Voltage	12V	12V
IP Rating	IP20	IP20
Dimension	50x35x20mm	50x35x20mm


**Amplifier for LED Strip  
RGB 3x4A**

SKU:	<b>6305</b>
Product Code	AC2-A2
Power	144W-288W
Voltage	12V-24V
IP Rating	IP20
Dimension	80x55x20mm




**Remote Control LED Strip  
 RGB Touch White/Black 3x6A**

DC:12V/24V IP20

SKU:	6314	6315
Product Code	AC2-A2	AC2-A2
Power	216W-432W	216W-432W
Voltage	12V / 24V	12V / 24V
Body Color	White	Black
Dimension	95x50x30mm	95x50x30mm


**Sensor Dimmer  
 Wall Mounted 10A**

SKU:	6318
Product Code	AC2-A2
Power	120W-240W
Voltage	12V / 24V
Body Color	Black
Dimension	85x85x40mm



IP20


**Remote Control LED Strip  
 RGBW Touch 4x6A**

DC:12V/24V IP20

SKU:	6329
Product Code	AC2-A2
Power	288W-576W
Voltage	12V / 24V
IP Rating	IP20
Dimension	80x45x15mm


**Sensor Dimmer  
 Wall Mounted 10A**

SKU:	6320
Product Code	AC2-A2
Power	120W-240W
Voltage	12V / 24V
Body Color	White
Dimension	85x85x40mm



IP20


**Music LED Controller  
 With Remote Control 3x4A**

DC:12V/24V IP20

SKU:	6312
Product Code	AC2-A2
Power	144W-288W
Voltage	12V-24V
IP Rating	IP20
Dimension	170x85x23mm


**Sensor Dimmer  
 Wall Mounted RGB 3x4A**

SKU:	6317
Product Code	AC2-A2
Power	144W-288W
Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm



IP20


**DMX512 Decoder  
 3x4A**

DC:12V/24V IP20

SKU:	6308
Product Code	AC2-A2
Power	144W-288W
Voltage	12V-24V
IP Rating	IP20
Dimension	160x60x42mm


**Sensor Dimmer  
 Wall Mounted RGB 3x4A**

SKU:	6319
Product Code	AC2-A2
Power	144W-288W
Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm



IP20


**LED Remote Control Set  
Single Color RF 2.4G 3CH 3x4A V3**
**LED Remote**

Output signal	RF 2.4GHz
Working voltage	3VDC(CR2032)
Standby time	12 months
Remote distance	30m
Dimension	107x58.5x9mm

**LED Receiver**

Input voltage	12/24VDC
Output power	144W/288W
Output current	3CH,4A/CH
IP Rating	IP20
Dimension	97x33x18mm

SKU: 6348 *Professional series*
**LED Single Color Remote Control  
Touch - 1 Zone RF 2.4GHZ**

- \* Match with OPTONICA Professional LED Controllers.
- \* Ultra sensitive color adjustment touch slide.
- \* Each remote can match one or more receivers.
- \* Operate with LED indicator light.
- \* Magnet on the back which can be easily stuck on any metal surfaces
- \* CR2032 battery powered.

SKU: 6359 *Professional series*

IP20



Dimmable



Battery


**LED Remote Control Set  
RGB - RF 2.4G 3CH 3x4A V3**
**LED Remote**

Output signal	RF 2.4GHz
Working voltage	3VDC(CR2032)
Standby time	12 months
Remote distance	30m
Dimension	107x58.5x9mm

**LED Receiver**

Input voltage	12/24VDC
Output power	144W/288W
Output current	3CH,4A/CH
IP Rating	IP20
Dimension	97x33x18mm

SKU: 6349 *Professional series*
**LED RGB Remote Control  
Touch - 1 Zone RF 2.4GHZ**

- \* Match with OPTONICA Professional LED Controllers.
- \* Ultra sensitive color adjustment touch slide.
- \* Each remote can match one or more receivers.
- \* Operate with LED indicator light.
- \* Magnet on the back which can be easily stuck on any metal surfaces
- \* CR2032 battery powered.

SKU: 6360 *Professional series*

IP20



Dimmable



Battery


**RGB+CCT LED Strip Controller Kit  
5 channels constant voltage/Step-less dimming**


IP20

- \* 5 Channels constant voltage output for RGB+ CCT light
- \* Ultra sensitive color adjustment touch wheel
- \* Smooth dimming and switch without any flickering
- \* Built in 10 dynamic mode, include jump or gradual change style
- \* Independent dimming function of each R, G, B channel to achieve millions of colors
- \* Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance
- \* Synchronize on multiple number of controllers
- \* Light on/off fade time 3s selectable

SKU: 6387 *Professional series*
**LED RGB + CCT Remote Control  
Touch - 4 Zone RF 2.4GHZ**

- \* Match with OPTONICA Professional LED Controllers.
- \* Ultra sensitive color adjustment touch wheel.
- \* Each remote can match one or more receivers.
- \* Operate with LED indicator light.
- \* AAx2 battery powered.
- \* Dimension 122x53x17.5mm

SKU: 6368 *Professional series*

IP20



Dimmable



Battery


**Bluetooth & RF 2CH LED Controller  
2 Channels/ Push-Dim/Wireless control**


IP20

- \* Remote control or connected with external push switch to achieve on/off and dimming function
- \* Ultra sensitive brightness adjustment touch slide
- \* Smooth dimming and switch without any flickering
- \* Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance
- \* Synchronize on multiple number of controllers
- \* Light on/off fade time 3s selectable
- \* Magnet on the back which can be easily stuck on back holder or any metal surfaces

SKU: 6386 *Professional series*
**LED CCT Remote Control  
Touch - 4 Zone RF 2.4GHZ**

- \* Match with OPTONICA Professional LED Controllers.
- \* Ultra sensitive color adjustment touch wheel.
- \* Each remote can match one or more receivers.
- \* Operate with LED indicator light.
- \* AAx2 battery powered.
- \* Dimension 122x53x17.5mm

SKU: 6350 *Professional series*

IP20



Dimmable



Battery




**Wall Mounted Touch Panel**  
**4 Zone/Color wheel/AC input/DMX 512 signal**


Input Voltage	12-36VDC	Output Current	2CH,5A/CH
Input Current	10.5A	Output Power	2x(60-180)W
Output Voltage	2X(12-36)VDC	Output Type	Constant Voltage

- Used for control single color or color temperature LED strip.
- Tuya APP cloud control, support on/off, color temperature and brightness adjust, delay turn on/off light,
- Each controller can also work as Bluetooth-RF converter, then use Tuya APP to control one or more RF LED controller or RF LED dimming driver synchronously.

 SKU: 6376 Professional series

**Wall Mounted Touch Panel**  
**4 Zone/Color wheel/AC input/DMX 512 signal**


Input Voltage	12-24VDC	Output Power	2x(60-180)W
Input Current	10.5A	Output Type	Constant Voltage
Output Voltage	2X(12-36)VDC		

- Used for control single color or color temperature LED strip.
- Tuya APP cloud control, support on/off, color temperature and brightness adjust, delay turn on/off light,
- Each controller can also work as Bluetooth-RF converter, then use Tuya APP to control one or more RF LED controller or RF LED dimming driver synchronously.

 SKU: 6377 Professional series

**LED Remote Control**  
**Single Color Touch - 2.4GHZ**


- Touch panel 4 zone 1 color RF remote.
- Each zone can remote control multiple receivers, LED controller, dimming driver or smart lamp.
- Ultra sensitive high strength glass touch panel with touch color slide in the middle.
- Smooth and accurate adjustment by touching the slide.
- Touch keys with chord tones and LED indicator.
- Free installation, no wiring, removable.
- AAA x 2 battery powered.


 SKU: 6375 Professional series

**LED Remote Control**  
**RGB/RGBW Touch - 2.4GHZ**


- Touch panel 4 zone 1 color RF remote.
- Each zone can remote control multiple receivers, LED controller, dimming driver or smart lamp.
- Ultra sensitive high strength glass touch panel with touch color slide in the middle.
- Smooth and accurate adjustment by touching the slide.
- Touch keys with chord tones and LED indicator.
- Free installation, no wiring, removable.
- AAA x 2 battery powered.


 SKU: 6374 Professional series

**Ultra thin Touch Wheel RF Remote Controller**  
**4 zone RGB+CCT/Touch color wheel**


- Apply to RGB+CCT LED controller.
- Ultra sensitive color adjustment touch wheel.
- Each remote can match one or more receiver.
- CR2032 battery powered.
- Operate with LED indicator light.

 SKU: 6381 Professional series

**Desk Mount RF Remote Controller**  
**Rotary dimming/CR2032 battery**


Output signal	RF(2.4GHz)	Standby current	<10μA
Working voltage	3VDC(CR2032)	Standby time	1 year
Working current	<5mA	Remote distance	30m

- Apply to RGB LED controller.
- Rotate knob to change RGB color, color temperature or brightness, support long press or twice click operation.
- Each remote can match one or more receiver.
- CR2032 battery powered.
- Desk mount, removeable anywhere easily.

 SKU: 6379 Professional series

**RF Signal Repeater**  
**AC or DC input /Wall junction box mounting**


Input Voltage	12-36VDC ; 100-240VAC
Input/Output	RF 2.4GHz
RF Control Distance	30m

- Apply for wireless signal extension, greatly ensures RF communication stability and wide controlling area.
- Powered by AC100-240V or DC12-24V.
- Compatibility with RF 2.4G remote control.
- Easy to be placed in standard wall junction box.

 SKU: 6382 Professional series

**WiFi & RF AC Triac Dimmer**  
**Voice control/RF dimming/Push Dim**


Input Voltage	AC100-240V	Output Current	MAX 1.5A
Output Voltage	AC100-240V	Output Power	150-360W

- WiFi + RF + Push AC phase-cut dimmer, 1 channel output.
- Voice control, support amazon ECHO and TmallGenie smart speaker.
- 256 levels 0-100% dimming smoothly without any flash.
- Compatibility with RF 2.4G single zone or multiple zone dimming remote control.
- Easy to be placed in standard wall junction box behind a push switch.
- Over-heat / Over-load protection, recover automatically.

 SKU: 6388 Professional series


**Bluetooth & RF 2CH LED Controller**  
**2 Channels/Push-Dim/Wireless control**


Input Voltage	12-36VDC	Output Current	2CH,5A/CH
Input Current	10.5A	Output Power	2x(60-180)W
Output Voltage	2X(12-36)VDC	Output Type	Constant Voltage

- Used for control single color or color temperature LED strip.
- Tuya APP cloud control, support on/off, color temperature and brightness adjust, delay turn on/off light.
- Each controller can also work as Bluetooth-RF converter, then use Tuya APP to control one or more RF LED controller or RF LED dimming driver synchronously.

SKU: 6384 *Professional series*
**WiFi & RF 5 in 1 LED Controller**  
**Tuya APP cloud control/Voice control/5 Channels**


Input Voltage	12-24VDC	Output Current	5CH,3A/CH
Input Current	15.5A	Output Power	5x(36-72)W
Output Voltage	5X(12-24)VDC	Output Type	Constant Voltage

- 5 in 1 function, used for control RGB, RGBW, RGB+CCT, color temperature or single color LED strip.
- Voice control, support amazon ECHO and TmallGenie smart speaker.
- Match with RF 2.4G remote control optional.
- Light on/off fade time 3s selectable.

SKU: 6383 *Professional series*
**Constant Voltage LED Waterproof Controller**  
**4 Channels/Wireless remote control/Synchronize**


Input Voltage	12-36VDC	Output Current	4CH,5A/CH
Input Current	20.5A	Output Power	4x(60-180)W
Output Voltage	4X(12-36)VDC	Output Type	Constant Voltage

- When using with RGB/RGBW light, built in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance.
- Synchronize on multiple number of controllers.
- Fade in and out effect selectable.

SKU: 6380 *Professional series*
**Constant Voltage Waterproof Power Repeater**  
**4 Channel/PWM signal input**


Input Voltage	12-36VDC	Output Current	4CH,5A/CH
Input Current	20.5A	Output Power	4x(60-180)W
Output Voltage	4X(12-36)VDC	Output Type	Constant Voltage

- Waterproof 12-36V constant voltage power repeater with IP67 rating, suitable for outdoor and damp environment.
- 4 channel, 5A per channel.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to single color, dual color, RGB or RGBW constant voltage LED strip or module.

SKU: 6395 *Professional series*
**6 Channel DMX Sliding Fader Console**  
**6 Sliding Faders / Real DMX Value LED Screen**


Ideal Cost Efficient 6 Channel Mini DMX Fader Console

- Easy Usage
- Suitable for permanent installations by using available brackets
- Ideal for Sample Testing and Trouble-Shooting on-site or workshops
- Powered by 3 x AAA Batteries or external 5-12V Power-Supply
- 3 Digit LED Screen 0-100% or DMX000-DMX255 (Settings by internal DIP-Switch)
- 6 Channel Mode or 5 Channel & Master Mode (Settings by internal DIP-Switch)

SKU: 6392 *Professional series*
**Constant Voltage DMX512 & RDM Decoder**  
**Linear or logarithmic dimming/Numeric display**


Comply with the DMX512 standard protocols.

- Digital numeric display, set DMX decode start address by buttons.
- RDM function can realize intercommunication between DMX decoder address can be set by DMX master console.
- 1/2/4 DMX channel output selectable.
- 16bit (65536 levels) /8bit (256 levels) grey level selectable.
- Stand-alone RGB/RGBW mode and 4 channel dimmer mode selectable, which be controlled by buttons with built-in programs, instead of DMX signal.

SKU: 6390 *Professional series*
**4 Ways DMX Signal Splitter**  
**DMX512-A compatible**


- One DMX512 signal input, repeat four DMX512 signal output, each allowing for 32 DMX devices to be connected.
- Dedicated to amplify, distribute and insulate the signal that comes from the lighting system equipment when it is connected to the bus of DMX512(or RS-485).
- Input isolated from outputs to 500VAC, 1000VDC.
- Outputs are isolated from each other to 500VAC, 1000VDC.
- Input and outputs are ture RS-485 rated, and no microprocessors are used for maximum reliability.

SKU: 6391 *Professional series*
**Constant Voltage Power Repeater**  
**5 Channel/PWM signal input/Constant voltage**


- 12-24V constant voltage power repeater.
- 5 channel, 5A per channel.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to RGB+CCT constant voltage LED strip or module.

SKU: 6396 *Professional series*


**Constant Voltage Power Repeater**  
**1 Channel/PWM signal input**


IP20

Input Voltage	12-24VDC	Output Current	15A
Input Current	15.5A	Output Power	180-360W
Output Voltage	12-36VDC	Output Type	Constant Voltage

- 12-24V constant voltage power repeater.
- one channel, 15A.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to single color constant voltage LED strip or module.

SKU: 6393 Professional series
**12-60V Constant Voltage Power Repeater**  
**4 Channel/12-60V/PWM signal input**


IP20

Input Voltage	12-60VDC	Output Current	4CH,5A/CH
Input Current	20A	Output Power	4x(60-300)W
Output Voltage	4X(12-60)VDC	Output Type	Constant Voltage

- 12-60V constant voltage power repeater.
- 3/4 channel, 5A max. per channel.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to single color, dual color, RGB or RGBW constant voltage LED strip or module.

SKU: 6394 Professional series
**Dimming High Voltage LED Strip Controller**  
**3 Channels/Step-less dimming/Wireless control**


IP20

Input Voltage	110-240VAC	Output Current	3CH,1A/CH
Input Current	3.2A	Output Power	3x(110-240)W
Output Voltage	3X(110-240)VDC		

- 3 channel high voltage LED strip RF 2.4G controller
- Match with RF 2.4G single zone or multiple zone single color, dual color and RGB/RGBW remote control.
- One RF controller accept up to 10 remote control.
- When using with RGB light, built in 10 dynamic mode, include jump or gradual change style.

SKU: 6397 Professional series
**PIR Sensor Stair Light Controller**
**PIR sensor/Daylight Sensor/Max 32 step**


IP20

Input Voltage	5-24VDC	Output Current	32CH,1A/CH
Output Voltage	32 x (5-24)VDC	Output Power	32 x (5-24)W
Output Type	Constant Voltage+SPI(TTL)		

- Multiple function PIR sensor stair light controller with daylight sensor.
- 32 channels constant voltage output drive low voltage LED strip, Max. 1A
- Built-in multiple color mode, speed and brightness 1-8 grade adjustable.
- Push switch can also be as induction signal input.
- With fast self-testing function.
- Any damaged LED channel in 32 channels can be set disable.

SKU: 6385 Professional series
**RGB LED Mini Controller without remote**
**3 channel constant voltage/Max 4.5A output**


IP20

Input Voltage	12-24VDC	Output Current	3CH,1.5A/CH
Output Voltage	12-24VDC	Output Type	Constant Voltage

- 3 channel constant voltage RGB LED mini controller.
- 3 key operation with on/off, mode and color adjustment.
- 1.5A per channel, output connect with 5 meters RGB LED strip.
- 256 levels 0-100% dimming smoothly without any flash.
- Built in 10 dynamic mode, include jump or gradual change style.

SKU: 6378 Professional series
**DMX512 /0-10V to Triac Dimmer**
**RDM/Stand-alone function/Numeric display/**


IP20

Input Voltage	100-240VAC	Output Current	1CH,6A/CH
Output Voltage	100-240VAC	Output Power	600-1440)W

- AC phase-cut mosfet dimmer with DMX512 function, one channel output.
- Comply with the DMX512 standard protocols.
- Digital numeric display, set DMX decode start address by buttons.
- Reverse-phase dimming or forward-phase dimming selectable.
- Minimum brightness set from 1% to 40%.
- Stand-alone dynamic mode and dimmer mode selectable, which be controlled by buttons with built-in programs, instead of DMX signal.

SKU: 6389 Professional series
**3CH High voltage DMX512 Decoder**
**RDM/Stand-alone function/Numeric display/**


IP20

Input Voltage	100-240VAC	Output Current	3CH,1.5A/CH
Output Voltage	100-240VAC	Output Power	3x(165-360)W

- Comply with the DMX512 standard protocols.
- Digital numeric display, set DMX decode start address by buttons.
- RDM function can realize intercommunication between DMX master and decoder
- 1/3 DMX channel output selectable.
- PWM frequency 1000/2000/4000/8000Hz selectable.
- Logarithmic or linear dimming curve selectable.
- Match with RF 2.4G single zone or multiple zone RGB remote control optional.

SKU: 6330 Professional series
**NEW**



 Wall mounted holder for 6345  
 SKU: 6347

**LED RGB/RGBW Remote Control**  
**4 Zone RF 2.4GHZ**
*Professional series*

- \* Match with OPTONICA Professional LED Controllers.
- \* Ultra sensitive color adjustment touch wheel.
- \* Each remote can match one or more receivers.
- \* Operate with LED indicator light.
- \* AAAx2 battery powered.
- \* Dimension 122x53x17.5mm

SKU: 6345



IP20



Dimmable



Battery


 Remote Holder  
 for all remotes  
 SKU: 6334

**LED RGB/RGBW Remote Control**  
**4 Zone RF 2.4GHZ**
*Professional series*

- \* Match with OPTONICA Professional LED Controllers.
- \* Ultra sensitive color adjustment touch wheel.
- \* Each remote can match one or more receivers.
- \* Slim and light
- \* CR2032 battery powered.
- \* Dimension 107x58.5x9mm

SKU: 6335



IP20



Dimmable



Battery


 Wall mounted holder for 6341  
 SKU: 6346

**LED Remote Control**  
**4 Zone Single Color RF 2.4GHZ**
*Professional series*

- \* Match with OPTONICA Professional LED Controllers.
- \* Each remote can match one or more receivers.
- \* Slim and light
- \* IP20
- \* CR2032 battery powered.
- \* Dimension 135x40x11mm

SKU: 6341



IP20



Dimmable



Battery


 Wall mounted holder for 6340  
 SKU: 6346

**LED Remote Control**  
**1 Zone CCT RF 2.4GHZ**
*Professional series*

- \* Match with OPTONICA Professional LED Controllers.
- \* Each remote can match one or more receivers.
- \* Slim and light.
- \* IP20
- \* CR2032 battery powered.
- \* Dimension 107x58.5x9mm

SKU: 6340



IP20



Dimmable



Battery


**LED Controller**  
**3 Channel x 4A**
*Professional series*

SKU:	<b>6353</b>	Output Voltage	3X(12-24)VDC
Product Code	AC2-A3	Output Current	3CH,4A/CH
Input Voltage	12-24VDC	Output Power	144/288W
Input Current	12.5A	Output Type	Constant Voltage
Input Signal	RF2.4Ghz	Dimension	96x33x17 mm

- \* Match with OPTONICA Professional Series Remote Controls.
- \* One RF controller accept up to 10 remote control.
- \* Build in 10 dynamic mode, include jump or gradual change style.
- \* Auto-transmitting function: Controller automatically transmit signal of another controller with 30m control distance.
- \*Synchronize on multiple number of controllers.



IP20


**LED Controller**  
**4 Channel x 5A**
*Professional series*

SKU:	<b>6342</b>	Output Voltage	4x(12-36)VDC
Product Code	AC2-A3	Output Current	4CH,5A/CH
Input Voltage	12-36VDC	Output Power	4x(60-180)W
Input Current	20.5A	Output Type	Constant Voltage
Input Signal	RF2.4Ghz+Push	Dimension	175x45x27 mm

- \* Match with OPTONICA Professional Series Remote Controls.
- \* One RF controller accept up to 10 remote control.
- \* Build in 10 dynamic mode, include jump or gradual change style.
- \* Auto-transmitting function: Controller automatically transmit signal of another controller with 30m control distance.
- \*Synchronize on multiple number of controllers.
- \*Connect with external push switch to achive on/off and dimming function.



IP20


**LED Controller**  
**4 Channel x 300mA Constant Current**
*Professional series*

SKU:	<b>6343</b>	Output Voltage	4x(12-48)VDC
Product Code	AC2-A3	Output Current	4CH,300mA/CH
Input Voltage	12-48VDC	Output Power	4x(3.6-14.4)W
Input Current	1.5A	Output Type	Constant Current
Input Signal	RF2.4Ghz+Push	Dimension	175x45x27 mm

- \* Match with OPTONICA Professional Series Remote Controls.
- \* One RF controller accept up to 10 remote control.
- \* Build in 10 dynamic mode, include jump or gradual change style.
- \* Auto-transmitting function: Controller automatically transmit signal of another controller with 30m control distance.
- \*Synchronize on multiple number of controllers.
- \*Connect with external push switch to achive on/off and dimming function.



IP20


**Smart Wifi-BLE Music Controller  
IR 44 Keys RGB**

Input Voltage DC12-24V  
 Output 3 Channels  
 Output Current 2A (each channel)  
 Output Power 12V-72W ; 24V-144W  
 Dimension 70x30x15 mm

\* Support remote/ local control through 2G / 3G /4G / Wi-Fi networks.

SKU: 6336



IP20



Dimmable



Battery


**Smart Wifi-BLE Controller  
IR 24 Keys RGB CCT**

Input Voltage DC12-24V  
 Output 5 Channels  
 Output Current 1A (each channel)  
 Output Power 12V-60W ; 24V-120W  
 Dimension 70x30x15 mm

\* Support remote/ local control through 2G / 3G /4G / Wi-Fi networks.

SKU: 6337



IP20



Dimmable



Battery


**Smart Wifi-BLE Controller  
IR 14 Keys CCT**

Input Voltage DC12-24V  
 Output 2 Channels  
 Output Current 2A (each channel)  
 Output Power 12V-48W ; 24V-96W  
 Dimension 70x30x15 mm

\* Support remote/ local control through 2G / 3G /4G / Wi-Fi networks.

SKU: 6338



IP20



Dimmable



Battery


**LED Controller  
IR 40 Keys RGBW**

Input Voltage DC12-24V  
 Output 4 Channels  
 Output Current 2A (each channel)  
 Output Power 12V-96W ; 24V-192W  
 Dimension 70x30x15 mm

\* Support remote/ local control through 2G / 3G /4G / Wi-Fi networks.

SKU: 6339



IP20



Dimmable



Battery


**LED Controller  
1 Channel x 8A**

Professional series

SKU: 6321  
 Product Code AC2-A3  
 Input Voltage 12-24VDC  
 Input Current 8A  
 Output Voltage 1X(12-24)VDC  
 Output Current 8A/CH  
 Output Power 96/384W  
 Output Type Constant Voltage  
 Dimension 97x33x18 mm

\* Match with OPTONICA Professional Series Remote Controls.  
 \* Fade-in Fade-out LED dimmer with smooth fading effect for soft start and stop  
 \* The fading speed can be set via knob potentiometer, 1S, 3S, 5S, 10S, 20S selectable.  
 \* Connect with self-resetting metal button or push switch to achieve on/off and 0-100% dimming function.  
 \* Push input can accept either positive or negative trigger.



IP20


**LED Controller  
1 Channel x 8A**

Professional series

SKU: 6322  
 Product Code AC2-A3  
 Input Voltage 5-36VDC  
 Input Current 8.5A  
 Output Voltage 1X(5-36)VDC  
 Output Current 1CH,8A  
 Output Power 40W/96W/192W/288W  
 Output Type Constant Voltage  
 Dimension 97x33x18 mm

\* 4096 levels 0-100% dimming smoothly without any fash.  
 \* One RF controller accept up to 10 remote control.  
 \* Match with RF 2.4G single zone or multiple zone dimming remote control.  
 \* Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance.  
 \* Synchronize on multiple number of controllers.



IP20


**LED Controller  
1 Channel x 8A**

Professional series

SKU: 6352  
 Input Voltage 5-25VDC  
 Input Current 8A  
 Input Signal Tuya App + RF 2.4Ghz  
 Output Signal SPI(TTL)x2  
 Dimension 120x43x27 mm

\* Multi-pixel RGB/RGBW LED strip controller with SPI signal output, Tuya APP cloud control.  
 \* Voice control, support for Amazon ECHO, Google, Tmall Genie and Xiaodu smart speakers.  
 \* Compatible with 45 kinds of RGB or RGBW LED strips.  
 \* Rich dynamic effects: 44 default and 10+ custom dynamic scenarios, 16 variations.  
 \* Match with RF 2.4G RGB remote control.



IP20

## DMX512 &amp; RDM Decoder

**4 Channel x 5A**

Professional series



IP20

SKU:	<b>6364</b>	Output Voltage	12-24VDC
Product Code	AC2-A3	Output Current	4CH,5A/CH
Input Voltage	12-24VDC	Output Power	4x(60-120)W
Input Current	20.5A	Output Type	Constant Voltage
IP Rating	IP20	Dimension	170x50x24 mm

- \* Match with OPTONICA Professional Series Remote Controls.
- \* Comply with the DMX512 standard protocols.
- \* Digital numeric display, set DMX address by buttons.
- \* RDM function can realize intercommunication between DMX master and decoder.
- \* 1/2/4 DMX channel output selectable.
- \* Stand-alone RGB/RGBW mode and 4 channel dimmer mode selectable.



## LED Controller

**5 Channel x 5A**

Professional series



IP20

SKU:	<b>6366</b>	Output Voltage	5x(12-24)VDC
Product Code	AC2-A3	Output Current	5CH,5A/CH
Input Voltage	12-24VDC	Output Power	5x(60-120)W
Input Current	25.5A	Output Type	Constant Voltage
IP Rating	IP20	Dimension	175x45x27 mm

- \* Match with OPTONICA Professional Series Remote Controls.
- \* One RF controller accept up to 10 remote control.
- \* Build in 10 dynamic mode, include jump or gradual change style.
- \* Auto-transmitting function: Controller automatically transmit signal of another controller with 30m control distance.
- \* Synchronize on multiple number of controllers.
- \* Connect with external push switch to achieve on/off and dimming function.



## LED Dimmer

**1 Channel 12A**

Professional series



IP20

SKU:	<b>6367</b>	Output Voltage	12-36VDC
Product Code	AC2-A3	Output Current	1CH,12A
Input Voltage	12-36VDC	Output Power	144-432W
Input Current	12.5A	Output Type	Constant Voltage
Input Signal	0/1-10V+Push	Dimension	175x45x27 mm

- \* Match with OPTONICA Professional Series Remote Controls.
- \* 1 channel 0/1-10V LED dimming driver with push-dim function.
- \* 1 channel 0/1-10V input, 1 channel PWM constant voltage output.
- \* 0~100% dimming range via logarithmic characteristic can be very comfortable for human eyes.



## LED Dimmer

**4 Channel x 5A**

Professional series



IP20

SKU:	<b>6369</b>	Output Voltage	12-36VDC
Product Code	AC2-A3	Output Current	4CH,5A/CH
Input Voltage	12-36VDC	Output Power	4x(60-180)W
Input Current	20.5A	Output Type	Constant Voltage
Input Signal	0/1-10V+Push	Dimension	175x45x27 mm

- \* Match with OPTONICA Professional Series Remote Controls.
- \* 4 channel 0/1-10V LED dimming driver with push-dim function.
- \* 4 channel 0/1-10V input, 4 channel PWM constant voltage output.
- \* 0~100% dimming range via logarithmic characteristic can be very comfortable for human eyes.



## DALI LED Dimmer

**1 Channel 15A**

Professional series



IP20

SKU:	<b>6371</b>	Output Voltage	12-24VDC
Product Code	AC2-A3	Output Current	1CH,15A
Input Voltage	12-24VDC	Output Power	180W/360W
Input Current	15A	Output Type	Constant Voltage
Input Signal	DALI+Push	Dimension	175x45x27 mm

- \* Match with OPTONICA Professional Series Remote Controls.
- \* Constant voltage DALI LED dimmer with 1 channel, 15A output.
- \* DALI address will be automatically assigned by DALI master, 1 DALI address.
- \* PWM digital dimming, standard DALI logarithmic dimming curve.
- \* Connect with external push switch to achieve on/off and dimming function.



## DALI LED Dimmer

**4 Channel x 5A**

Professional series



IP20

SKU:	<b>6372</b>	Output Voltage	12-24VDC
Product Code	AC2-A3	Output Current	4CH,5A/CH
Input Voltage	12-24VDC	Output Power	4x(60-120)W
Input Current	20.5A	Output Type	Constant Voltage
Input Signal	DALI	Dimension	175x45x27 mm

- \* Match with OPTONICA Professional Series Remote Controls.
- \* 4 channel constant voltage DALI LED Dimmer, 5A per channel.
- \* 4 DALI address, 4 channel work separately.
- \* DALI address will be automatically assigned by DALI master.
- \* PWM digital dimming, standard DALI logarithmic dimming curve.

**NEW**

## AC Triac DALI Dimmer

Professional series



IP20

SKU:	<b>16302</b>	Output Voltage	AC100-240V
Product Code	AC2-A3	Output Current	Max 1.5A
Input Voltage	AC100-240V	Output Power	150-360W
Dimming level	256 levels	Dimension	190x48x25 mm

- \* AC phase-cut DALI dimmer, one DALI address, one channel output.
- \* DALI address can be manually assigned and shown in digital display or automatically assigned by DALI master.
- \* Reverse-phase dimming or forward-phase dimming selectable.
- \* To dim and switch single color dimmable LED lamps, traditional incandescent and halogen lights.



## LED Controller

Professional series



SKU:	<b>6355</b>	Output Voltage	4x(12-24)VDC
Product Code	AC2-A3	Output Current	4CH,5A/CH
Input Voltage	12-24VDC	Output Power	4x(60-120)W
Input Current	20.5A	Output Type	Constant Voltage
IP Rating	IP20	Dimension	110x64x45mm



IP20

- \* Match with OPTONICA Professional Series Remote Controls.
- \* Digital numeric display and easy key operation.
- \* Can set as 1 channel dimmer, 4 channel, dual color, RGB or RGBW controller.
- \* Logarithmic or linear dimming curve selectable.
- \* Synchronize on multiple number of controllers.

## AC TRIAC Dimmer

Professional series



SKU:	<b>6365</b>	Output Voltage	100-240VAC
Product Code	AC2-A3	Output Current	1CH,2A/CH
Input Voltage	100-240VAC	Output Power	200-480W
Input Signal	RF2.4GHz+Push	Dimming level	100 levels
IP Rating	IP20	Dimension	110x64x45 mm



IP20

- \* Match with OPTONICA Professional Series Remote Controls.
- \* RF+ Push AC phase-cut dimmer, 1channel output.
- \* Digital numeric display, set brightness by buttons.
- \* 0-100% dimming smoothly without any flash.
- \* Reverse-phase dimming or forward-phase dimming selectable.
- \* Minimum brightness set from 1% to 40%

## Power Repeater

Professional series



SKU:	<b>6370</b>	Output Voltage	4x(12-24)VDC
Product Code	AC2-A3	Output Current	4CH,5A/CH
Input Voltage	12-24VDC	Output Power	4x(60-120)W
Input Current	20.5A	Output Type	Constant Voltage
IP Rating	IP20	Dimension	110x64x45 mm



IP20

- \* Match with OPTONICA Professional Series Remote Controls.
- \* To receive PWM signal control.
- \* Power repeater in series or in parallel to expand output unlimitedly.
- \* Apply to single color,dual color,RGB or RGBW constant voltage LED strip or module.
- \* 3KV Optoelectronic isolation.

## AC Triac RF Dimmer

RF 2.4GHz + Push

Professional series



SKU:	<b>6363</b>	Output Voltage	100-240VAC
Product Code	AC2-A3	Output Current	MAX 1A
Input Voltage	100-240VAC	Output Power	100-240W
Input Signal	RF2.4GHz+Push	Dimming level	256 levels
IP Rating	IP20	Dimension	56x56x26 mm



IP20

- \* Match with OPTONICA Professional Series Remote Controls.
- \* RF+ Push AC phase-cut dimmer, 1channel output.
- \* 0-100% dimming smoothly without any flash.
- \* Connect with external push switch to achieve ON/OFF and dimming function.
- \* Easy to be inserted into standard 86x86mm wall box

## LED Controller

3 Channel x 10A

Professional series



SKU:	<b>6356</b>	Output Voltage	3x(12-36)VDC
Product Code	AC2-A3	Output Current	3CH,10A/CH
Input Voltage	12-36VDC	Output Power	3x(120-360)W
Input Current	30.5A	Output Type	Constant Current
Input Signal	RF2.4GHz	Dimension	105x75x25 mm



IP20

- \* Match with OPTONICA Professional Series Remote Controls.
- \* One RF controller accept up to 10 remote control.
- \* Build in 10 dynamic mode, include jump or gradual change style.
- \* Auto-transmitting function: Controller automatically transmit signal of another controller with 30m control distance.
- \* Synchronize on multiple number of controllers.

## WiFi - Relay 2.4GHz

WiFi to RF Converter

Professional series



SKU:	<b>6354</b>	Output Control	RGB,RGBW,CT
Product Code	AC2-A3	Working Temp.	-20°C~50°C
Input Voltage	5-24VDC	Platform	iOS, Android
Wifi standard	802.11 b/g/n	Dimension	ø72x25 mm



IP20





## LED 0-10V DIMMER

## 4 Zones - Touch glass panel

Professional series



Dimmable



IP20

SKU:	6398	Output Signal	0-10V (20mA)
Input Voltage	100-240V	Output Current	20mA/CH
IP Rating	IP20	Dimension	86x86x33 mm

- \*Touch panel 0-10V dimmer, output 4 channel 0-10V signal
- \* Output connect with 0/1-10V dimmable driver.
- \* Ultra sensitive high strength glass touch panel with touch slide in the middle.
- \* Compatibility with RF 2.4G dimming remote control.
- \*Touch keys with LED indicator.



## LED 0-10V DIMMER

## 1 Channel - Rotary glass panel

Professional series



Dimmable



IP20

SKU:	6399	Output Signal	0-10V (50mA)
Input Voltage	100-240V	Output Current	1.5A
IP Rating	IP20	Dimension	86x86x48 mm

- \* Rotary glass panel 1-10V dimmer, 1 channel output.
- \* Output connect with 0/1-10V dimmable driver.
- \* Output 1 channel 1-10V signal, connect with 1-10V dimmable driver.
- \* High voltage AC input, High voltage AC relay output.
- \*Compatibility with RF 2.4G single zone or multiple zone dimming remote control.



## LED AC TRIAC DIMMER

## 1 Channel - Rotary glass panel

Professional series



Dimmable



IP20

SKU:	6351	Output Power	150-360W
I/O Voltage	100-240V	Output Current	Max 1.5A
IP Rating	IP20	Dimension	86x86x48 mm

- \* Rotary glass panel AC phase-cut dimmer, 1 channel output.
- \* To dim and switch single color dimmable LED lamps, traditional incandescent and halogen lights.
- \* 256 levels 0-100% dimming smoothly without any flash.
- \* Leading edge dimming or trailing edge dimming set by dip switch.
- \* Over-heat / Over-load protection, recover automatically.



## LED Single Color Controller

## 4A\*3CH

Professional series



Dimmable



IP20

SKU:	6357	Output Voltage	3x(12-24)VDC
Product Code	AC2-A3	Output Current	3CH,4A/CH
Input Voltage	12-24VDC	Output Power	144-288W
Input Current	12.5A	Output Type	Constant Voltage
IP Rating	IP20	Dimension	86x86x53 mm



## LED RGB Controller

## 4A\*3CH

Professional series



Dimmable



IP20

SKU:	6358	Output Voltage	3x(12-24)VDC
Product Code	AC2-A3	Output Current	3CH,4A/CH
Input Voltage	12-24VDC	Output Power	144-288W
Input Current	12.5A	Output Type	Constant Voltage
IP Rating	IP20	Dimension	86x86x53 mm



## LED DMX Controller

## 4 Zones control DMX512+RF 2.4G

Professional series



Dimmable



IP20

SKU:	6361	Control Mode	4 Zone Control
Product Code	AC2-A3	Light Type	Single Color
Input Voltage	85-265V	Remote Distance	30m
Output Signal	DMX512+RF	Working Temp.	-20°C/+50°C
IP Rating	IP20	Dimension	86x86x36 mm



## LED RGBW DMX Controller

## 4 Zones control DMX512+RF 2.4G

Professional series



Dimmable



IP20

SKU:	6362	Control Mode	4 Zone Control
Product Code	AC2-A3	Light Type	RGBW
Input Voltage	85-265V	Remote Distance	30m
Output Signal	DMX512+RF	Working Temp.	-20°C/+50°C
IP Rating	IP20	Dimension	86x86x36 mm





Highly specialized luminaires with concentrated light distribution angle intended for retail or other spot required presentation area. These adjustable fixtures can be combined with variously lengthen three phased tracks along with connectors to suit every design, including rapid solutions for trade fair halls and shopping malls.

**Features:**

- Three colour temperatures offered to match the needs of most commercial shelf products
- Upto 80% cost-saving use
- Quick and easy fool proof on and off installation

**Application:**

- Indoor use
- Any show-room, art gallery, dining rooms companions.
- Popular choice for both residential and commercial projects.




**LED Linear Suspended Light  
40W Slim Linkable**

**5**  
Years  
Warranty


Linkable

Product code	LN40-A3	CRI	Ra>80
Watts	40W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1185x60x70 mm
Flux	4000lm	Body Color	BLACK
Beam Angle	120°	Dimmable	NO

 SKU: 5470    SKU: 5380  
 6000K     4000K

**LED Linear L-Shape Connector  
10W Slim Linkable**

**5**  
Years  
Warranty

Product code	LN10-A3	CRI	Ra>80
Watts	10W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	176x176x70 mm
Flux	1000lm	Body Shape	L-Shape
Beam Angle	120°	Dimmable	NO


 White Light     6000K    Neutral White     4000K  
 SKU: 5060     Black Body     SKU: 5027     Black Body  
 SKU: 5061     Silver Body     SKU: 5028     Silver Body  
 SKU: 5062     White Body     SKU: 5029     White Body

**LED Linear Suspended Light  
40W Slim Linkable**

**5**  
Years  
Warranty


Linkable

Product code	LN40-A3	CRI	Ra>80
Watts	40W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1185x60x70 mm
Flux	4000lm	Body Color	SILVER
Beam Angle	120°	Dimmable	NO

 SKU: 5471    SKU: 5381  
 6000K     4000K

**LED Linear T-Shape Connector  
15W Slim Linkable**

**5**  
Years  
Warranty

Product code	LN15-A3	CRI	Ra>80
Watts	15W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	300x176x70 mm
Flux	1500lm	Body Shape	T-Shape
Beam Angle	120°	Dimmable	NO


 White Light     6000K    Neutral White     4000K  
 SKU: 5063     Black Body     SKU: 5030     Black Body  
 SKU: 5064     Silver Body     SKU: 5036     Silver Body  
 SKU: 5065     White Body     SKU: 5037     White Body

**LED Linear Suspended Light  
40W Slim Linkable**

**5**  
Years  
Warranty


Linkable

Product code	LN40-A3	CRI	Ra>80
Watts	40W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1185x60x70 mm
Flux	4000lm	Body Color	WHITE
Beam Angle	120°	Dimmable	NO

 SKU: 5472    SKU: 5382  
 6000K     4000K

**LED Linear X-Shape Connector  
20W Slim Linkable**


**5**  
Years  
Warranty

Product code	LN20-A3	CRI	Ra>80
Watts	20W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	300x300x70 mm
Flux	2000lm	Body Shape	X-Shape
Beam Angle	120°	Dimmable	NO

 White Light     6000K    Neutral White     4000K  
 SKU: 5066     Black Body     SKU: 5038     Black Body  
 SKU: 5067     Silver Body     SKU: 5039     Silver Body  
 SKU: 5068     White Body     SKU: 5040     White Body



**LED Linear Suspended Light**  
**50W UP-DOWN**


Product code	LN50-A3	CRI	Ra>80
Watts	50W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1185x28x68 mm
Flux	5000lm	Body Color	BLACK
Beam Angle	120°	Dimmable	NO



 SKU: 5383  
 ■ 4000K

**LED Linear Suspended Light**  
**50W Linkable**


Product code	LN50-A4	CRI	Ra>80
Watts	50W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1200x35x67 mm
Flux	4500lm	Body Color	BLACK
Beam Angle	60°	Dimmable	NO

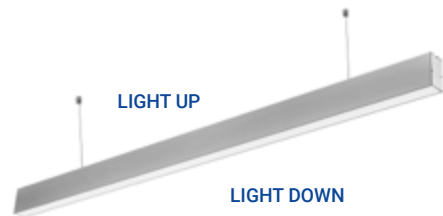
 Connector  
 SKU: 5047



 SKU: 5386  
 ■ 4000K

**LED Linear Suspended Light**  
**50W UP-DOWN**


Product code	LN50-A3	CRI	Ra>80
Watts	50W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1185x28x68 mm
Flux	5000lm	Body Color	SILVER
Beam Angle	120°	Dimmable	NO



 SKU: 5384  
 ■ 4000K

**LED Linear Suspended Light**  
**50W Linkabe**

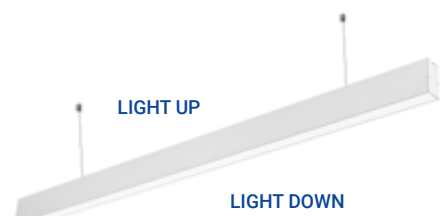
Product code	LN50-A4	CRI	Ra>80
Watts	50W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1200x35x67 mm
Flux	4500lm	Body Color	SILVER
Beam Angle	60°	Dimmable	NO


 Connector  
 SKU: 5047


 SKU: 5387  
 ■ 4000K

**LED Linear Suspended Light**  
**50W UP-DOWN**


Product code	LN50-A3	CRI	Ra>80
Watts	50W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1185x28x68 mm
Flux	5000lm	Body Color	WHITE
Beam Angle	120°	Dimmable	NO


 SKU: 5385  
 ■ 4000K

**LED Linear Suspended Light**  
**50W Linkable**


Product code	LN50-A4	CRI	Ra>80
Watts	50W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1200x35x67 mm
Flux	4500lm	Body Color	WHITE
Beam Angle	60°	Dimmable	NO


 Connector  
 SKU: 5047

 SKU: 5388  
 ■ 4000K





**NEW**

**LED Linear Suspended Light  
40W NON-Linkable**



Product code	LN50-A4	CRI	Ra>80
Watts	40W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1200x57x60 mm
Flux	4400lm	Body Color	BLACK
Beam Angle	120°	Dimmable	NO

SKU: 5478  
■ 4000K



**3** Years  
Warranty




**NEW**

**LED Linear Suspended Light  
40W NON-Linkable**



Product code	LN50-A4	CRI	Ra>80
Watts	40W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	1200x57x60 mm
Flux	4400lm	Body Color	BLACK
Beam Angle	120°	Dimmable	NO

SKU: 5479  
■ 4000K



**3** Years  
Warranty

**Linkable Connector for Linear Lights**  
For SKU: 5380-5382/5027-5040



SKU: 65315

**Suspension Kit for Linear Lights**



SKU: 65316




**LED COB Track Light  
25W** For 3 Phase 4 Line Tracks

**3** Years  
Warranty

**2750**  
Lumens

Product code	FL25-A1	CRI	Ra>80
Watts	25W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	ø80x145x160mm
Flux	2750lm	Body Color	WHITE
Beam Angle	24°		

SKU: 5321 ■ 5000K    SKU: 5322 ■ 4000K    SKU: 5323 ■ 3000K




**LED COB Track Light  
25W** For 3 Phase 4 Line Tracks

**3** Years  
Warranty

**2750**  
Lumens

Product code	FL25-A1	CRI	Ra>80
Watts	25W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	ø80x145x160mm
Flux	2750lm	Body Color	BLACK
Beam Angle	24°		

SKU: 5327 ■ 5000K    SKU: 5328 ■ 4000K    SKU: 5329 ■ 3000K




**LED COB Track Light  
35W** For 3 Phase 4 Line Tracks

**3** Years  
Warranty

**3850**  
Lumens

Product code	WL35-A1	CRI	Ra>80
Watts	35W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	ø90x160x160mm
Flux	3850lm	Body Color	WHITE
Beam Angle	24°		

SKU: 5324 ■ 5000K    SKU: 5325 ■ 4000K    SKU: 5326 ■ 3000K




**LED COB Track Light  
35W** For 3 Phase 4 Line Tracks

**3** Years  
Warranty

**3850**  
Lumens

Product code	WL35-A1	CRI	Ra>80
Watts	35W	IP Rating	IP20
Input Voltage	AC : 220-240V	Dimension	ø90x160x160mm
Flux	3850lm	Body Color	BLACK
Beam Angle	24°		

SKU: 5330 ■ 5000K    SKU: 5331 ■ 4000K    SKU: 5332 ■ 3000K



**NEW**



LED COB Track Light  
**12W** 1 Phase Track System




1200  
Lumens

Watts 12W  
Input Voltage AC : 220-240V  
Flux 1200lm  
Beam Angle 24°

CRI Ra>80  
IP Rating IP20  
Dimension ø50x130mm  
Body Color BLACK

SKU: 15101 4000K  
SKU: 15102 2700K



**NEW**



LED COB Track Light  
**12W** 1 Phase Track System




1200  
Lumens

Watts 12W  
Input Voltage AC : 220-240V  
Flux 1200lm  
Beam Angle 24°

CRI Ra>80  
IP Rating IP20  
Dimension ø50x130mm  
Body Color WHITE

SKU: 15103 4000K  
SKU: 15104 2700K



**NEW**



LED Track Light CCT  
**20-25-30W** Adjustable  
For 4 Line Track System



3 Years  
Warranty




2700  
Lumens

Watts 20-25-30W  
Input Voltage AC : 220-240V  
Flux 2700lm  
Beam Angle 24°-90°

CRI Ra>90  
IP Rating IP20  
Dimension ø72x210x170mm  
Body Color BLACK

SKU: 15105  
CCT  
6000K 4000K 3000K



**NEW**



LED Track Light CCT  
**20-25-30W** Adjustable  
For 4 Line Track System



3 Years  
Warranty




2700  
Lumens

Watts 20-25-30W  
Input Voltage AC : 220-240V  
Flux 2700lm  
Beam Angle 24°-90°

CRI Ra>90  
IP Rating IP20  
Dimension ø72x210x170mm  
Body Color WHITE

SKU: 15106  
CCT  
6000K 4000K 3000K



Extremely Flexible  
Free Flowing



LED Flexible Track (Colour Bridge)  
SERIES

Unlimited Combination

LED Flexible Track (Colour Bridge) DIY SET V1

SKU: 15401



2000  
Lumens  
LED Linear Light 40W



390  
Lumens  
LED Spot Light 7W - 2Pcs



Flexible Track (Black)-5m



Fixed Parts (Black)-5Pcs



MW  
Meanwell Driver -75W

LED Flexible Track (Colour Bridge) DIY SET V2

SKU: 15402



390  
Lumens  
LED Spot Light 7W - 3Pcs



Flexible Track (Black)-5m



Fixed Parts (Black)-6Pcs




MW  
Meanwell Driver -50W

LED Wall washer for Tracks  
**30W** For 3 Phase 4 Line Tracks



Product code	LN30-A3	CRI	Ra>80
Watts	30W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	610x40x90 mm
Flux	2700lm	Body Color	BLACK
Beam Angle	24°	Dimmable	NO

SKU: 5389  
4000K



5 Years  
Warranty




LED Wall washer for Tracks  
**40W** For 3 Phase 4 Line Tracks



Product code	LN40-A4	CRI	Ra>80
Watts	40W	IP Rating	IP20
Input Voltage	AC : 200-240V	Dimension	905x40x90 mm
Flux	3600lm	Body Color	BLACK
Beam Angle	24°	Dimmable	NO

SKU: 5390  
4000K



5 Years  
Warranty



ACCESSORIES FOR 3-PHASE TRACK LIGHTS



TRACK SYSTEM 3PHASES - 1M WHITE  
SKU: 5007



TRACK SYSTEM 3PHASES - 1M BLACK  
SKU: 5009



TRACK SYSTEM 3PHASES - 2M WHITE  
SKU: 5008



TRACK SYSTEM 3PHASES - 2M BLACK  
SKU: 5010



STRAIGHT CONNECTOR WHITE  
SKU: 5013



MINI STRAIGHT CONNECTOR WHITE  
SKU: 5011



T-CONNECTOR WHITE  
SKU: 5017



END CAP WHITE  
SKU: 5023



STRAIGHT CONNECTOR BLACK  
SKU: 5014



MINI STRAIGHT CONNECTOR BLACK  
SKU: 5012



T-CONNECTOR BLACK  
SKU: 5018



END CAP BLACK  
SKU: 5024

ACCESSORIES FOR TRACK LIGHTS



TRACK SYSTEM - 1M WHITE  
SKU: 5153



TRACK SYSTEM - 1M BLACK  
SKU: 5154



TRACK SYSTEM - 2M WHITE  
SKU: 5155



TRACK SYSTEM - 2M BLACK  
SKU: 5156



CONNECTOP ANGLE - WHITE  
SKU: 5157



CONNECTOP LINE - BLACK  
SKU: 5159



CONNECTOP ANGLE - WHITE  
SKU: 5158



CONNECTOP ANGLE - BLACK  
SKU: 5160



L-FEEDER WHITE  
SKU: 5019



L-CONNECTOR WHITE  
SKU: 5015



X-CONNECTOR WHITE  
SKU: 5021



FLEXIBLE CONNECTOR WHITE  
SKU: 5025



L-FEEDER BLACK  
SKU: 5020



L-CONNECTOR BLACK  
SKU: 5016



X-CONNECTOR BLACK  
SKU: 5022



FLEXIBLE CONNECTOR BLACK  
SKU: 5026

# MAGNETIC TRACK SERIES


Magnetic force connects profile and modules both mechanical and electrical.



Magnetic



IP20

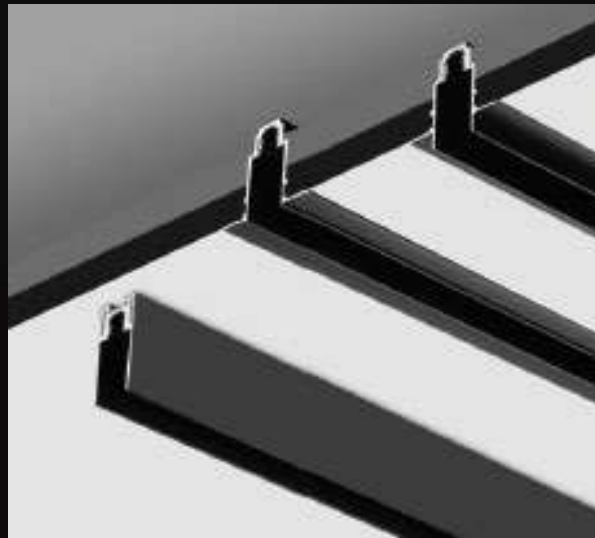

## TRACK SYSTEM 3 PHASES R35

- SKU: 5350 BLACK BODY - 1m
- SKU: 5351 BLACK BODY - 1.5m
- SKU: 5352 BLACK BODY - 2m



ANGLE CONNECTOR  
SKU: 5358



END CAP  
SKU: 5353



Magnetic



## TRACK SYSTEM 3 PHASES R35 Build-in

- SKU: 5360 BLACK BODY - 1m
- SKU: 5361 BLACK BODY - 1.5m
- SKU: 5362 BLACK BODY - 2m



ANGLE CONNECTOR  
SKU: 5363



END CAP  
SKU: 5411



Magnetic



## TRACK SYSTEM 3 PHASES R35B-Build-in

- SKU: 5420 BLACK BODY - 1m
- SKU: 5421 BLACK BODY - 1.5m
- SKU: 5422 BLACK BODY - 2m



ANGLE CONNECTOR  
SKU: 5423



END CAP  
SKU: 5411



Magnetic



## TRACK SYSTEM 3 PHASES S20

- SKU: 5364 BLACK BODY - 1m
- SKU: 5365 BLACK BODY - 1.5m
- SKU: 5366 BLACK BODY - 2m



ANGLE CONNECTOR  
SKU: 5412



END CAP  
SKU: 5413



Magnetic



## TRACK SYSTEM 3 PHASES R20 Build-In

- SKU: 5367 BLACK BODY - 1m
- SKU: 5368 BLACK BODY - 1.5m
- SKU: 5369 BLACK BODY - 2m



ANGLE CONNECTOR  
SKU: 5414



END CAP  
SKU: 5415



Magnetic



## TRACK SYSTEM 3 PHASES R20B-Build-in

- SKU: 5450 BLACK BODY - 1m
- SKU: 5451 BLACK BODY - 1.5m
- SKU: 5452 BLACK BODY - 2m



ANGLE CONNECTOR  
SKU: 5453



END CAP  
SKU: 5415



Magnetic



LED Magnetic Track Light  
**12W ; 20W**

Product code	LN12-A4 ; LN20-A4	CRI	Ra>80
Power	12W ; 20W	IP Rating	IP20
Beam Angle	120°	Dimension 12W	300x34x50mm
Voltage	DC:48V	Dimension 20W	600x34x50mm



SKU: 5340	12W 30cm	3000K
SKU: 5391	12W 30cm	4000K
SKU: 5341	20W 60cm	3000K
SKU: 5392	20W 60cm	4000K



LED Magnetic Track Light  
**10W ; 20W**

Product code	LN10-A4 ; LN20-A4	CRI	Ra>80
Power	10W ; 20W	IP Rating	IP20
Beam Angle	24°	Dimension 10W	135x34x95mm
Voltage	DC:48V	Dimension 20W	270x34x95mm



SKU: 5347	10W 13.5cm	3000K
SKU: 5398	10W 13.5cm	4000K
SKU: 5348	20W 27cm	3000K
SKU: 5399	20W 27cm	4000K



LED Magnetic Track Light  
**10W ; 20W**

Product code	LN10-A4 ; LN20-A4	CRI	Ra>80
Power	10W ; 20W	IP Rating	IP20
Beam Angle	24°	Dimension 10W	135x34x50mm
Voltage	DC:48V	Dimension 18W	270x34x50mm



SKU: 5342	10W 13.5cm	3000K
SKU: 5393	10W 13.5cm	4000K
SKU: 5343	20W 27cm	3000K
SKU: 5394	20W 27cm	4000K



LED Magnetic Track Light  
**7W Focusing Spot Light**

Product code	LN7-A4	Beam Angle	15-60°
Watts	7W	CRI	Ra>90
Input Voltage	48V	IP Rating	IP20
Flux	560lm	Dimension	Φ60x200mm



SKU: 5349	Warm White	3000K
SKU: 5400	Neutral White	4000K



LED Magnetic Track Light  
**7W**



Product code LN7-A4  
Watts 7W  
Input Voltage 48V  
Flux 560lm  
Beam Angle 15°

SKU: 5395    SKU: 5344  
4000K    3000K

CRI Ra>90  
IP Rating IP20  
Dimension  $\phi$ 55x105mm  
Body Color Black

**M35** TRACK    Magnetic    IP20

Power Supplies for Track Light  
**BUILT-IN 48V Output**

DC:48V    IP20



SKU: 5424 100W - 48V  
SKU: 5425 200W - 48V  
SKU: 5426 100W - 48V  
SKU: 5427 200W - 48V  
SKU: 5428 280W - 48V

Watts	100W	200W	100W	200W	280W
Input Voltage	220V	220V	220V	220V	220V
Output Voltage	DC: 48V	DC: 48V	DC: 48V	DC: 48V	DC: 48V
Current	2.1A	4.2A	2.1A	4.2A	5.85A
Material	PC	PC	PC	PC	PC
IP Rating	IP20	IP20	IP20	IP20	IP20
Dimension	190x90x30mm	220x120x30mm	220x120x30mm	220x120x30mm	220x120x30mm

Magnetic Track Light

	<b>M20</b>	<b>M20</b>	<b>M35</b>	<b>M35</b>	<b>M35</b>
	TRACK	TRACK	TRACK	TRACK	TRACK

LED Magnetic Track Light  
**12W**



Product code LN12-A4  
Watts 12W  
Input Voltage 48V  
Flux 960lm  
Beam Angle 15°

SKU: 5396    SKU: 5345  
4000K    3000K

CRI Ra>90  
IP Rating IP20  
Dimension  $\phi$ 65x130mm  
Body Color Black

**M35** TRACK    Magnetic    IP20

LED Magnetic Track Light  
**20W**



Product code LN20-A4  
Watts 20W  
Input Voltage 48V  
Flux 1600lm  
Beam Angle 15°

SKU: 5397    SKU: 5346  
4000K    3000K

CRI Ra>90  
IP Rating IP20  
Dimension  $\phi$ 65x130mm  
Body Color Black

**M35** TRACK    Magnetic    IP20



800  
Lumens



1440  
Lumens



**LED Magnetic Track Light - M20**  
**10W ; 18W**

**M20**  
TRACK  
Magnetic  
IP20

Product code	LN10-A4 ; LN18-A4	CRI	Ra>80
Power	10W ;18W	IP Rating	IP20
Beam Angle	120°	Dimension 10W	300x22x25mm
Voltage	DC:48V	Dimension 18W	600x22x25mm

SKU: 5417	10W 30cm	3000K
SKU: 5416	10W 30cm	4000K
SKU: 5419	18W 60cm	3000K
SKU: 5418	18W 60cm	4000K

480  
Lumens



960  
Lumens



**LED Magnetic Track Light - M20**  
**6W ; 12W**

**M20**  
TRACK  
Magnetic  
IP20

Product code	LN6-A4 ; LN12-A4	CRI	Ra>80
Power	6W ;12W	IP Rating	IP20
Beam Angle	24°	Dimension 10W	112x22x45mm
Voltage	DC:48V	Dimension 18W	220x22x45mm

SKU: 5312	6W	3000K
SKU: 5311	6W	4000K
SKU: 5314	12W	3000K
SKU: 5313	12W	4000K

**LED Magnetic Track Light**  
**12W**

**M20**  
TRACK  
Magnetic  
IP20



Watts	12W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	960lm	Dimension	Φ65x130mm
Beam Angle	15°	Body Color	Black

SKU: 5316	Warm White	3000K
SKU: 5315	Neutral White	4000K

**LED Magnetic Track Light**  
**10W**

**M20**  
TRACK  
Magnetic  
IP20



Watts	10W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	800lm	Dimension	Φ70x100mm
Beam Angle	15-24°	Body Color	Black

SKU: 5379	Warm White	3000K
SKU: 5378	Neutral White	4000K



**Straight Joint**

SKU: 5356



**Joining Cable**

SKU: 5357




**Input Cable**

SKU: 5355



**Hanging Accessories**

SKU: 5354

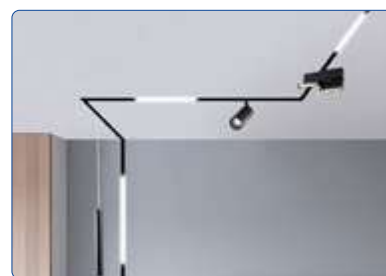

**LED Magnetic Track Light 9W**

**720**  
Lumens

**M20**  
TRACK

**45°**

**Magnetic**

**IP20**

Product code LN9-A4  
Power 9W  
Beam Angle 24°  
Voltage DC:48V

CRI Ra>80  
IP Rating IP20  
Dimension 137x34x95mm

SKU: 5318 Warm White 3000K  
SKU: 5317 Neutral White 4000K



**LED Magnetic Track Light 5W**

**560**  
Lumens

**M20**  
TRACK

**Magnetic**

**IP20**

Product code LN5-A4  
Power 5W  
Beam Angle 15-60°  
Voltage DC:48V

CRI Ra>80  
IP Rating IP20  
Dimension  $\phi 60 \times 200$ mm

SKU: 5320 Warm White 3000K  
SKU: 5319 Neutral White 4000K



**LED Magnetic Track Light 6W**

**480**  
Lumens

**Magnetic**

**IP20**

Product code LN6-A5  
Watts 6W  
Input Voltage DC48V  
Flux 480lm  
Beam Angle 90°

CRI Ra>80  
IP Rating IP20  
Dimension  $\phi 130$ mm  
Body Color Black

SKU: 5335 Neutral White 4000K  
SKU: 5334 Warm White 3000K

**M20**  
**M35**  
TRACK

**LED Magnetic Track Light 10W**

**800**  
Lumens

**Magnetic**

**IP20**

Product code LN10-A5  
Watts 10W  
Input Voltage DC48V  
Flux 800lm  
Beam Angle 90°

CRI Ra>80  
IP Rating IP20  
Dimension  $\phi 85$ mm  
Body Color Black

SKU: 5337 Neutral White 4000K  
SKU: 5336 Warm White 3000K

**M20**  
**M35**  
TRACK



**LED Magnetic Track Light 5W**

**400**  
Lumens

**Magnetic**

**IP20**

Product code LN5-A5  
Watts 5W  
Input Voltage DC48V  
Flux 400lm  
Beam Angle 50°

CRI Ra>80  
IP Rating IP20  
Dimension 88x75mm  
Body Color Black

SKU: 5339 Neutral White 4000K  
SKU: 5338 Warm White 3000K

**M20**  
**M35**  
TRACK





TRACK SYSTEM Three-Phase

**WHITE**

**Length: 1.0m ; 1.5m ; 2.0m**

**S35**



- SKU: 5241 WHITE BODY - 1m
- SKU: 5242 WHITE BODY - 1.5m
- SKU: 5243 WHITE BODY - 2m

**R35 Build-in**

- SKU: 5250 WHITE BODY - 1m
- SKU: 5251 WHITE BODY - 1.5m
- SKU: 5252 WHITE BODY - 2m

**R35B Build-in**

- SKU: 5255 WHITE BODY - 1m
- SKU: 5256 WHITE BODY - 1.5m
- SKU: 5257 WHITE BODY - 2m



**Accessories:**



INPUT CABLE  
SKU: 5246



STRAIGHT JOINT  
SKU: 5247



JOINING CABLE  
SKU: 5248



COVER PLATE  
SKU: 5254



S35 SURFACE CORNER  
SKU: 5249



R35 SURFACE CORNER  
SKU: 5253



R35-B SURFACE CORNER  
SKU: 5258



R35-A Concave Angle  
SKU: 5259



SLIM POWER SUPPLY 48V  
**100W 2.08A**

**M35**  
TRACK



Watts	100W	Current	2.08A
Input Voltage	220V	Material	Metal
Output Voltage	DC: 48V	IP Rating	IP20

SKU: 5216 WHITE BODY



SLIM POWER SUPPLY 48V  
**200W 4.16A**

**M35**  
TRACK



Watts	200W	Current	4.16A
Input Voltage	220V	Material	Metal
Output Voltage	DC: 48V	IP Rating	IP20

SKU: 5217 WHITE BODY



**LED Magnetic Track Light  
12W**


Watts 12W  
 Input Voltage DC48V  
 Flux 960lm  
 Beam Angle 120°

SKU: 5265    SKU: 5261  
 ■ 4000K    ■ 3000K

CRI Ra>90  
 IP Rating IP20  
 Dimension 300x34x50.5mm  
 Body Color White


**M35**  
 TRACK

960  
Lumens


**LED Magnetic Track Light  
12W**


Watts 12W  
 Input Voltage DC48V  
 Flux 960lm  
 Beam Angle 90°

SKU: 5271    SKU: 5263  
 ■ 4000K    ■ 3000K

CRI Ra>90  
 IP Rating IP20  
 Dimension Φ65x130  
 Body Color White


**M35**  
 TRACK

960  
Lumens


**LED Magnetic Track Light  
20W**


Watts 20W  
 Input Voltage DC48V  
 Flux 1600lm  
 Beam Angle 120°

SKU: 5266    SKU: 5262  
 ■ 4000K    ■ 3000K

CRI Ra>90  
 IP Rating IP20  
 Dimension 600x34x50.5mm  
 Body Color White


**M35**  
 TRACK

1600  
Lumens


**LED Magnetic Track Light  
10W**


Watts 10W  
 Input Voltage DC48V  
 Flux 800lm  
 Beam Angle 90°

SKU: 5268    SKU: 5267  
 ■ 4000K    ■ 3000K

CRI Ra>90  
 IP Rating IP20  
 Dimension 134x34x50.5mm  
 Body Color White


**M35**  
 TRACK

800  
Lumens


**LED Magnetic Track Light  
20W**


Watts 20W  
 Input Voltage DC48V  
 Flux 1600lm  
 Beam Angle 120°

SKU: 5270    SKU: 5269  
 ■ 4000K    ■ 3000K

CRI Ra>90  
 IP Rating IP20  
 Dimension 270x34x50.5mm  
 Body Color White


**M35**  
 TRACK

1600  
Lumens


**LED Magnetic Track Light  
10W**

Watts 10W  
 Input Voltage DC48V  
 Flux 800lm  
 Beam Angle 24°

SKU: 5273  
 ■ 3000K

CRI Ra>90  
 IP Rating IP20  
 Dimension 137x34x95  
 Body Color White


**M35**  
 TRACK

800  
Lumens





TRACK SYSTEM Three-Phase

**BLACK**

**Length: 1.0m ; 1.5m ; 2.0m**

**S15**

- SKU: 5207 BLACK BODY - 1m
- SKU: 5208 BLACK BODY - 1.5m
- SKU: 5209 BLACK BODY - 2m

**R15 Build-in**

- SKU: 5203 BLACK BODY - 1m
- SKU: 5204 BLACK BODY - 1.5m
- SKU: 5205 BLACK BODY - 2m

**R15B Build-in**

- SKU: 5201 BLACK BODY - 1m
- SKU: 5202 BLACK BODY - 1.5m
- SKU: 5203 BLACK BODY - 2m



**ACCESSORIES:**



**POWER CONNECTOR**  
SKU: 5211



**STRAIGHT CONNECTOR**  
SKU: 5212



**ADJUSTABLE CONNECTOR**  
SKU: 5213

**SLIM POWER SUPPLY 48V - BLACK**



SKU: 5214  
80W 1.66A

Watts	80W	Current	1.66A
Input Voltage	220V	Material	Metal
Output Voltage	DC: 48V	IP Rating	IP20



SKU: 5215  
150W 3.12A

Watts	150W	Current	3.12A
Input Voltage	220V	Material	Metal
Output Voltage	DC: 48V	IP Rating	IP20



LED Magnetic Track Light  
**6W ; 10W**

**M15**  
TRACK



Watts	6W ; 10W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	480 ; 800lm	Dimension	φ35x70 mm
Beam Angle	90°	Body Color	Black

**480 Lumens** **6W** SKU: 5221 4000K SKU: 5222 3000K

**800 Lumens** **10W** SKU: 5223 4000K SKU: 5224 3000K



LED Magnetic Track Light  
**10W ; 20W**

**M15**  
TRACK



Watts	10W ; 20W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	650 ; 1300lm	Dimension 10W	300x15x18mm
Beam Angle	120°	Dimension 20W	600x15x18mm

**650 Lumens** **10W** SKU: 5225 4000K SKU: 5226 3000K

**1300 Lumens** **20W** SKU: 5227 4000K SKU: 5228 3000K



LED Magnetic Track Light  
**12W**

**M15**  
TRACK



Watts	12W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	780lm	Dimension	232x15x18mm
Beam Angle	24°	Body Color	Black

**780 Lumens** **12W** SKU: 5229 4000K SKU: 5230 3000K



MINI MAGNETIC TRACK SYSTEM

**BLACK - 30mm**


**Length: 1.0m ; 1.5m ; 2.0m**

**MM30**

- SKU: 5480 BLACK BODY - 1m
- SKU: 5481 BLACK BODY - 1.5m
- SKU: 5482 BLACK BODY - 2m



ACCESSORIES:

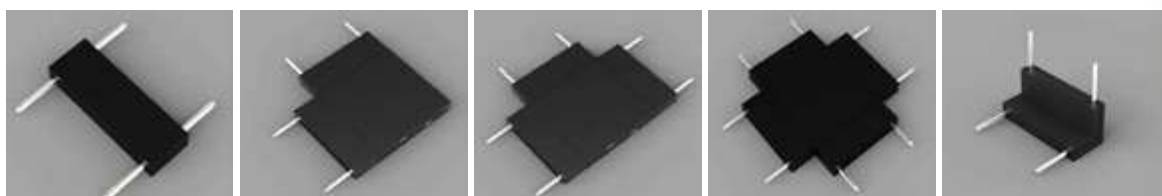

SKU: 5483      SKU: 5484      SKU: 5485      SKU: 5486      SKU: 5487



SLIM POWER SUPPLY 48V



<b>SKU: 5488</b>	<b>100W 2.08A</b>		
Watts	100W	Current	2.08A
Input Voltage	220V	Material	Aluminium
Output Voltage	DC: 48V	IP Rating	IP20
<b>SKU: 5489</b>	<b>200W 2.08A</b>		
Watts	200W	Current	4.16A
Input Voltage	220V	Material	Aluminium
Output Voltage	DC: 48V	IP Rating	IP20





**LED Mini Magnetic Track Light  
6W**



Watts	6W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	720lm	Dimension	φ54x63x98mm
Beam Angle	32°	Body Color	Black

SKU: 5494    SKU: 5495  
■ 4000K    ■ 3000K



**MM30**  
TRACK



**LED Mini Magnetic Track Light  
5W**



Watts	5W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	425lm	Dimension	48x35x60mm
Beam Angle	38°	Body Color	Black

SKU: 5496    SKU: 5497  
■ 4000K    ■ 3000K



**MM30**  
TRACK



**LED Mini Magnetic Track Light  
4W**



Watts	4W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	240lm	Dimension	48x35x60mm
Beam Angle	80°	Body Color	Black

SKU: 5498    SKU: 5499  
■ 4000K    ■ 3000K



**MM30**  
TRACK



**LED Mini Magnetic Track Light  
12W**



Watts	12W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	400lm	Dimension	300x32x11mm
Beam Angle	110°	Body Color	Black

SKU: 5490    SKU: 5491  
■ 4000K    ■ 3000K



**MM30**  
TRACK



**LED Mini Magnetic Track Light  
10W**



Watts	10W	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Flux	520lm	Dimension	240x32x11mm
Beam Angle	25°	Body Color	Black

SKU: 5492    SKU: 5493  
■ 4000K    ■ 3000K



**MM30**  
TRACK








LED Floodlights are commonly used for outdoor lighting large areas. Applicable for villas and country houses, LED floodlights are number one choice for gardens and large open spaces.

Features:

- Up to 80% power saving
- High power and IP65 rating
- Large beam angles for single product lighting
- Wall or pylon mountable
- Tough and reliable
- Options with solar panels

Application:

- Outdoor lighting
- Large area coverage
- Houses or warehouse usage

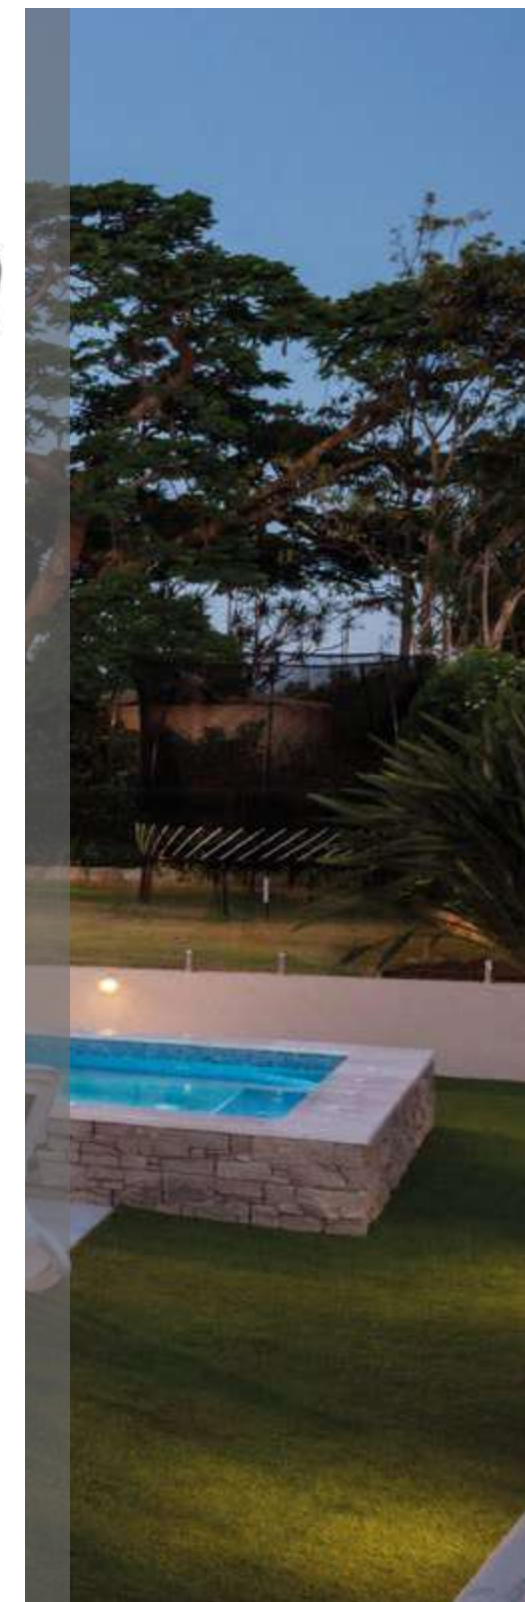

LED FLOODLIGHTS


LED FLOODLIGHTS


**LED CCT SOLAR FLOODLIGHT**  
**Solar Panel Power:5V/10W**

1000 Lumens  
120°  
IP65

EQ.Watts	10W	Beam Angle	120°
Battery	3.2V / 10Ah	CRI	Ra>80
Flux	1000lm	IP Rating	IP65


SKU: 5473  
CCT  
6000K 4500K 3000K


**LED CCT SOLAR FLOODLIGHT**  
**Solar Panel Power:5V/20W**

1800 Lumens  
120°  
IP65

EQ.Watts	10W	Beam Angle	120°
Battery	3.2V / 20Ah	CRI	Ra>80
Flux	1800lm	IP Rating	IP65


SKU: 5474  
CCT  
6000K 4500K 3000K


**LED CCT SOLAR FLOODLIGHT**  
**Solar Panel Power:5V/30W**

2700 Lumens  
120°  
IP65

EQ.Watts	30W	Beam Angle	120°
Battery	3.2V / 30Ah	CRI	Ra>80
Flux	2700lm	IP Rating	IP65

SKU: 5475  
CCT  
6000K 4500K 3000K


**LED SMD SOLAR FLOODLIGHT**  
**Solar Panel Power:6V/30W**

3000 Lumens  
120°  
IP65

EQ.Watts	30W	Beam Angle	120°
Battery	3.2V / 30Ah	CRI	Ra>80
Flux	3000lm	IP Rating	IP65


SKU: 5468  
6000K


**LED SMD SOLAR FLOODLIGHT**  
**Solar Panel Power:6V/8W**

500 Lumens  
120°  
IP65

EQ.Watts	16W	Beam Angle	120°
Battery	3.2V / 5Ah	CRI	Ra>80
Flux	500lm	IP Rating	IP65

SKU: 5430  
6000K


**LED SMD SOLAR FLOODLIGHT**  
**Solar Panel Power:6V/16W**

1200 Lumens  
120°  
IP65

EQ.Watts	16W	Beam Angle	120°
Battery	3.2V / 10Ah	CRI	Ra>80
Flux	1200lm	IP Rating	IP65

SKU: 5431  
6000K


**LED SMD SOLAR FLOODLIGHT**  
**Solar Panel Power:6V/20W**

1600 Lumens  
120°  
IP65

EQ.Watts	20W	Beam Angle	120°
Battery	3.2V / 15Ah	CRI	Ra>80
Flux	1600lm	IP Rating	IP65

SKU: 5432  
6000K


**LED SMD SOLAR FLOODLIGHT**  
**Solar Panel Power:6V/25W**

2200 Lumens  
120°  
IP65


EQ.Watts	25W	Beam Angle	120°
Battery	3.2V / 20Ah	CRI	Ra>80
Flux	2200lm	IP Rating	IP65

SKU: 5433  
6000K





LED SOLAR POWER FLOOD LIGHT **PF>0.9**  
with Solar Panel and Remote



<b>6W</b> EQ.Watts	<b>800</b> Lumens	Solar Panel Flux	6W/5V 800lm	IP Rating	IP65	Body Color	Black	<b>3.2V 6Ah</b>	SKU: 5291	<b>6000K</b>
<b>10W</b> EQ.Watts	<b>1200</b> Lumens	Solar Panel Flux	10W/5V 1200lm	IP Rating	IP65	Body Color	Black	<b>3.2V 10Ah</b>	SKU: 5292	<b>6000K</b>
<b>15W</b> EQ.Watts	<b>2000</b> Lumens	Solar Panel Flux	15W/5V 2000lm	IP Rating	IP65	Body Color	Black	<b>3.2V 15Ah</b>	SKU: 5293	<b>6000K</b>
<b>20W</b> EQ.Watts	<b>2600</b> Lumens	Solar Panel Flux	20W/5V 2600lm	IP Rating	IP65	Body Color	Black	<b>3.2V 20Ah</b>	SKU: 5294	<b>6000K</b>
<b>25W</b> EQ.Watts	<b>3200</b> Lumens	Solar Panel Flux	25W/5V 3200lm	IP Rating	IP65	Body Color	Black	<b>3.2V 25Ah</b>	SKU: 5295	<b>6000K</b>
<b>30W</b> EQ.Watts	<b>3800</b> Lumens	Solar Panel Flux	30W/5V 3800lm	IP Rating	IP65	Body Color	Black	<b>3.2V 30Ah</b>	SKU: 5296	<b>6000K</b>
<b>40W</b> EQ.Watts	<b>4800</b> Lumens	Solar Panel Flux	40W/5V 4800lm	IP Rating	IP65	Body Color	Black	<b>3.2V 40Ah</b>	SKU: 5297	<b>6000K</b>
<b>NEW 40W</b> EQ.Watts	<b>6000</b> Lumens	Solar Panel Flux	40W/5V 6000lm	IP Rating	IP65	Body Color	Black	<b>3.2V 40Ah</b>	SKU: 5298	<b>6000K</b>

**NEW** **SANAN** CHIP ANTI GLARE



LED SMD FLOODLIGHT  
**Milky-Lens**



<b>20W</b> <b>1600</b> Lumens	Product code	FL20-B1	Beam Angle	120°		SKU:5991
	Watts	20W	CRI	Ra>80		<b>4000K</b>
	Input Voltage	AC : 180-265V	IP Rating	IP65		
	Flux	1600lm	Body Color	Black		
<b>30W</b> <b>2400</b> Lumens	Product code	FL30-B1	Beam Angle	120°		SKU:5992
	Watts	30W	CRI	Ra>80		<b>4000K</b>
	Product code	AC : 180-265V	IP Rating	IP65		
	Flux	2400lm	Body Color	Black		
<b>50W</b> <b>4000</b> Lumens	Product code	FL50-B1	Beam Angle	120°		SKU:5993
	Watts	50W	CRI	Ra>80		<b>4000K</b>
	Input Voltage	AC : 180-265V	IP Rating	IP65		
	Flux	4000lm	Body Color	Black		



**LED SMD FLOODLIGHT PF>0.9**  
**With Solar Panels and Remote Control**




**LED SMD FLOODLIGHT PF>0.9**  
**With Solar Panels and Remote Control**



**800**  
Lumens


Product code	FL25-A6	Beam Angle	120°
EQ.Watts	12W	CRI	Ra>80
Battery	3.2V / 5.5Ah	IP Rating	IP65
Flux	800lm	Body Color	Black



SKU: 5460  
6000K

**400**  
Lumens


Product code	FL6-B5	Beam Angle	90°
EQ.Watts	6W	CRI	Ra>80
Battery	3.2V / 5Ah	IP Rating	IP65
Flux	400lm	Body Color	Grey



SKU: 5455  
6000K

**1300**  
Lumens


Product code	FL40-A6	Beam Angle	120°
EQ.Watts	40W	CRI	Ra>80
Battery	3.2V / 11Ah	IP Rating	IP65
Flux	1300lm	Body Color	Black



SKU: 5461  
6000K

**500**  
Lumens


Product code	FL8-B5	Beam Angle	90°
EQ.Watts	8W	CRI	Ra>80
Battery	3.2V / 6Ah	IP Rating	IP65
Flux	500lm	Body Color	Grey



SKU: 5456  
6000K

**1800**  
Lumens


Product code	FL60-B2	Beam Angle	120°
EQ.Watts	20W	CRI	Ra>80
Battery	6.4V / 11Ah	IP Rating	IP65
Flux	1800lm	Body Color	Black



SKU: 5462  
6000K

**1200**  
Lumens


Product code	FL15-B5	Beam Angle	90°
EQ.Watts	15W	CRI	Ra>80
Battery	3.2V / 10Ah	IP Rating	IP65
Flux	1200lm	Body Color	Grey



SKU: 5457  
6000K

**2500**  
Lumens


Product code	FL100-B2	Beam Angle	120°
EQ.Watts	35W	CRI	Ra>80
Battery	6.4V / 16.5Ah	IP Rating	IP65
Flux	2500lm	Body Color	Black



SKU: 5463  
6000K

**1800**  
Lumens


Product code	FL20-B5	Beam Angle	90°
EQ.Watts	20W	CRI	Ra>80
Battery	3.2V / 20Ah	IP Rating	IP65
Flux	1800lm	Body Color	Grey



SKU: 5458  
6000K

**2400**  
Lumens

Product code	FL30-B5	Beam Angle	90°
EQ.Watts	30W	CRI	Ra>80
Battery	3.2V / 25Ah	IP Rating	IP65
Flux	2400lm	Body Color	Grey



SKU: 5459  
6000K


**NEW**

120°  
90 Lumens/W  
IP65




**LED SMD FLOODLIGHT**  
**White Body - 15cm Cable**

<b>10W</b>  900 Lumens	Product code	FL10-B3	Beam Angle	120°
	Watts	10W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	900lm	Body Color	White




SKU:15801 6000K  
SKU:15802 4000K  
SKU:15803 3000K

<b>20W</b>  1800 Lumens	Product code	FL20-B3	Beam Angle	120°
	Watts	20W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	1800lm	Body Color	White




SKU:15804 6000K  
SKU:15805 4000K  
SKU:15806 3000K

<b>30W</b>  2700 Lumens	Product code	FL30-B3	Beam Angle	120°
	Watts	30W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	2700lm	Body Color	White




SKU:15807 6000K  
SKU:15808 4000K  
SKU:15809 3000K

<b>50W</b>  4500 Lumens	Product code	FL50-B3	Beam Angle	120°
	Watts	50W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	4500lm	Body Color	White



SKU:15810 6000K  
SKU:15811 4000K  
SKU:15812 3000K

<b>100W</b>  9000 Lumens	Product code	FL100-B3	Beam Angle	120°
	Watts	100W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	9000lm	Body Color	White



SKU:15813 6000K  
SKU:15814 4000K  
SKU:15815 3000K


**NEW**

120°  
90 Lumens/W  
IP65




**LED SMD FLOODLIGHT**  
**Black Body - 15cm Cable**

<b>10W</b>  900 Lumens	Product code	FL10-B3	Beam Angle	120°
	Watts	10W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	900lm	Body Color	Black




SKU:15816 6000K  
SKU:15817 4000K  
SKU:15818 3000K

<b>20W</b>  1800 Lumens	Product code	FL20-B3	Beam Angle	120°
	Watts	20W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	1800lm	Body Color	Black




SKU:15819 6000K  
SKU:15820 4000K  
SKU:15821 3000K

<b>30W</b>  2700 Lumens	Product code	FL30-B3	Beam Angle	120°
	Watts	30W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	2700lm	Body Color	Black




SKU:15822 6000K  
SKU:15823 4000K  
SKU:15824 3000K

<b>50W</b>  4500 Lumens	Product code	FL50-B3	Beam Angle	120°
	Watts	50W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	4500lm	Body Color	Black



SKU:15825 6000K  
SKU:15826 4000K  
SKU:15827 3000K

<b>100W</b>  9000 Lumens	Product code	FL100-B3	Beam Angle	120°
	Watts	100W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	9000lm	Body Color	Black



SKU:15828 6000K  
SKU:15829 4000K  
SKU:15830 3000K


**NEW**

## LED SMD FLOODLIGHT


## Sensor - White Body -15cm Cable

**10W**


Product code	FL10-B3	Beam Angle	120°
Watts	10W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	900lm	Body Color	White


 SKU:15837 6000K  
 SKU:15838 4000K  
 SKU:15839 3000K
**20W**


Product code	FL20-B3	Beam Angle	120°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	1800lm	Body Color	White


 SKU:15840 6000K  
 SKU:15841 4000K  
 SKU:15842 3000K
**30W**

Product code	FL30-B3	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	2700lm	Body Color	White


 SKU:15843 6000K  
 SKU:15844 4000K  
 SKU:15845 3000K
**50W**

Product code	FL50-B3	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	4500lm	Body Color	White



 SKU:15846 6000K  
 SKU:15847 4000K
**NEW**

## LED SMD FLOODLIGHT


## Sensor - Black Body -15cm Cable

**10W**


Product code	FL10-B3	Beam Angle	120°
Watts	10W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	900lm	Body Color	Black


 SKU:15848 6000K  
 SKU:15849 4000K  
 SKU:15850 3000K
**20W**


Product code	FL20-B3	Beam Angle	120°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	1800lm	Body Color	Black


 SKU:15851 6000K  
 SKU:15852 4000K  
 SKU:15853 3000K
**30W**

Product code	FL30-B3	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	2700lm	Body Color	Black


 SKU:15854 6000K  
 SKU:15855 4000K  
 SKU:15856 3000K
**50W**

Product code	FL50-B3	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	4500lm	Body Color	Black


 SKU:15857 6000K  
 SKU:15858 4000K

**NEW**
**5**  
 Years  
 Warranty

90°

 100  
 Lumens/W

IP65


**PREMIUM LINE**

LED SMD FLOODLIGHT

**White Body****10W****1000**


Lumens

 Product code FL10-A5  
 Watts 10W  
 Input Voltage AC : 180-265V  
 Flux 1000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color White

 SKU:15859 SKU:15860 SKU:15861  
**20W****2000**


Lumens

 Product code FL20-A5  
 Watts 20W  
 Product code AC : 180-265V  
 Flux 2000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color White

 SKU:15862 SKU:15863 SKU:15864  
**30W****3000**


Lumens

 Product code FL30-A5  
 Watts 30W  
 Input Voltage AC : 180-265V  
 Flux 3000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color White

 SKU:15865 SKU:15866 SKU:15867  
**50W****5000**


Lumens

 Product code FL50-A5  
 Watts 50W  
 Input Voltage AC : 180-265V  
 Flux 5000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color White

 SKU:15868 SKU:15869 SKU:15870  
**100W****10000**

Lumens

 Product code FL100-A5  
 Watts 100W  
 Input Voltage AC : 180-265V  
 Flux 10000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color White

 SKU:15871 SKU:15872 SKU:15873  
**NEW**
**5**  
 Years  
 Warranty

90°

 100  
 Lumens/W

IP65


**PREMIUM LINE**

LED SMD FLOODLIGHT

**Black Body****10W****1000**


Lumens

 Product code FL10-A5  
 Watts 10W  
 Input Voltage AC : 180-265V  
 Flux 1000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color Black

 SKU:15874 SKU:15875 SKU:15876  
**20W****2000**


Lumens

 Product code FL20-A5  
 Watts 20W  
 Product code AC : 180-265V  
 Flux 2000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color Black

 SKU:15877 SKU:15878 SKU:15879  
**30W****3000**


Lumens

 Product code FL30-A5  
 Watts 30W  
 Input Voltage AC : 180-265V  
 Flux 3000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color Black

 SKU:15880 SKU:15881 SKU:15882  
**50W****5000**


Lumens

 Product code FL50-A5  
 Watts 50W  
 Input Voltage AC : 180-265V  
 Flux 5000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color Black

 SKU:15883 SKU:15884 SKU:15885  
**100W****10000**

Lumens

 Product code FL100-A5  
 Watts 100W  
 Input Voltage AC : 180-265V  
 Flux 10000lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color Black

 SKU:15886 SKU:15887 SKU:15888

**NEW**

**LUMILEDS CHIPS**

**5**  
Years  
Warranty

90°

**HIGH**  
Lumens


IP65



**PREMIUM LINE**


LED SMD FLOODLIGHT **HIGH POWER**  
**Black Body**

<b>150W</b>	Product code	FL150-A5	Beam Angle	90°
<b>15000</b> Lumens	Watts	150W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	15000lm	Body Color	Black




SKU:15889 6000K  
SKU:15890 4000K

<b>200W</b>	Product code	FL200-A5	Beam Angle	90°
<b>28000</b> Lumens	Watts	200W	CRI	Ra>80
	Product code	AC : 180-265V	IP Rating	IP65
	Flux	28000lm	Body Color	Black




SKU:15891 6000K  
SKU:15892 4000K

<b>300W</b>	Product code	FL300-A5	Beam Angle	90°
<b>42000</b> Lumens	Watts	300W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	42000lm	Body Color	Black




SKU:15893 6000K  
SKU:15894 4000K

<b>400W</b>	Product code	FL400-A5	Beam Angle	90°
<b>56000</b> Lumens	Watts	400W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	56000lm	Body Color	Black



SKU:15895 6000K  
SKU:15896 4000K

<b>500W</b>	Product code	FL100-A5	Beam Angle	90°
<b>70000</b> Lumens	Watts	500W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	10000lm	Body Color	Black



SKU:15897 6000K  
SKU:15898 4000K

**NEW**

120°


**90**  
Lumens/W

IP65




LED SMD FLOODLIGHT **HIGH POWER**  
**Black Body**

<b>150W</b>	Product code	FL150-A5	Beam Angle	120°
<b>13500</b> Lumens	Watts	150W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	13500lm	Body Color	Black




SKU:15831 6000K  
SKU:15832 4000K

<b>200W</b>	Product code	FL200-A5	Beam Angle	120°
<b>18000</b> Lumens	Watts	200W	CRI	Ra>80
	Product code	AC : 180-265V	IP Rating	IP65
	Flux	18000lm	Body Color	Black



SKU:15833 6000K  
SKU:15834 4000K

<b>300W</b>	Product code	FL300-A5	Beam Angle	120°
<b>27000</b> Lumens	Watts	300W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	27000lm	Body Color	Black



SKU:15835 6000K  
SKU:15836 4000K






LED SMD FLOODLIGHT


White Body

<b>10W</b> 900 Lumens	Product code	FL10-B3	Beam Angle	90°
	Watts	10W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	900lm	Body Color	White




SKU: 5701 6000K  
SKU: 5702 4500K  
SKU: 5703 2700K

<b>20W</b> 1800 Lumens	Product code	FL20-B3	Beam Angle	90°
	Watts	20W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	1800lm	Body Color	White




SKU: 5704 6000K  
SKU: 5705 4500K  
SKU: 5706 2700K

<b>30W</b> 2700 Lumens	Product code	FL30-B3	Beam Angle	90°
	Watts	30W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	2700lm	Body Color	White




SKU: 5707 6000K  
SKU: 5708 4500K  
SKU: 5709 2700K

<b>50W</b> 4500 Lumens	Product code	FL50-B3	Beam Angle	90°
	Watts	50W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	4500lm	Body Color	White



SKU: 5710 6000K  
SKU: 5711 4500K  
SKU: 5712 2700K

<b>100W</b> 9000 Lumens	Product code	FL100-B3	Beam Angle	90°
	Watts	100W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	9000lm	Body Color	White




SKU: 5713 6000K  
SKU: 5714 4500K  
SKU: 5715 2700K



LED SMD FLOODLIGHT


Black Body

<b>10W</b> 900 Lumens	Product code	FL10-B3	Beam Angle	90°
	Watts	10W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	900lm	Body Color	Black




SKU: 5721 6000K  
SKU: 5722 4500K  
SKU: 5723 2700K

<b>20W</b> 1800 Lumens	Product code	FL20-B3	Beam Angle	90°
	Watts	20W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	1800lm	Body Color	Black




SKU: 5724 6000K  
SKU: 5725 4500K  
SKU: 5726 2700K

<b>30W</b> 2700 Lumens	Product code	FL30-B3	Beam Angle	90°
	Watts	30W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	2700lm	Body Color	Black




SKU: 5727 6000K  
SKU: 5728 4500K  
SKU: 5729 2700K

<b>50W</b> 4500 Lumens	Product code	FL50-B3	Beam Angle	90°
	Watts	50W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	4500lm	Body Color	Black




SKU: 5730 6000K  
SKU: 5731 4500K  
SKU: 5732 2700K

<b>100W</b> 9000 Lumens	Product code	FL100-B3	Beam Angle	90°
	Watts	100W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	9000lm	Body Color	Black



SKU: 5733 6000K  
SKU: 5734 4500K  
SKU: 5735 2700K




## LED SMD FLOODLIGHT


## White Body - PIR Sensor

**10W**  
**900**  
 Lumens


 Product code FL10-B3  
 Watts 10W  
 Input Voltage AC : 220-240V  
 Flux 900lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color White

 SKU: 5760   SKU: 5761   SKU: 5762  
**20W**  
**1800**  
 Lumens




 Product code FL20-B3  
 Watts 20W  
 Input Voltage AC : 220-240V  
 Flux 1800lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color White

 SKU: 5763   SKU: 5764   SKU: 5765  
**30W**  
**2700**  
 Lumens

 Product code FL30-B3  
 Watts 30W  
 Input Voltage AC : 220-240V  
 Flux 2700lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color White

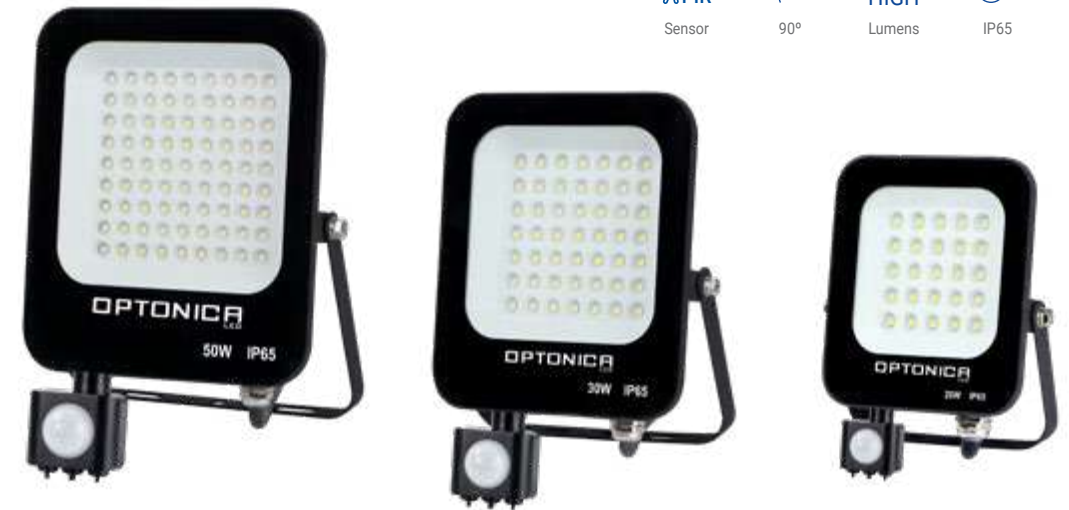 SKU: 5766   SKU: 5767   SKU: 5768  
**50W**  
**4500**  
 Lumens

 Product code FL50-B3  
 Watts 50W  
 Input Voltage AC : 220-240V  
 Flux 4500lm


 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color White

 SKU: 5769   SKU: 5770  


## LED SMD FLOODLIGHT


## Black Body - PIR Sensor

**10W**  
**900**  
 Lumens


 Product code FL10-B3  
 Watts 10W  
 Input Voltage AC : 220-240V  
 Flux 900lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color Black

 SKU: 5771   SKU: 5772   SKU: 5773  
**20W**  
**1800**  
 Lumens


 Product code FL20-B3  
 Watts 20W  
 Input Voltage AC : 220-240V  
 Flux 1800lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color Black

 SKU: 5774   SKU: 5775   SKU: 5776  
**30W**  
**2700**  
 Lumens

 Product code FL30-B3  
 Watts 30W  
 Input Voltage AC : 220-240V  
 Flux 2700lm

 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color Black

 SKU: 5777   SKU: 5778   SKU: 5779  
**50W**  
**4500**  
 Lumens

 Product code FL50-B3  
 Watts 50W  
 Input Voltage AC : 220-240V  
 Flux 4500lm


 Beam Angle 90°  
 CRI Ra>80  
 IP Rating IP65  
 Body Color Black

 SKU: 5780   SKU: 5781



LED SMD FLOODLIGHT **PF>0.9**  
**High Power - Grey Body**



<b>150W</b>  <b>15000</b> Lumens	Product code	FL150-B4	Beam Angle	90°
	Watts	150W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	15000lm	Body Color	Grey



SKU: 5743 6000K  
SKU: 5744 4500K



**Floodlight Spike**

Body Color	Black
Material	Aluminium

SKU: 6682 160x35cm  
SKU: 6683 265x55cm



**Billboard Stand**

Body Color	Black
Material	Iron

SKU: 6684 150x500cm  
SKU: 6685 200x800cm

**NEW**




LED SMD FLOODLIGHT  
**Black Body**  
**\*Optional Sensor**

**CCT SWITCH**




SKU: 5985  
PIR Sensor  
NOT INCLUDED

<b>20W</b>  <b>1800</b> Lumens	Product code	FL20-C1	Beam Angle	120°
	Watts	10W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	1800lm	Body Color	Black




SKU: 5981  
CCT  
6000K 4000K 3000K

<b>30W</b>  <b>2700</b> Lumens	Product code	FL30-C1	Beam Angle	120°
	Watts	30W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	2700lm	Body Color	Black




SKU: 5982  
CCT  
6000K 4000K 3000K

<b>50W</b>  <b>4500</b> Lumens	Product code	FL50-C1	Beam Angle	120°
	Watts	50W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	4500lm	Body Color	Black



SKU: 5983  
CCT  
6000K 4000K 3000K

<b>100W</b>  <b>9000</b> Lumens	Product code	FL100-C1	Beam Angle	120°
	Watts	100W	CRI	Ra>80
	Input Voltage	AC : 180-265V	IP Rating	IP65
	Flux	9000lm	Body Color	Black



SKU: 5984  
CCT  
6000K 4000K 3000K

\*SKU:5985 PIR SENSOR NOT INCLUDED

5  
 Years  
 Warranty


 HIGH  
 Lumens


IP65




Power Cable Length-0.70m


**LED SMD FLOODLIGHT PF>0.9**  
**Premium Line - White Body**


<b>10W</b> <b>850</b> Lumens	Product code	FL10-A5	Beam Angle	150°
	Watts	10W	CRI	Ra>80
	Input Voltage	AC : 175-265V	IP Rating	IP65
	Flux	850lm	Body Color	White


 SKU: 5865    SKU: 5866  


<b>30W</b> <b>2550</b> Lumens	Product code	FL30-A5	Beam Angle	150°
	Watts	30W	CRI	Ra>80
	Input Voltage	AC : 175-265V	IP Rating	IP65
	Flux	2550lm	Body Color	White


 SKU: 5871    SKU: 5873  

<b>50W</b> <b>4250</b> Lumens	Product code	FL50-A5	Beam Angle	150°
	Watts	50W	CRI	Ra>80
	Input Voltage	AC : 175-265V	IP Rating	IP65
	Flux	4250lm	Body Color	White


 SKU: 5876  

<b>100W</b> <b>8500</b> Lumens	Product code	FL100-A5	Beam Angle	150°
	Watts	100W	CRI	Ra>80
	Input Voltage	AC : 175-265V	IP Rating	IP65
	Flux	8500lm	Body Color	White


 SKU: 5879  

 5  
 Years  
 Warranty


 HIGH  
 Lumens


IP65




Power Cable Length-0.70m


**LED SMD FLOODLIGHT PF>0.9**  
**Premium Line - Black Body**


<b>10W</b> <b>850</b> Lumens	Product code	FL10-A5	Beam Angle	150°
	Watts	10W	CRI	Ra>80
	Input Voltage	AC : 175-265V	IP Rating	IP65
	Flux	850lm	Body Color	Black


 SKU: 5880  


<b>20W</b> <b>1700</b> Lumens	Product code	FL20-A5	Beam Angle	150°
	Watts	20W	CRI	Ra>80
	Product code	AC : 175-265V	IP Rating	IP65
	Flux	1700lm	Body Color	Black


 SKU: 5883  

<b>30W</b> <b>2550</b> Lumens	Product code	FL30-A5	Beam Angle	150°
	Watts	30W	CRI	Ra>80
	Input Voltage	AC : 175-265V	IP Rating	IP65
	Flux	2550lm	Body Color	Black



 SKU: 5886    SKU: 5888  

<b>100W</b> <b>8500</b> Lumens	Product code	FL100-A5	Beam Angle	150°
	Watts	100W	CRI	Ra>80
	Input Voltage	AC : 175-265V	IP Rating	IP65
	Flux	8500lm	Body Color	Black



 SKU: 5893


**LED SMD FLOODLIGHT**  
**CITY LINE - White Body**
**10W**800  
Lumens


Product code	FL10-B1	Beam Angle	120°
Watts	10W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	800lm	Body Color	White


 SKU: 5900  
 6000K
 SKU: 5901  
4500K
**20W**1600  
Lumens


Product code	FL20-B1	Beam Angle	120°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	1600lm	Body Color	White


 SKU: 5903  
 6000K
 SKU: 5905  
2800K
**30W**2400  
Lumens


Product code	FL30-B1	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	2400lm	Body Color	White


 SKU: 5907  
 4500K
 SKU: 5908  
2800K
**50W**4000  
Lumens

Product code	FL50-B1	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	4000lm	Body Color	White



 SKU: 5911  
 2800K
**100W**8000  
Lumens

Product code	FL100-B1	Beam Angle	120°
Watts	100W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	8000lm	Body Color	White



 SKU: 5914  
 2800K

**LED SMD FLOODLIGHT**  
**CITY LINE - Black Body**
**10W**800  
Lumens


Product code	FL10-B1	Beam Angle	120°
Watts	10W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	800lm	Body Color	Black


 SKU: 5915  
 6000K
 SKU: 5916  
4500K
**20W**1600  
Lumens


Product code	FL20-B1	Beam Angle	120°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	1600lm	Body Color	Black


 SKU: 5918  
 6000K
 SKU: 5919  
4500K
SKU: 5920  
2800K
**30W**2400  
Lumens


Product code	FL30-B1	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	2400lm	Body Color	Black


 SKU: 5921  
 6000K
 SKU: 5922  
4500K
SKU: 5923  
2800K
**50W**4000  
Lumens

Product code	FL50-B1	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	4000lm	Body Color	Black



 SKU: 5925  
 4500K
**100W**8000  
Lumens

Product code	FL100-B1	Beam Angle	120°
Watts	100W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	8000lm	Body Color	Black


 SKU: 5927  
 6000K
 SKU: 5928  
4500K



**LED SMD FLOODLIGHT**  
**CITY LINE- White Body**  
**With PIR Sensor**
**10W**  
**800**  
 Lumens

Product code	FL10-B2	Beam Angle	120°
Watts	10W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	800lm	Body Color	White


 SKU: 5930 6000K  
 SKU: 5931 4500K  
 SKU: 5932 2800K


**20W**  
**1600**  
 Lumens

Product code	FL20-B2	Beam Angle	120°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	1600lm	Body Color	White


 SKU: 5934 4500K  
 SKU: 5935 2800K


**30W**  
**2400**  
 Lumens

Product code	FL30-B2	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	2400lm	Body Color	White


 SKU: 5937 4500K  
 SKU: 5938 2800K

**50W**  
**4000**  
 Lumens


Product code	FL50-B2	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	4000lm	Body Color	White



SKU: 5939 6000K



**LED SMD FLOODLIGHT**  
**CITY LINE - Black Body**  
**With PIR Sensor**
**10W**  
**800**  
 Lumens

Product code	FL10-B2	Beam Angle	120°
Watts	10W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	800lm	Body Color	Black


 SKU: 5942 4500K  
 SKU: 5943 2800K


**20W**  
**1600**  
 Lumens

Product code	FL20-B2	Beam Angle	120°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	1600lm	Body Color	Black


 SKU: 5945 4500K  
 SKU: 5946 2800K


**30W**  
**2400**  
 Lumens

Product code	FL30-B2	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	2400lm	Body Color	Black


 SKU: 5948 4500K  
 SKU: 5949 2800K

**50W**  
**4000**  
 Lumens


Product code	FL50-B2	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 220-265V	IP Rating	IP65
Flux	4000lm	Body Color	Black





SKU: 5950 6000K





LED SMD FLOODLIGHT PF>0.9  
CCT LIGHT - Black Body




<b>50W</b> 5000 Lumens	Product code Watts Input Voltage Flux	FL50-A7 50W AC : 200-277V 5 000lm	Beam Angle CRI IP Rating Body Color	120° Ra>80 IP66 Black
---------------------------	--	--	--	--------------------------------





<b>100W</b> 10000 Lumens	Product code Watts Input Voltage Flux	FL100-A7 100W AC : 200-277V 10000lm	Beam Angle CRI IP Rating Body Color	120° Ra>80 IP66 Black
-----------------------------	--	--	--	--------------------------------




<b>150W</b> 15000 Lumens	Product code Watts Input Voltage Flux	FL150-A7 150W AC : 200-277V 15000lm	Beam Angle CRI IP Rating Body Color	120° Ra>80 IP66 Black
-----------------------------	--	--	--	--------------------------------




<b>200W</b> 20000 Lumens	Product code Watts Input Voltage Flux	FL200-A7 200W AC : 200-277V 20000lm	Beam Angle CRI IP Rating Body Color	120° Ra>80 IP66 Black
-----------------------------	--	--	--	--------------------------------

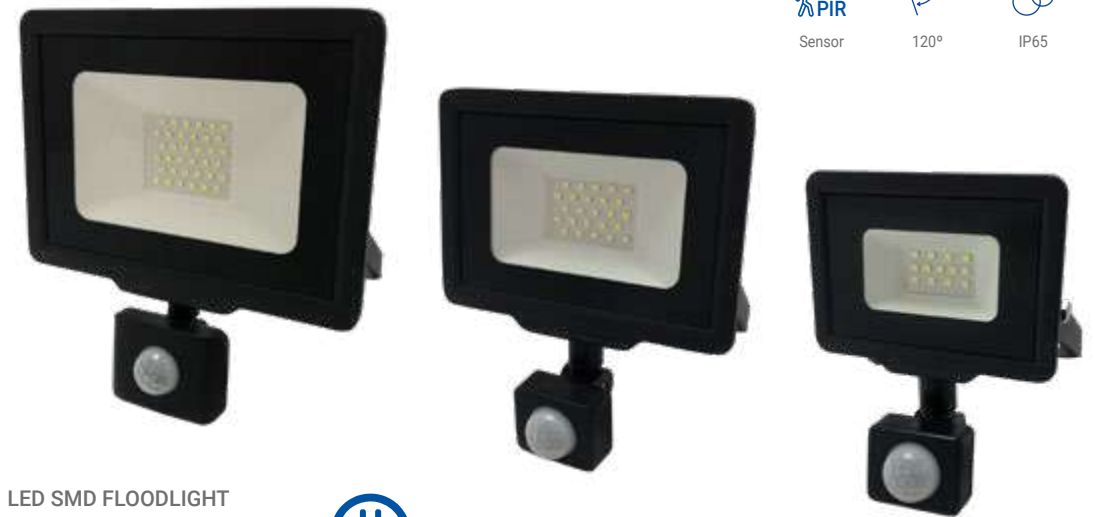


LED SMD FLOODLIGHT  
CITY LINE - Black Body  
With PIR Sensor




<b>10W</b> 800 Lumens	Product code Watts Input Voltage Flux	FL10-B2 10W AC : 220-265V 800lm	Beam Angle CRI IP Rating Body Color	120° Ra>80 IP65 Black
--------------------------	--	--	--	--------------------------------




<b>20W</b> 1600 Lumens	Product code Watts Input Voltage Flux	FL20-B2 20W AC : 220-265V 1600lm	Beam Angle CRI IP Rating Body Color	120° Ra>80 IP65 Black
---------------------------	--	---	--	--------------------------------



<b>30W</b> 2400 Lumens	Product code Watts Input Voltage Flux	FL30-B2 30W AC : 220-265V 2400lm	Beam Angle CRI IP Rating Body Color	120° Ra>80 IP65 Black
---------------------------	--	---	--	--------------------------------



<b>50W</b> 4000 Lumens	Product code Watts Input Voltage Flux	FL50-B2 50W AC : 220-265V 4000lm	Beam Angle CRI IP Rating Body Color	120° Ra>80 IP65 Black
---------------------------	--	---	--	--------------------------------





LED SMD FLOODLIGHT  
On Stand - Foldable




**20W**



1600  
Lumens

Product code	FL20-A8	Beam Angle	120°
Watts	20W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	1600lm	Body Color	Yellow




SKU: 5403  
6000K

**30W**



2400  
Lumens

Product code	FL30-A8	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	2400lm	Body Color	Yellow




SKU: 5404  
6000K

**50W**



4000  
Lumens

Product code	FL50-A8	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	4000lm	Body Color	Yellow



SKU: 5405  
6000K



PORTABLE LED SMD FLOODLIGHT  
Rechargeable + Battery



Input Voltage	AC : 200-240V	Body Color	Yellow+Black
Beam Angle	120°	CRI	Ra>80
IP Rating	IP44	Dimension 10W	123x133x218mm
		Dimension 20W	156x163x250mm

**10W**



600  
Lumens



3.7V 2200mAh

SKU: 5401  
6000K

**20W**



1200  
Lumens



3.7V 4400mAh

SKU: 5402  
6000K



Solar Power



1850  
Lumens



120°



IP65

Flux	1850lm	Beam Angle	120°
Battery	3.7V 8Ah	CRI	Ra>80
Body Color	Yellow	Dimension	215x175x55mm



LED SMD PORTABLE FLOODLIGHT  
Solar Panel Power: 6V/2.3W

- SOS Emergency Light
- Power Bank Function
- USB Ports



3.7V 8Ah

SKU: 5464  
CCT  
6000K 4500K 3000K






## LED SMD FLOODLIGHT

**Black Body -Green Light****10W**800  
Lumens


Product code	FL10-B3	Beam Angle	90°
Watts	10W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	800lm	Body Color	Black

SKU: 5751  
Green


## LED RGB SMD FLOODLIGHT

**Black Body + Remote Control****10W**800  
Lumens


Product code	FL10-B4	Beam Angle	120°
Watts	10W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	800lm	Body Color	Black

SKU: 5754  
RGB**20W**1600  
Lumens


Product code	FL20-B3	Beam Angle	90°
Watts	20W	CRI	Ra>70
Product code	AC : 220-240V	IP Rating	IP65
Flux	1600lm	Body Color	Black

SKU: 5752  
Green**30W**2400  
Lumens


Product code	FL30-B4	Beam Angle	120°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	2400lm	Body Color	Black

SKU: 5755  
RGB**30W**2400  
Lumens

Product code	FL30-B3	Beam Angle	90°
Watts	30W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	2400lm	Body Color	Black

SKU: 5753  
Green**50W**4000  
Lumens

Product code	FL50-B4	Beam Angle	120°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	4000lm	Body Color	Black


SKU: 5756  
RGB



LED SMD FLOODLIGHT  
**High Power - Black Body**




<b>150W</b>  <b>13500</b> Lumens	Product code	FL150-B3	Beam Angle	90°
	Watts	150W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	13500lm	Body Color	Black



SKU: 5736    SKU: 5737  
■ 6000K    ■ 4500K

<b>200W</b>  <b>18000</b> Lumens	Product code	FL200-B3	Beam Angle	90°
	Watts	200W	CRI	Ra>80
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	18000lm	Body Color	Black




SKU: 5738    SKU: 5739  
■ 6000K    ■ 4500K



LED SMD5730 FLOODLIGHT **PF>0.9**  
**Dual Voltage With Terminal Block**



<b>100W</b>  <b>9000</b> Lumens	Product code	FL100-A9	Beam Angle	120°
	Watts	100W	CRI	Ra>80
	Input Voltage	AC : 85-265V	IP Rating	IP65
	Flux	9000lm	Body Color	Black



SKU: 5277  
■ 6000K




**TRIPOD FOR FLOODLIGHTS  
With Cross Bar**

Product code OT1-B9  
 Body Color Yellow , Black  
 Material Iron  
 Maximum size 157x64x64cm  
 Height Adjustment: 64-157cm  
 Sections: 3 Pcs

SKU: 6686 BLACK BODY ■  
 SKU: 6687 YELLOW BODY ■

**Terminal Block  
Waterproof Box**

Rated Voltage 250V  
 Material Flame Retardant PP  
 Wire Range 0.5-1.5mm<sup>2</sup>  
 Wire Range-T 0.5-2.5mm<sup>2</sup>  
 Rated Current 16A


**Terminal Blocks Professional  
Metal-Waterproof Box**

Rated Voltage 450V  
 Material Cast Aluminium  
 Body Size 80x75x60mm  
 Rated Current 24A


**Lever Connectors  
Easy Clip**

Rated voltage 450V  
 Rated current 32A  
 Wire range 18-12AWG 0.08--2.5mm<sup>2</sup>  
 Ambient temperature -40°C~+105°C  
 Strip length 12-13mm

SKU: 6501  
 SKU: 6502  
 SKU: 6503  
 SKU: 6504  
 SKU: 6505

Rated voltage 450V  
 Rated current 32A  
 Housing material: thermoplastic, 94V-0  
 Flame-retardant  
 Temperature: 110 degrees Celsius  
 Wire range: #24 to #12 AWG solid wires

SKU: 6506  
 SKU: 6507  
 SKU: 6508

**Terminal Blocks Professional  
Polycarbonate-Waterproof Box**

Rated Voltage 250V  
 Rated Current 16A  
 Material Polycarbonate  
 Body Size 120x35x50 mm

Rated Voltage 450V  
 Rated Current 24A  
 Material Polycarbonate  
 Body Size 120x35x70 mm


**Terminal Block Splitter  
Waterproof Box**

Rated Voltage 250V  
 Material Polypropylene 94 V2  
 Wire Range 0.5-2.5mm<sup>2</sup>  
 Rated Current 16A


**Terminal Block Splitter  
Waterproof Box**

Rated Voltage 450V  
 Material Polypropylene 94 V2  
 Wire Range 0.5-4mm<sup>2</sup>  
 Rated Current 24A


**Terminal Block Splitter  
Waterproof Box**

Rated Voltage 450V  
 Material Polypropylene 94 V2  
 Wire Range 0.5-4mm<sup>2</sup>  
 Rated Current 24A


**Terminal Block Splitter  
Waterproof Box**

Rated Voltage 450V  
 Material Polypropylene 94 V2  
 Wire Range 0.5-4mm<sup>2</sup>  
 Rated Current 24A





**LED STREET AND INDUSTRIAL LIGHTS**



LED industrial lights are series of highly efficient, reliable and easy to install products for production sites, warehouses or specialised areas. With different types – low or high bays, bulbs or linear lighting fixtures. These products will meet all industry standards and cover any lighting needs.

**Features:**

- Up to 80% power saving
- Variety of shapes and types
- Long lifetime and reliability
- Different types of mounting options
- Comply with industrial standards

**Application:**

- Production sites and warehouses
- Industrial places and factories
- Special lighting requirements





**NEW**



LED STREET LIGHT  
**Solar Power + Battery**  
**Remote+ PIR SENSOR**



<p><b>1200</b> Lumens</p>	Product code	SL8-A2	Beam Angle	120°	<p>231mm 413x47mm</p>	<p>SKU: 9145 6000K</p>
	Watts	8W	CRI	Ra>70		
	Battery	5V 8AH	IP Rating	IP65		
	Flux	1200lm	Body Color	Black		
<p><b>1800</b> Lumens</p>	Product code	SL12-A2	Beam Angle	120°	<p>231mm 511x47mm</p>	<p>SKU: 9146 6000K</p>
	Watts	12W	CRI	Ra>70		
	Battery	5V 12AH	IP Rating	IP65		
	Flux	1200lm	Body Color	Black		
<p><b>2700</b> Lumens</p>	Product code	SL20-A2	Beam Angle	120°	<p>251mm 722x47mm</p>	<p>SKU: 9147 6000K</p>
	Watts	20W	CRI	Ra>70		
	Battery	5V 18AH	IP Rating	IP65		
	Flux	2700lm	Body Color	Black		



LED SOLAR INDUSTRIAL LIGHTS

Remote Control



**30W**

**4300**  
Lumens

Power Solar	5V/30W	CRI	Ra>80
Beam Angle	60°	IP Rating	IP66
Flux	4300lm	Body Color	Black



SKU: 9141  
6000K

**40W**

**5200**  
Lumens

Power Solar	5V/40W	CRI	Ra>80
Beam Angle	60°	IP Rating	IP66
Flux	5200lm	Body Color	Black



SKU: 9142  
6000K

**50W**

**6300**  
Lumens

Power Solar	5V/50W	CRI	Ra>80
Beam Angle	60°	IP Rating	IP66
Flux	6300lm	Body Color	Black



SKU: 9143  
6000K




LED STREET LIGHT

Solar Power + Battery



**500**  
Lumens


Product code	SL8-B6	Beam Angle	120°
Watts	8W	CRI	Ra>70
Battery	3.2V 5AH	IP Rating	IP65
Flux	500lm	Body Color	Black



SKU: 9126  
6000K

**1200**  
Lumens


Product code	SL10-B6	Beam Angle	120°
Watts	10W	CRI	Ra>70
Battery	3.2V 10AH	IP Rating	IP65
Flux	1200lm	Body Color	Black



SKU: 9127  
6000K

**1800**  
Lumens


Product code	SL15-B6	Beam Angle	120°
Watts	15W	CRI	Ra>70
Battery	3.2V 15AH	IP Rating	IP65
Flux	1800lm	Body Color	Black



SKU: 9128  
6000K

**2400**  
Lumens

Product code	SL18-B6	Beam Angle	120°
Watts	18W	CRI	Ra>70
Battery	3.2V 20AH	IP Rating	IP65
Flux	2400lm	Body Color	Black



SKU: 9129  
6000K



**LED STREET LIGHT**  
**8W Solar Power + Battery**

Watts	8W	CRI	Ra>70
Battery	3.2V / 16.5Ah	IP Rating	IP65
Flux	950lm	Dimension	490x240x65mm
Beam Angle	120°	Body Color	Black

\* Intelligent Light Control SKU: 9135  
 \* Time Switch ■ 6000K



Wireless Remote Control

950 Lumens  
 Battery  
 >1500 Cycles icon"/> >1500 Cycles  
 Solar Power  
 IP65



**LED STREET LIGHT**  
**35W Solar Power + Battery**

Watts	35W	CRI	Ra>70
Battery	6.4V / 16.5Ah	IP Rating	IP65
Flux	2600lm	Dimension	490x240x65mm
Beam Angle	120°	Body Color	Black

\* Intelligent Light Control SKU: 9137  
 \* Time Switch ■ 6000K



Wireless Remote Control

2600 Lumens  
 Battery  
 >1500 Cycles icon"/> >1500 Cycles  
 Solar Power  
 IP65



**LED STREET LIGHT**  
**12W Solar Power + Battery**

Watts	12W	CRI	Ra>70
Battery	3.2V / 22Ah	IP Rating	IP65
Flux	1200lm	Dimension	650x250x65mm
Beam Angle	120°	Body Color	Black

\* Intelligent Light Control SKU: 9136  
 \* Time Switch ■ 6000K



Wireless Remote Control

1200 Lumens  
 Battery  
 >1500 Cycles icon"/> >1500 Cycles  
 Solar Power  
 IP65



**LED STREET LIGHT**  
**40W Solar Power + Battery**

Watts	40W	CRI	Ra>70
Battery	6.4V / 22h	IP Rating	IP65
Flux	3000lm	Dimension	490x240x65mm
Beam Angle	120°	Body Color	Black

\* Intelligent Light Control SKU: 9138  
 \* Time Switch ■ 6000K



Wireless Remote Control

3000 Lumens  
 Battery  
 >1500 Cycles icon"/> >1500 Cycles  
 Solar Power  
 IP65

**NEW**



**PREMIUM LINE**

LED STREET LIGHT **PF>0.9**  
**High Lumens**



5 Years Warranty




150 Lumens/W



**100W**  
15000 Lumens


Product code	SL100-A9	Beam Angle	75x130°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	15000lm	Body Color	Gray



SKU:9227 6000K  
SKU:9225 4000K

**150W**  
22500 Lumens


Product code	SL150-A9	Beam Angle	75x130°
Watts	100W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	22500lm	Body Color	Gray



SKU:9228 6000K  
SKU:9226 4000K

**200W**  
30000 Lumens

Product code	SL200-A9	Beam Angle	75x130°
Watts	200W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	30000lm	Body Color	Gray



SKU:9229 6000K

**NEW**



**PREMIUM LINE**

LED STREET LIGHT **PF>0.9**  
**High Lumens**



5 Years Warranty




HIGH Lumens



**30W**  
3600 Lumens


Product code	SL30-A9	Beam Angle	75x130°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	3600lm	Body Color	Gray



SKU:9250 6000K  
SKU:9251 4000K  
SKU:9252 3000K

**50W**  
6000 Lumens


Product code	SL50-A9	Beam Angle	75x130°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	6000lm	Body Color	Gray



SKU:9241 6000K  
SKU:9242 4000K  
SKU:9243 3000K

**100W**  
12000 Lumens


Product code	SL100-A9	Beam Angle	75x130°
Watts	100W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	12000lm	Body Color	Gray



SKU:9244 6000K  
SKU:9245 4000K  
SKU:9246 3000K

**200W**  
24000 Lumens

Product code	SL200-A9	Beam Angle	75x130°
Watts	200W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	24000lm	Body Color	Gray



SKU:9247 6000K  
SKU:9248 4000K  
SKU:9249 3000K



**NEW**




LED STREET LIGHT PF>0.9  
**Slim Line**

**SANAN**  
CHIP



**30W**  
3000 Lumens

Product code	SL30-A9	Beam Angle	75x130°
Watts	30W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	3000lm	Body Color	Black



SKU:9231 6000K  
SKU:9232 4000K

**NEW**




LED STREET LIGHT PF>0.9  
**Slim Line - Sensor Day/Night**

**SANAN**  
CHIP



**30W**  
3000 Lumens


Product code	SL30-A9	Beam Angle	75x130°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	3000lm	Body Color	Black



SKU:9237 4000K

**50W**  
5000 Lumens


Product code	SL50-A9	Beam Angle	75x130°
Watts	50W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	5000lm	Body Color	Black



SKU:9233 6000K  
SKU:9234 4000K

**50W**  
5000 Lumens


Product code	SL50-A9	Beam Angle	75x130°
Watts	100W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	5000lm	Body Color	Black



SKU:9238 4000K

**100W**  
10000 Lumens


Product code	SL100-A9	Beam Angle	75x130°
Watts	100W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	10000lm	Body Color	Black



SKU:9235 6000K  
SKU:9236 4000K

**100W**  
10000 Lumens

Product code	SL100-A9	Beam Angle	75x130°
Watts	200W	CRI	Ra>80
Input Voltage	AC : 180-265V	IP Rating	IP65
Flux	10000lm	Body Color	Black



SKU:9239 4000K




Adjusting angle

**LED STREET LIGHT PF>0.9**  
**High Lumens**




<b>50W</b> 5000 Lumens	Product code Watts Input Voltage Flux	SL50-A9 50W AC : 220-240V 5000lm	Beam Angle CRI IP Rating Body Color	75x135° Ra>70 IP65 Gray
---------------------------	--	---	--	----------------------------------




SKU: 9221  
6000K

<b>100W</b> 10000 Lumens	Product code Watts Input Voltage Flux	SL100-A9 100W AC : 220-240V 10000lm	Beam Angle CRI IP Rating Body Color	75x135° Ra>70 IP65 Gray
-----------------------------	--	--	--	----------------------------------




SKU: 9222  
6000K

<b>150W</b> 15000 Lumens	Product code Watts Input Voltage Flux	SL150-A9 150W AC : 220-240V 15000lm	Beam Angle CRI IP Rating Body Color	75x135° Ra>70 IP65 Gray
-----------------------------	--	--	--	----------------------------------



SKU: 9223  
6000K

<b>200W</b> 20000 Lumens	Product code Watts Input Voltage Flux	SL200-A9 200W AC : 220-240V 20000lm	Beam Angle CRI IP Rating Body Color	75x135° Ra>70 IP65 Gray
-----------------------------	--	--	--	----------------------------------




SKU: 9224  
6000K

**LED STREET LIGHT PF>0.9**  
**High Lumens**




<b>20W</b> 2000 Lumens	Product code Watts Input Voltage Flux	SL20-A9 20W AC : 220-240V 2000lm	Beam Angle CRI IP Rating Body Color	75x135° Ra>70 IP65 Gray
---------------------------	--	---	--	----------------------------------




SKU: 9216 6000K  
SKU: 9217 4500K  
SKU: 9218 2700K

<b>30W</b> 3000 Lumens	Product code Watts Input Voltage Flux	SL30-A9 30W AC : 220-240V 3000lm	Beam Angle CRI IP Rating Body Color	75x135° Ra>70 IP65 Gray
---------------------------	--	---	--	----------------------------------




SKU: 9201 6000K  
SKU: 9202 4500K  
SKU: 9203 2700K

<b>150W</b> 15000 Lumens	Product code Watts Input Voltage Flux	SL150-A9 150W AC : 220-240V 15000lm	Beam Angle CRI IP Rating Body Color	75x135° Ra>70 IP65 Gray
-----------------------------	--	--	--	----------------------------------



SKU: 9210 6000K  
SKU: 9212 2700K

<b>200W</b> 20000 Lumens	Product code Watts Input Voltage Flux	SL200-A9 200W AC : 220-240V 20000lm	Beam Angle CRI IP Rating Body Color	75x135° Ra>70 IP65 Gray
-----------------------------	--	--	--	----------------------------------



SKU: 9213 6000K



**PREMIUM LINE**

LED STREET LIGHT **PF>0.95**  
**High Lumens-Moso Driver**



**5** Years  
Warranty

**150**  
Lumens/W

**HIGH**  
Lumens


**120°**

**IP65**

**120W**

**18000**  
Lumens

Product code	SL120-A7	Beam Angle	120°
Watts	120W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	18000lm	Protection	Class 1



SKU: 9180  
5700K



LED STREET LIGHT **PF>0.95**  
**High Lumens-Moso Driver**

**80W**

**11200**  
Lumens

Product code	SL80-A8	Beam Angle	120°
Watts	80W	CRI	Ra>70
Input Voltage	AC : 100-240V	IP Rating	IP66
Flux	11200lm	Protection	Class 1

SKU: 9196  
5700K

**100W**

**14000**  
Lumens

Product code	SL50-A8	Beam Angle	120°
Watts	100W	CRI	Ra>70
Input Voltage	AC : 100-240V	IP Rating	IP66
Flux	14000lm	Protection	Class 1

SKU: 9197  
5700K

**150W**

**21000**  
Lumens

Product code	SL150-A8	Beam Angle	120°
Watts	150W	CRI	Ra>70
Input Voltage	AC : 100-240V	IP Rating	IP66
Flux	21000lm	Protection	Class 1

SKU: 9198  
5700K

**180W**

**25200**  
Lumens

Product code	SL180-A8	Beam Angle	120°
Watts	180W	CRI	Ra>70
Input Voltage	AC : 100-240V	IP Rating	IP66
Flux	25200lm	Protection	Class 1

SKU: 9199  
5700K

**MOSO**  
Driver

**5** Years  
Warranty

**140**  
Lumens/W

**HIGH**  
Lumens

**IP66**



Adjusting angle



**LED STREET LIGHT PF>0.9**  
**2 pcs BOX**



2 PCS  
BOX

**5**  
Years  
Warranty

**HIGH**  
Lumens



120°




IP65

**50W**

**7500**  
Lumens

Product code	SL50-A2	Beam Angle	120°
Watts	50W	CRI	Ra>70
Input Voltage	AC : 100-240V	IP Rating	IP65
Flux	7500lm	Protection	Class 1



SKU: 9157  
■ 5700K



**LED STREET LIGHT PF>0.9**  
**2 pcs BOX**

**HIGH**  
Lumens



120°




IP65

**20W**

**2000**  
Lumens

Product code	SL20-A1	Beam Angle	120°
Watts	20W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	2000lm	Protection	Class 2




SKU: 9171  
■ 6000K

**50W**

**5000**  
Lumens

Product code	SL50-A1	Beam Angle	120°
Watts	50W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	5000lm	Protection	Class 2




SKU: 9172  
■ 6000K

**80W**

**8000**  
Lumens

Product code	SL80-A1	Beam Angle	120°
Watts	80W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	8000lm	Protection	Class 2



SKU: 9173  
■ 6000K






LED STREET LIGHT **PF>0.9**  
**Bridgelux 3030 Chips**

5 Years Warranty  
 HIGH Lumens  
 120° Beam Angle  
 IP65 Protection

**150W**  
 14250 Lumens


Product code	SL150-A3	Beam Angle	120°
Watts	150W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	14250lm	Protection	Class 1



SKU: 9181  
 5700K

**200W**  
 19000 Lumens

Product code	SL200-A3	Beam Angle	120°
Watts	200W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	19000lm	Protection	Class 1



SKU: 9182  
 5700K

**Adapter Matt Grey Φ60mm to Φ40mm**

SKU: 9118



**Adapter Φ60mm to Φ60 mm Adjustable Angle 90°**

SKU: 9119




LED INDUSTRIAL LIGHTS **PF>0.9**  
**Stadium Floodlight**

5 Years Warranty  
 HIGH Lumens  
 90° Beam Angle  
 IP65 Protection

**100W**  
 10000 Lumens


Product code	SL100-A5	Beam Angle	90°
Watts	100W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	10000lm	Protection	Class 1



SKU: 9175  
 5700K

**150W**  
 16500 Lumens


Product code	SL150-A5	Beam Angle	90°
Watts	150W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	16500lm	Protection	Class 1



SKU: 9176  
 5700K

**240W**  
 26400 Lumens


Product code	SL240-A5	Beam Angle	90°
Watts	240W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	26400lm	Protection	Class 1



SKU: 9177  
 5700K

**480W**  
 68000 Lumens

Product code	SL480-A5	Beam Angle	90°
Watts	480W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	68000lm	Protection	Class 1



SKU: 9178  
 5700K



**NEW**



**PREMIUM LINE**

LED INDUSTRIAL LIGHTS **PF>0.9**


**UFO High Bay**



**100W**

**15000**  
Lumens

Watts	100W	Beam Angle	90°
Input Voltage	AC :180-265V	IP Rating	IP65
Flux	15000lm	Body Color	Black




SKU: 8227  
6000K    SKU: 8248  
6000K

**150W**

**30000**  
Lumens

Watts	150W	Beam Angle	90°
Input Voltage	AC :180-265V	IP Rating	IP65
Flux	30000lm	Body Color	Black




SKU: 8228  
6000K    SKU: 8249  
6000K

**200W**

**45000**  
Lumens

Watts	200W	Beam Angle	90°
Input Voltage	AC :180-265V	IP Rating	IP65
Flux	45000lm	Body Color	Black



SKU: 8229  
6000K    SKU: 8250  
6000K



**NEW**



LED INDUSTRIAL LIGHTS **PF>0.9**


**UFO High Bay**



**50W**

**5000**  
Lumens

Watts	50W	Beam Angle	120°
Input Voltage	AC :180-265V	IP Rating	IP65
Flux	5000lm	Body Color	Black




SKU: 8239  
6000K    SKU: 8240  
4000K

**100W**

**10000**  
Lumens

Watts	100W	Beam Angle	120°
Input Voltage	AC :180-265V	IP Rating	IP65
Flux	10000lm	Body Color	Black



SKU: 8241  
6000K    SKU: 8242  
4000K

**150W**

**15000**  
Lumens

Watts	150W	Beam Angle	120°
Input Voltage	AC :180-265V	IP Rating	IP65
Flux	15000lm	Body Color	Black



SKU: 8243  
6000K    SKU: 8244  
4000K

**200W**

**20000**  
Lumens

Watts	200W	Beam Angle	120°
Input Voltage	AC :180-265V	IP Rating	IP65
Flux	20000lm	Body Color	Black




SKU: 8245  
6000K    SKU: 8246  
4000K

**300W**

**30000**  
Lumens

Watts	300W	Beam Angle	120°
Input Voltage	AC :180-265V	IP Rating	IP65
Flux	30000lm	Body Color	Black



SKU: 8247  
6000K




LED INDUSTRIAL LIGHTS **PF>0.9**  
**SLIM LINE**



**50W**



Watts	50W	Beam Angle	90°
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	5000lm	Body Color	Grey




SKU: 8231 6000K  
SKU: 8232 4500K

**100W**



Watts	100W	Beam Angle	90°
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	10000lm	Body Color	Grey




SKU: 8233 6000K  
SKU: 8234 4500K

**150W**



Watts	150W	Beam Angle	90°
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	15000lm	Body Color	Grey




SKU: 8235 6000K  
SKU: 8236 4500K

**200W**




Watts	200W	Beam Angle	90°
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	20000lm	Body Color	Grey



SKU: 8237 6000K  
SKU: 8238 4500K


LED INDUSTRIAL LIGHTS **PF>0.9**  
**High Lumens**



**100W**



Product code	HB100-B1	Beam Angle	90°
Watts	100W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	10000lm	Body Color	Black




SKU: 8221 White Light 6000K  
SKU: 8222 Neutral Light 4500K

**150W**



Product code	HB150-B1	Beam Angle	90°
Watts	150W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	15000lm	Body Color	Black




SKU: 8223 White Light 6000K  
SKU: 8224 Neutral Light 4500K

**200W**



Product code	HB200-B1	Beam Angle	90°
Watts	200W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	20000lm	Body Color	Black



SKU: 8225 White Light 6000K  
SKU: 8226 Neutral Light 4500K




LED INDUSTRIAL LIGHT HIGH LUMEN  
**HIGH BAY PF>0.9**



**100W**  
18000  
Lumens


Product code	HB110-A1	Beam Angle	90°
Watts	100W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	18000lm	Protection	Class 1



SKU: 8190  
■ 5700K

**150W**  
27000  
Lumens


Product code	HB150-A3	Beam Angle	90°
Watts	150W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	27000lm	Protection	Class 1



SKU: 8191  
■ 5700K

**200W**  
36000  
Lumens

Product code	HB210-A1	Beam Angle	90°
Watts	200W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	36000lm	Protection	Class 1



SKU: 8192  
■ 5700K




LED INDUSTRIAL LIGHT  
**HIGH BAY UFO PF>0.9**



**100W**  
11000  
Lumens


Product code	HB100-A5	Beam Angle	90°
Watts	100W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	11000lm	Protection	Class 1



SKU: 8140  
■ 5700K

**200W**  
22000  
Lumens

Product code	HB200-A5	Beam Angle	90°
Watts	200W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	22000lm	Protection	Class 1



SKU: 8126  
■ 5700K






**HIGH**  
Lumens

90°

IP65

LED INDUSTRIAL LIGHT  
**HIGH BAY - UFO - 90°**

<b>50W</b>  <b>5000</b> Lumens	Product code	HB50-A8	Beam Angle	90°
	Watts	50W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	5000lm	Protection	Class 1



SKU: 8201    SKU: 8202  
6000K    4500K




**HIGH**  
Lumens

120°

IP65


LED INDUSTRIAL LIGHT  
**HIGH BAY - UFO - 120°**

<b>50W</b>  <b>5000</b> Lumens	Product code	HB50-A8	Beam Angle	120°
	Watts	50W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	5000lm	Protection	Class 1




SKU: 8211    SKU: 8212  
6000K    4500K

<b>100W</b>  <b>10000</b> Lumens	Product code	HB100-A8	Beam Angle	90°
	Watts	100W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	10000lm	Protection	Class 1




SKU: 8203    SKU: 8204  
6000K    4500K

<b>100W</b>  <b>10000</b> Lumens	Product code	HB100-A8	Beam Angle	120°
	Watts	100W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	10000lm	Protection	Class 1




SKU: 8213    SKU: 8214  
6000K    4500K

<b>150W</b>  <b>15000</b> Lumens	Product code	HB150-A8	Beam Angle	90°
	Watts	150W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	15000lm	Protection	Class 1




SKU: 8205    SKU: 8206  
6000K    4500K

<b>150W</b>  <b>15000</b> Lumens	Product code	HB150-A8	Beam Angle	120°
	Watts	150W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	15000lm	Protection	Class 1




SKU: 8215    SKU: 8216  
6000K    4500K

<b>200W</b>  <b>20000</b> Lumens	Product code	HB200-A8	Beam Angle	90°
	Watts	200W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	20000lm	Protection	Class 1



SKU: 8207    SKU: 8208  
6000K    4500K

<b>200W</b>  <b>20000</b> Lumens	Product code	HB200-A8	Beam Angle	120°
	Watts	200W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	20000lm	Protection	Class 1



SKU: 8217    SKU: 8218  
6000K    4500K




LED INDUSTRIAL LIGHT  
**HIGH BAY - UFO 2 - 90°**



LED INDUSTRIAL LIGHT  
**HIGH BAY - UFO 2 - 120°**




<b>100W</b>  <b>8500</b> Lumens	Product code	HB100-A6	Beam Angle	90°
	Watts	100W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	8500lm	Protection	Class 1




SKU: 8168    SKU: 8169  
■ 6000K    ■ 4500K

<b>100W</b>  <b>8500</b> Lumens	Product code	HB100-A6	Beam Angle	120°
	Watts	100W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	8500lm	Protection	Class 1




SKU: 8177  
■ 4500K

<b>150W</b>  <b>12750</b> Lumens	Product code	HB150-A6	Beam Angle	90°
	Watts	150W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	12750lm	Protection	Class 1




SKU: 8170    SKU: 8171  
■ 6000K    ■ 4500K

<b>150W</b>  <b>12750</b> Lumens	Product code	HB150-A6	Beam Angle	120°
	Watts	150W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	12750lm	Protection	Class 1



SKU: 8178    SKU: 8179  
■ 6000K    ■ 4500K

<b>200W</b>  <b>17000</b> Lumens	Product code	HB200-A6	Beam Angle	90°
	Watts	200W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	17000lm	Protection	Class 1



SKU: 8172  
■ 6000K




LED INDUSTRIAL LIGHT

**Linear High Bay**



**50W**  
5000  
Lumens


Product code	HB50-A2	Beam Angle	120*60°
Watts	50W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP44
Flux	5000lm	Body Color	Class 1



SKU: 8151  
6000K 4500K

**100W**  
10000  
Lumens


Product code	HB100-A2	Beam Angle	120*60°
Watts	50W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP44
Flux	10000lm	Body Color	Black



SKU: 8153  
6000K 4500K

**150W**  
15000  
Lumens


Product code	HB150-A2	Beam Angle	120*60°
Watts	50W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP44
Flux	15000lm	Body Color	Black



SKU: 8155  
6000K 4500K

**200W**  
20000  
Lumens

Product code	HB200-A2	Beam Angle	120*60°
Watts	50W	CRI	Ra>70
Input Voltage	AC : 220-240V	IP Rating	IP44
Flux	20000lm	Body Color	Black



SKU: 8157  
6000K 4500K




LED INDUSTRIAL Bulb **PF>0.9**  
**40W E27**



Product code	HB40-A1	Socket	E27
Watts	40W	CRI	Ra>80
Input Voltage	AC : 180-264V	IP Rating	IP20
Flux	4100lm	Dimension	ø90x212 mm
Beam Angle	270°	Dimmable	NO

SKU: 225  
6000K 4500K





LED INDUSTRIAL Bulb **PF>0.9**  
**50W E40**



Product code	HB50-A3	Socket	E40
Watts	50W	CRI	Ra>70
Input Voltage	AC : 110-264V	IP Rating	IP20
Flux	5000lm	Dimension	ø75x235 mm
Beam Angle	270°	Dimmable	NO


SKU: 221  
6000K



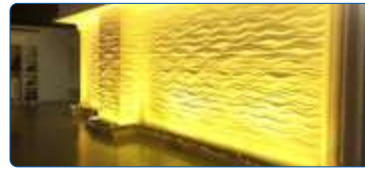


**LED Wall Washers**  
**30°**

<p><b>9W</b></p> <p>700 Lumens</p>	Product code	WW9-A1	Beam Angle	30°
	Watts	9W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	700lm	Body Color	Black




SKU: 7134 6000K  
SKU: 7131 2700K

<p><b>18W</b></p> <p>1400 Lumens</p>	Product code	WW18-A1	Beam Angle	30°
	Watts	18W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	1400lm	Protection	Black



SKU: 7135 6000K  
SKU: 7132 2700K

<p><b>36W</b></p> <p>2800 Lumens</p>	Product code	WW36-A1	Beam Angle	30°
	Watts	36W	CRI	Ra>70
	Input Voltage	AC : 220-240V	IP Rating	IP65
	Flux	2800lm	Protection	Black



SKU: 7136 6000K  
SKU: 7133 2700K

**NEW**



**LED Mirror/Wall Light**  
**14W**



Watts	14W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP20
Flux	910lm	Dimension	595 mm
Beam Angle	120°	Body Color	White
Material	Aluminium	Dimmable	NO

SKU: 7551 4000K  
SKU: 7552 3000K



**NEW**



**LED Mirror/Wall Light**  
**14W**



Watts	14W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP20
Flux	910lm	Dimension	595 mm
Beam Angle	120°	Body Color	Black
Material	Aluminium	Dimmable	NO

SKU: 7553 4000K  
SKU: 7554 3000K





## LED WALL AND STEP LIGHTS




You can even make your outdoor areas radiate in the worst of weather conditions: Our exterior use wall lights are robust, energy-efficient and powerful. You can choose between different designs and set stylish accents.

#### Features:

- Up to 80% power saving
- Home, garden or park use
- Different forms, shapes and colours
- Discrete, spot or main lighting
- Easy installation and long lifecycle
- With or without bulbs

#### Application:

- Wall or pylon mountable
- Lanes, alleys or pathways
- Gardens and parks

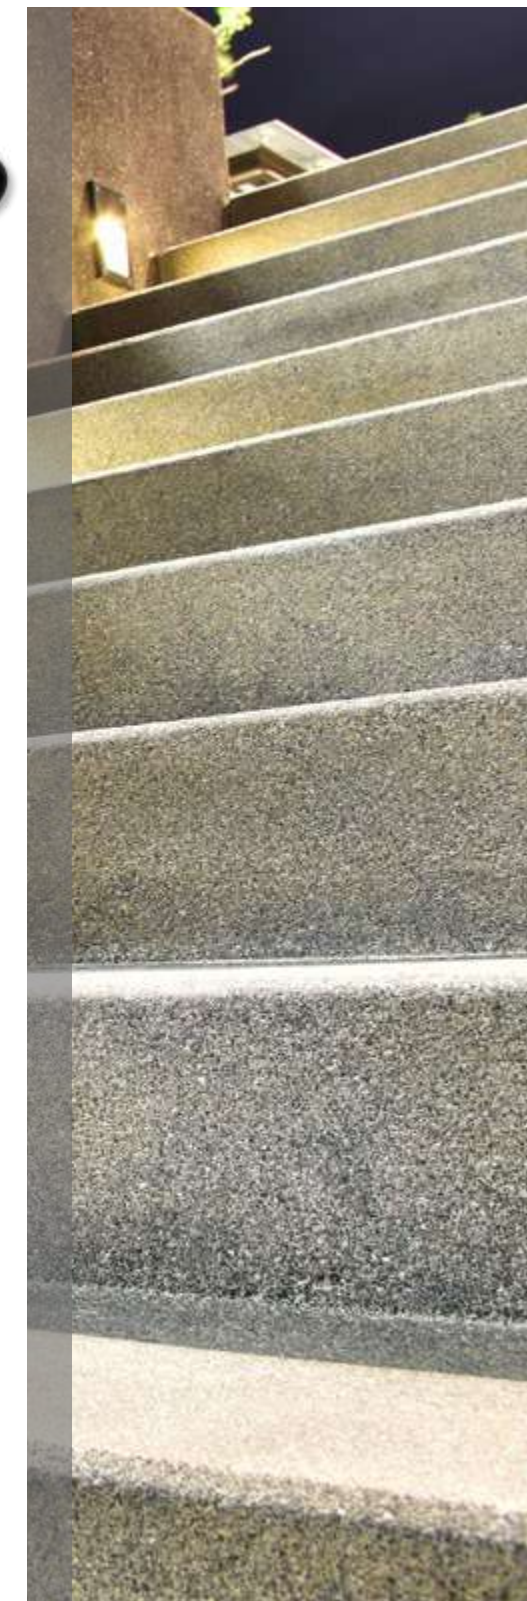


 LED Wall Light - Black  
**2 Lens 4W**


Watts	4W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	340lm	Dimension	106x80x38 mm
Beam Angle	48°	Body Color	Black
Material	Aluminium	Dimmable	NO

 SKU: 7407  
 ■ 3000K

 LED Wall Light - Black  
**2 Lens 4W**


Watts	4W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	340lm	Dimension	106x80x38 mm
Beam Angle	48°	Body Color	White
Material	Aluminium	Dimmable	NO

 SKU: 7408  
 ■ 3000K

 LED Wall Light - Black  
**3 Lens 6W**


Watts	6W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	510lm	Dimension	158x80x40 mm
Beam Angle	48°	Body Color	Black
Material	Aluminium	Dimmable	NO

 SKU: 7409  
 ■ 3000K

 LED Wall Light - Black  
**3 Lens 6W**


Watts	6W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	510lm	Dimension	158x80x40 mm
Beam Angle	48°	Body Color	White
Material	Aluminium	Dimmable	NO

 SKU: 7410  
 ■ 3000K

 LED Wall Light - Black  
**2 Lens 8W**


Watts	8W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	680lm	Dimension	210x80x48 mm
Beam Angle	48°	Body Color	Black
Material	Aluminium	Dimmable	NO

 SKU: 7411  
 ■ 3000K

 LED Wall Light - Black  
**2 Lens 8W**


Watts	8W	CRI	Ra>80
Input Voltage	AC : 200-240V	IP Rating	IP65
Flux	680lm	Dimension	210x80x48 mm
Beam Angle	48°	Body Color	White
Material	Aluminium	Dimmable	NO

 SKU: 7412  
 ■ 3000K

**LED Wall Light**  
**12W**


Watts 12W  
 Input Voltage AC : 200-240V  
 Flux 600lm  
 Beam Angle 160°  
 Material Aluminium

CRI Ra>80  
 IP Rating IP20  
 Dimension 315x90x30mm  
 Body Color WHITE  
 Dimmable NO



SKU: 2095  
 ■ 3000K

**LED Wall Light**  
**12W**


Watts 12W  
 Input Voltage AC : 200-240V  
 Flux 600lm  
 Beam Angle 160°  
 Material Aluminium

CRI Ra>80  
 IP Rating IP20  
 Dimension 315x90x30mm  
 Body Color BLACK  
 Dimmable NO



SKU: 2096  
 ■ 3000K

**LED Solar Wall Light**  
**1W**


Watts 1W  
 Voltage 5.5V  
 Flux 60lm  
 Beam Angle 80°  
 Battery 3.7V/18Ah

CRI Ra>80  
 IP Rating IP44  
 Dimension ø85x238mm  
 Body Color White  
 Dimmable NO



SKU: 2085    SKU: 2086  
 ■ 6000K    ■ 4500K

**LED Solar Wall Light**  
**1W**


Watts 1W  
 Voltage 5.5V  
 Flux 60lm  
 Beam Angle 80°  
 Battery 3.7V/18Ah

CRI Ra>80  
 IP Rating IP44  
 Dimension ø85x238mm  
 Body Color Black  
 Dimmable NO



SKU: 2087    SKU: 2088  
 ■ 6000K    ■ 4500K

**LED Wall Light**  
**12W**


Watts 12W  
 Input Voltage AC : 200-240V  
 Flux 1200lm  
 Beam Angle 90°  
 Material Plastic

CRI Ra>80  
 IP Rating IP65  
 Dimension ø160x60mm  
 Body Color White  
 Dimmable NO



SKU: 2089  
 ■ 3000K

**LED Wall Light**  
**12W**


Watts 12W  
 Input Voltage AC : 200-240V  
 Flux 1200lm  
 Beam Angle 90°  
 Material Plastic

CRI Ra>80  
 IP Rating IP65  
 Dimension ø160x60mm  
 Body Color BLACK  
 Dimmable NO



SKU: 2090  
 ■ 3000K

**LED Wall Light - Aluminium**  
**12W**


Watts 12W  
 Input Voltage AC : 200-240V  
 Flux 670lm  
 Beam Angle 90°  
 Material Aluminium

CRI Ra>80  
 IP Rating IP65  
 Dimension ø150x46mm  
 Body Color WHITE  
 Dimmable NO



SKU: 2091  
 ■ 3000K

**LED Wall Light - Aluminium**  
**12W**


Watts 12W  
 Input Voltage AC : 200-240V  
 Flux 670lm  
 Beam Angle 90°  
 Material Aluminium

CRI Ra>80  
 IP Rating IP65  
 Dimension ø150x46mm  
 Body Color BLACK  
 Dimmable NO



SKU: 2092  
 ■ 3000K

## LED Wall / Ceiling Light

**15W**

Watts	15W
Input Voltage	AC : 220-240V
Flux	80lm
Beam Angle	120°
Shape	Round


SKU: 7529    SKU: 7528  
 ■ 4200K    ■ 3000K

CRI	Ra>80
IP Rating	IP65
Dimension	ø169x100 mm
Body Color	BLACK
Dimmable	NO

750  
Lumens

120°


IP65



750  
Lumens

120°

IP65



## LED Wall / Ceiling Light

**15W**

Watts	15W
Input Voltage	AC : 220-240V
Flux	80lm
Beam Angle	120°
Shape	Square

SKU: 7531    SKU: 7530  
 ■ 4200K    ■ 3000K

CRI	Ra>80
IP Rating	IP65
Dimension	160x160x100 mm
Body Color	BLACK
Dimmable	NO

## LED Wall / Ceiling Light

**15W**

Watts	15W
Input Voltage	AC : 220-240V
Flux	1000lm
Beam Angle	145°
Shape	Round


SKU: 7533    SKU: 7532  
 ■ 4200K    ■ 3000K

CRI	Ra>80
IP Rating	IP65
Dimension	ø169x100 mm
Body Color	BLACK
Dimmable	NO

1000  
Lumens

145°

IP65



## LED Wall / Ceiling Light

**15W**

Watts	15W
Input Voltage	AC : 220-240V
Flux	1000lm
Beam Angle	145°
Shape	Square


SKU: 7535    SKU: 7534  
 ■ 4200K    ■ 3000K

CRI	Ra>80
IP Rating	IP65
Dimension	160x160x100 mm
Body Color	BLACK
Dimmable	NO

1000  
Lumens

145°

IP65



## LED Solar Wall Light

**16W**

Watts	16W
Input Voltage	220-240V
Flux	1120lm
Beam Angle	90°
Material	Aluminium
CRI	Ra>80
IP Rating	IP20
Dimension	800x60x100mm
Dimmable	NO

SKU: 2093    SKU: 2094  
 ■ 4200K    ■ 3000K

1120  
Lumens

90°

IP20



## LED Wall Light

**9W**

Product code	WL9-A1
Watts	12W
Input Voltage	AC : 200-240V
Flux	780lm
Beam Angle	6°
Shape	Single Head
CRI	Ra>80
IP Rating	IP54
Dimension	230x110x76
Body Color	BLACK
Dimmable	NO

SKU: 7404    SKU: 7403  
 ■ 4000K    ■ 3000K

780  
Lumens

6°

IP54



## LED BULKHEAD WALL LIGHT

**12W**

Product code	WL12-A3
Watts	12W
Input Voltage	AC : 220-240V
Flux	780lm
Beam Angle	120°
Shape	Rectangle
CRI	Ra>80
IP Rating	IP65
Dimension	230x110x76mm
Body Color	GREY
Dimmable	NO

SKU: 7527    SKU: 7526  
 ■ 4200K    ■ 3000K

780  
Lumens

120°

IP65







**LED Wall Light**  
**6W**


Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	110x54x97
Beam Angle	120°	Body Color	WHITE
Shape	Single Head	Dimmable	NO

Rotatable 355°


 SKU: 7478    SKU: 7475  
 4000K    3000K

**LED Wall Light**  
**2x6W**


Watts	12W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	1320lm	Dimension	221x54x97mm
Beam Angle	120°	Body Color	WHITE
Shape	Double Head	Dimmable	NO


Rotatable 355°


 SKU: 7484    SKU: 7481  
 4000K    3000K

**LED Wall Light**  
**6W**


Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	110x54x97
Beam Angle	120°	Body Color	BLACK
Shape	Single Head	Dimmable	NO

Rotatable 355°


 SKU: 7479    SKU: 7476  
 4000K    3000K

**LED Wall Light**  
**2x6W**


Watts	12W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	1320lm	Dimension	221x54x97mm
Beam Angle	120°	Body Color	BLACK
Shape	Double Head	Dimmable	NO

Rotatable 355°


 SKU: 7485    SKU: 7482  
 4000K    3000K

**LED Wall Light**  
**6W**


Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	110x54x97
Beam Angle	120°	Body Color	GREY
Shape	Single Head	Dimmable	NO

Rotatable 355°


 SKU: 7480    SKU: 7477  
 4000K    3000K

**LED Wall Light**  
**2x6W**


Watts	12W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	1320lm	Dimension	221x54x97mm
Beam Angle	120°	Body Color	GREY
Shape	Double Head	Dimmable	NO


Rotatable 355°


 SKU: 7486    SKU: 7483  
 4000K    3000K


**LED Wall Light**  
**6W**



Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	90x90x200mm
Beam Angle	Up 15°-Down 90°	Body Color	WHITE
Shape	Triangle	Dimmable	NO

SKU: 7472    SKU: 7469  
 4200K    3000K


**LED Wall Light**  
**6W**



Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	140x115x100mm
Beam Angle	0°- 90°	Body Color	WHITE
Shape	Round	Dimmable	NO

SKU: 7466    SKU: 7463  
 4000K    3000K


**LED Wall Light**  
**6W**



Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	90x90x200mm
Beam Angle	Up 15°-Down 90°	Body Color	BLACK
Shape	Triangle	Dimmable	NO

SKU: 7473    SKU: 7470  
 4200K    3000K


**LED Wall Light**  
**6W**



Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	140x115x100mm
Beam Angle	0°- 90°	Body Color	BLACK
Shape	Round	Dimmable	NO

SKU: 7467    SKU: 7464  
 4000K    3000K


**LED Wall Light**  
**6W**



Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	90x90x200mm
Beam Angle	Up 15°-Down 90°	Body Color	GREY
Shape	Triangle	Dimmable	NO

SKU: 7474    SKU: 7471  
 4200K    3000K


**LED Wall Light**  
**6W**



Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	140x115x100mm
Beam Angle	0°- 90°	Body Color	GREY
Shape	Round	Dimmable	NO

SKU: 7468    SKU: 7465  
 4000K    3000K





LED Wall Light  
**6W**



**WHITE**  
SKU: 7454    SKU: 7451  
4000K    3000K



**BLACK**  
SKU: 7455    SKU: 7452  
4000K    3000K

**GREY**  
SKU: 7456    SKU: 7453  
4000K    3000K

Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	100x100 mm
Beam Angle	0°-90°	Body Colors	White ; Black ; Grey
Shape	Square	Dimmable	NO



LED Wall Light  
**4W-4 Beam**



**WHITE**  
SKU: 7490    SKU: 7487  
4000K    3000K


**BLACK**  
SKU: 7491    SKU: 7488  
4000K    3000K

**GREY**  
SKU: 7492    SKU: 7489  
4000K    3000K

Watts	4W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	440lm	Dimension	ø110x93 mm
Beam Angle	90°	Body Colors	White ; Black ; Grey
Shape	Round	Dimmable	NO



LED Wall Light  
**12W**



**WHITE**  
SKU: 7460    SKU: 7457  
4000K    3000K


**BLACK**  
SKU: 7461    SKU: 7458  
4000K    3000K

**GREY**  
SKU: 7462    SKU: 7459  
4000K    3000K

Watts	12W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	1320lm	Dimension	100x100 mm
Beam Angle	0°-90°	Body Colors	White ; Black ; Grey
Shape	Square	Dimmable	NO



LED Wall Light  
**6W-2 Beam**



**WHITE**  
SKU: 7496    SKU: 7493  
4000K    3000K

**BLACK**  
SKU: 7497    SKU: 7494  
4000K    3000K

**GREY**  
SKU: 7498    SKU: 7495  
4000K    3000K


Watts	6W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP54
Flux	660lm	Dimension	ø110x93 mm
Beam Angle	90°	Body Colors	White ; Black ; Grey
Shape	Round	Dimmable	NO


**LED STEP LIGHT**  
**2W Round**

Watts 2W  
 Input Voltage AC : 220-240V  
 Flux 80lm  
 Beam Angle 55°  
 Shape Round

CRI Ra>80  
 IP Rating IP65  
 Dimension  $\phi$ 150x27 mm  
 Body Color BLACK  
 Dimmable NO


SKU: 7504    SKU: 7503  
■ 4200K    ■ 3000K


**LED STEP LIGHT**  
**2W Square**

Watts 2W  
 Input Voltage AC : 220-240V  
 Flux 80lm  
 Beam Angle 55°  
 Shape Square

CRI Ra>80  
 IP Rating IP65  
 Dimension 124x124x27mm  
 Body Color BLACK  
 Dimmable NO


SKU: 7510    SKU: 7509  
■ 4200K    ■ 3000K


**LED STEP LIGHT**  
**2W Round**

Watts 2W  
 Input Voltage AC : 220-240V  
 Flux 80lm  
 Beam Angle 55°  
 Shape Round

CRI Ra>80  
 IP Rating IP65  
 Dimension  $\phi$ 150x27 mm  
 Body Color WHITE  
 Dimmable NO


SKU: 7506    SKU: 7505  
■ 4200K    ■ 3000K


**LED STEP LIGHT**  
**2W Square**

Watts 2W  
 Input Voltage AC : 220-240V  
 Flux 80lm  
 Beam Angle 55°  
 Shape Square

CRI Ra>80  
 IP Rating IP65  
 Dimension 124x124x27mm  
 Body Color WHITE  
 Dimmable NO


SKU: 7512    SKU: 7511  
■ 4200K    ■ 3000K


**LED STEP LIGHT**  
**2W Round**

Watts 2W  
 Input Voltage AC : 220-240V  
 Flux 80lm  
 Beam Angle 55°  
 Shape Round

CRI Ra>80  
 IP Rating IP65  
 Dimension  $\phi$ 150x27 mm  
 Body Color GREY  
 Dimmable NO


SKU: 7508    SKU: 7507  
■ 4200K    ■ 3000K


**LED STEP LIGHT**  
**2W Square**

Watts 2W  
 Input Voltage AC : 220-240V  
 Flux 80lm  
 Beam Angle 55°  
 Shape Square

CRI Ra>80  
 IP Rating IP65  
 Dimension 124x124x27mm  
 Body Color GREY  
 Dimmable NO

SKU: 7514    SKU: 7513  
■ 4200K    ■ 3000K




## LED STEP LIGHT

**3W Rectangular**

Watts	3W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	100lm	Dimension	280x280x28 mm
Beam Angle	65°	Body Color	BLACK
Shape	Rectangular	Dimmable	NO

SKU: 7516    SKU: 7515  
 ■ 4200K    ■ 3000K




## LED STEP LIGHT

**3W Round**

Watts	3W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	90lm	Dimension	ø80x51 mm
Beam Angle	34°	Body Color	WHITE
Shape	Round	Dimmable	NO

SKU: 7523    SKU: 7522  
 ■ 4200K    ■ 3000K




## LED STEP LIGHT

**3W Rectangular**

Watts	3W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	100lm	Dimension	280x280x28 mm
Beam Angle	65°	Body Color	WHITE
Shape	Rectangular	Dimmable	NO

SKU: 7518    SKU: 7517  
 ■ 4200K    ■ 3000K




## LED STEP LIGHT

**3W Square**

Watts	3W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	90lm	Dimension	80x80x51 mm
Beam Angle	34°	Body Color	WHITE
Shape	Square	Dimmable	NO

SKU: 7525    SKU: 7524  
 ■ 4200K    ■ 3000K




## LED STEP LIGHT

**3W Rectangular**

Watts	3W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	100lm	Dimension	280x280x28 mm
Beam Angle	65°	Body Color	GREY
Shape	Rectangular	Dimmable	NO

SKU: 7520    SKU: 7519  
 ■ 4200K    ■ 3000K




## LED STEP LIGHT

**3W Square**

Watts	3W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP65
Flux	195lm	Dimension	84x27 mm
Beam Angle	58°	Body Color	WHITE
Shape	Square	Dimmable	NO

SKU: 7521  
 ■ 4200K




**LED CABINET LIGHT**  
**Slim Fit 1.5W**
**100**  
 Lumens
 
 IP20

Voltage	DC:5V	CRI	Ra>80
Flux	100lm	IP Rating	IP20
Beam Angle	120°	Body Color	Black
Battery	3.7V 0.9Ah	Dimension	240x40x10mm

 SKU: 240  
 3000K

Battery
 Sensor


**LED CABINET LIGHT**  
**Slim Fit 1.5W**
**100**  
 Lumens
 
 IP20

Voltage	DC:5V	CRI	Ra>80
Flux	100lm	IP Rating	IP20
Beam Angle	120°	Body Color	Silver
Battery	3.7V 0.9Ah	Dimension	240x40x10mm

 SKU: 241  
 3000K


Battery
 Sensor


**LED CABINET LIGHT**  
**Slim Fit 3.5W**
**230**  
 Lumens
 
 IP20

Voltage	DC:5V	CRI	Ra>80
Flux	100lm	IP Rating	IP20
Beam Angle	120°	Body Color	Black
Battery	3.7V 2.2Ah	Dimension	600x40x10mm

 SKU: 242  
 3000K

Battery
 Sensor


**LED CABINET LIGHT**  
**Slim Fit 3.5W**
**230**  
 Lumens
 
 IP20

Voltage	DC:5V	CRI	Ra>80
Flux	100lm	IP Rating	IP20
Beam Angle	120°	Body Color	Silver
Battery	3.7V 2.2Ah	Dimension	600x40x10mm

 SKU: 243  
 3000K

Battery
 Sensor


**LED CABINET LIGHT**  
**Slim Fit 1.5W**
**140**  
 Lumens
 
 IP20

Voltage	DC:5V	CRI	Ra>80
Flux	140lm	IP Rating	IP20
Beam Angle	120°	Body Color	Silver
Battery	3.7V 1.1Ah	Dimension	240x40x10mm

 SKU: 230  
 4500K
   
 SKU: 231  
 3000K

Battery
 Sensor


**LED CABINET LIGHT**  
**Slim Fit 2.5W**
**200**  
 Lumens
 
 IP20

Voltage	DC:5V	CRI	Ra>80
Flux	200lm	IP Rating	IP20
Beam Angle	180°	Body Color	Silver
Battery	3.7V 2Ah	Dimension	240x40x10mm

 SKU: 230  
 CCT  
 6000K 4500K 3000K

Battery
 Sensor


**LED CABINET LIGHT**  
**Magnetic Control 0.5W**
**40**  
 Lumens
 
 IP20

Voltage	DC:1.5V	CRI	Ra>80
Flux	40lm	IP Rating	IP20
Beam Angle	120°	Body Color	Silver
Battery	2*AAA	Dimension	64x43x15mm

 SKU: 233  
 4500K
   
 SKU: 234  
 3000K

2\*AAA Battery


**LED CABINET LIGHT**  
**Hanging/Stand 0.5W**
**40**  
 Lumens
 
 IP20

Voltage	DC:1.5V	CRI	Ra>80
Flux	40lm	IP Rating	IP20
Beam Angle	120°	Body Color	Silver
Battery	3*AAA	Dimension	φ80x23mm

 SKU: 235  
 4500K
   
 SKU: 236  
 3000K

3\*AAA Battery
 Sensor



Step outside with our great range of outdoor lighting solutions. Whether you're looking to light up your garden with exterior use wall lights or increase your home's safety with security lights.

**Features:**

- Up to 80% power saving
- garden or park use
- Different forms, shapes and colours
- Discrete, spot or main lighting
- With or without bulbs

**Application:**

- Wall or pylon mountable
- Lanes, alleys or pathways
- Gardens and parks



LED OUTDOOR LIGHT

LED OUTDOOR LIGHT

## LED SOLAR WALL LIGHT

**Solar Panel Power: 5.5V 1.8W**

 500  
 Lumens

IP54



Voltage	5.5V	CRI	Ra>80
Flux	500lm	IP Rating	IP54
Beam Angle	60°	Body Color	Black
Battery	3.2V 2Ah	Dimension	160x130x28mm

 SKU: 7541  
 6000K


## LED WALL LAMP 7W

**Aluminium Body**

 490  
 Lumens

IP54



Power	7W	CRI	Ra>80
Voltage	AC: 220-240V	IP Rating	IP54
Flux	490lm	Body Color	Black
Beam Angle	60°	Dimension	160x130x28mm

 SKU: 9343  
 2700K

## LED SOLAR WALL LIGHT

**Solar Panel Power: 5.5V 5W**

 1000  
 Lumens

IP54



Voltage	5.5V	CRI	Ra>80
Flux	1000lm	IP Rating	IP54
Beam Angle	60°	Body Color	Black
Battery	3.2V 4Ah	Dimension	350x140x28mm

 SKU: 7542  
 6000K


## LED SOLAR WALL LIGHT

**9W**

 400  
 Lumens

IP44



Voltage	5V	CRI	Ra>80
Flux	400lm	IP Rating	IP54
Beam Angle	110°	Body Color	Dark Grey
Battery	3.7V 2Ah	Dimension	160x130x190mm

 SKU: 9345  
 3000K


## LED SOLAR WALL LIGHT

**Solar Panel Power: 5V 12.5W**

 1200  
 Lumens

IP54



Voltage	5V	CRI	Ra>80
Flux	1200lm	IP Rating	IP54
Beam Angle	60°	Body Color	Black
Battery	3.2V 6Ah	Dimension	350x266x28mm

 SKU: 7543  
 6000K


## LED SOLAR WALL LIGHT

**9W**

 400  
 Lumens

IP54



Voltage	5V	CRI	Ra>80
Flux	400lm	IP Rating	IP44
Beam Angle	110°	Body Color	Dark Grey
Battery	3.7V 2Ah	Dimension	180x120x127mm

 SKU: 9347  
 3000K






SKU: 7422 Stainless Steel



SKU: 7423 Stainless Steel

Wall Lamp Fitting  
**E27 Holder**

Product code	WL1-A1	IP Rating	IP44
Socket	E27	Dimension	303x100x91 mm
Input Voltage	AC : 220-240V	Body Colors	Stainless Steel
Material	Aluminium	Max Power	16W



E27 Holder



IP44



LED Wall Light Fitting  
**GU10 Socket**

Product code	WL2-A3
Socket	GU10
Input Voltage	AC : 220-240V
Material	Aluminium

IP Rating	IP44
Dimension	100x66x92 mm
Body Colors	Black ; White ; Silver
Max Power	35W



GU10 Holder



IP44

SKU: 7443 Black Body

SKU: 7444 White Body

SKU: 7445 Silver Body



Wall Lamp Fitting  
**E27 Holder**

Product code	WL1-A1	IP Rating	IP44
Socket	E27	Dimension	245x180x93 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium+Glass	Max Power	60W



E27 Holder



IP44

SKU: 7401 Black Body

SKU: 7402 White Body



LED Wall Light Fitting  
**Two GU10 Sockets**

Product code	WL2-A4
Socket	2xGU10
Input Voltage	AC : 220-240V
Material	Aluminium

IP Rating	IP44
Dimension	92x68x150 mm
Body Colors	Black ; White ; Silver
Max Power	2x35W



GU10 Holder



IP44

SKU: 7446 Black Body

SKU: 7447 White Body

SKU: 7448 Silver Body


**LED Wall Light Fitting**  
**GU10 Socket**


Product code	WL2-A1	IP Rating	IP54
Socket	GU10	Dimension	92x68x80 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White ; Silver ; Polished
Material	Aluminium	Max Power	35W

SKU: 7431	Black Body
SKU: 7432	White Body
SKU: 7433	Silver Body
SKU: 7449	Polished


**LED Wall Light Fitting**  
**GU10 Socket**


Product code	WL2-A1	IP Rating	IP54
Socket	GU10	Dimension	100x66x92 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White ; Grey
Material	Aluminium	Max Power	35W

SKU: 7434	Black Body
SKU: 7435	White Body
SKU: 7436	Grey Body


**LED Wall Light Fitting**  
**Two GU10 Sockets**


Product code	WL2-A2	IP Rating	IP54
Socket	2xGU10	Dimension	92x68x150 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White ; Silver ; Polished
Material	Aluminium	Max Power	2x35W

SKU: 7437	Black Body
SKU: 7438	White Body
SKU: 7439	Silver Body
SKU: 7450	Polished


**LED Wall Light Fitting**  
**Two GU10 Sockets**


Product code	WL2-A2	IP Rating	IP54
Socket	2xGU10	Dimension	92x68x150 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White ; Grey
Material	Aluminium	Max Power	2x35W

SKU: 7440	Black Body
SKU: 7441	White Body
SKU: 7442	Grey Body



**LED SOLAR POWER GARDEN LIGHT**



LED SOLAR GARDEN LIGHT  
**Solar Panel Power: 5.5V 0.6W**



Voltage	5.5V	CRI	Ra>80
Flux	8lm	IP Rating	IP65
Beam Angle	120°	Body Color	Black
Battery	3.7V 2Ah	Dimension	165x165x31.5mm

Wall Mounted or Pin Mounted



LED SOLAR GARDEN LIGHT  
**Solar Panel Power: 5.5V 0.6W**



Voltage	5.5V	CRI	Ra>80
Flux	8lm	IP Rating	IP65
Beam Angle	120°	Body Color	Black
Battery	3.7V 2Ah	Dimension	165x165x31.5mm

Wall Mounted or Pin Mounted



LED Light Fixture  
**GU10 Socket**



Product code	WL2-A2	IP Rating	IP65
Socket	1xGU10	Dimension	92x68x150 mm
Input Voltage	AC : 220-240V	Body Colors	Black
Material	PC	Max Power	35W

SKU: 2084 GU10-Black



LED SOLAR LAMP  
**1.5W Lawn Light**



Watts	1.5W	CRI	Ra>80
Voltage	6V	IP Rating	IP65
Flux	60lm	Material	Aluminium
Beam Angle	110°	Body Color	Black
Battery	1.2V/1500mAh	Dimension	168x75.5x340 mm

- SKU: 9321 6000K
- SKU: 9322 3000K
- SKU: 9323 Blue Light
- SKU: 9324 Green Light

CHARGING TIME~(7-8) Hours  
DETECTION RANGE~8±2m



LED SOLAR LAMP  
**0.75W Wall Light**



Product code	WL2-A6	CRI	Ra>80
Watts	0.75W	IP Rating	IP54
Voltage	5.5V	Material	ABS+PC
Flux	110lm	Body Color	Black
Beam Angle	110°	Dimension	124x95x48mm
Battery	1200mAh		

SKU: 7405 White Light 6000K

CHARGING TIME~(7-8) Hours  
DETECTION RANGE~8±2m



LED SOLAR LAMP  
**1.5W Wall Light**



Product code	WL5-A6	CRI	Ra>80
Watts	1.5W	IP Rating	IP54
Voltage	7.4V	Material	ABS+PC
Flux	150lm	Body Color	Black
Beam Angle	110°	Dimension	196x115x45mm
Battery	1200mAh		

SKU: 7406 6000K

CHARGING TIME~(7-8) Hours  
DETECTION RANGE~8±2m



LED SOLAR GARDEN LIGHT  
**Solar Panel Power: 5.5V 1W**

60 Lumens IP54

Voltage	5.5V	CRI	Ra>80
Flux	60lm	IP Rating	IP54
Beam Angle	270°	Body Color	Black
Battery	3.7V 1.2Ah	Dimension	180x116x740mm

Table Way or Pin Mounted

SKU: 9349  
CCT  
6000K 4000K 3000K

Battery Solar Power



LED SOLAR WALL LIGHT  
**0.5W**

40 Lumens IP44

Voltage	3.7V	CRI	Ra>80
Flux	40lm	IP Rating	IP44
Beam Angle	120°	Body Color	Black
Battery	3.7V 1.2Ah	Dimension	105x70x40mm

SKU: 9352  
3000K

Battery Solar Power



LED SOLAR GARDEN LIGHT  
**Solar Panel Power: 5.5V 1W**

60 Lumens IP54

Voltage	5.5V	CRI	Ra>80
Flux	60lm	IP Rating	IP54
Beam Angle	270°	Body Color	Black
Battery	3.7V 1.2Ah	Dimension	230x116x150mm

Table Way or Wall Mounted

SKU: 9350  
CCT  
6000K 4000K 3000K

Battery Solar Power



LED SOLAR LIGHT SPIKE  
**2W**

160 Lumens IP65

Voltage	3.7V	CRI	Ra>80
Flux	160lm	IP Rating	IP65
Beam Angle	120°	Body Color	Black
Battery	3.7V 1.8Ah	Dimension	102x169x313mm

Light Brigness Control

SKU: 9353  
3000K

Battery Solar Power



LED SOLAR GARDEN LIGHT  
**Solar Panel Power: 5V 1.8W**

70 Lumens IP54

Voltage	5.5V	CRI	Ra>80
Flux	70lm	IP Rating	IP54
Beam Angle	270°	Body Color	Black
Battery	3.7V 1.2Ah	Dimension	160x160x213mm

Remote Control

SKU: 9351  
CCT  
6000K 4000K 3000K

Battery Solar Power



LED SOLAR LIGHT SPIKE  
**1W**

80 Lumens IP65

Voltage	3.7V	CRI	Ra>80
Flux	80lm	IP Rating	IP65
Beam Angle	120°	Body Color	Black
Battery	3.7V 1.2Ah	Dimension	φ130x395mm

Light Brigness Control

SKU: 9354  
3000K

Battery Solar Power



2 PCS  
Box

LED SOLAR LIGHT SPIKE  
**Solar Panel Power: 5V 1W**



Voltage	3.2V	CRI	Ra>80
Flux	90lm	IP Rating	IP65
Beam Angle	60°	Body Color	Black
Battery	3.2V 1.2Ah	Dimension	φ126x51.8mm

SKU: 9357  
6000K



2 PCS  
Box

LED SOLAR LIGHT SPIKE  
**Solar Panel Power: 5V 1W**



Voltage	3.2V	CRI	Ra>80
Flux	90lm	IP Rating	IP65
Beam Angle	60°	Body Color	Black
Battery	3.2V 1.2Ah	Dimension	φ126x51.8mm

SKU: 9358  
4000K



2 PCS  
Box

LED SOLAR LIGHT SPIKE  
**Solar Panel Power: 5V 1W**



Voltage	3.2V	CRI	Ra>80
Flux	90lm	IP Rating	IP65
Beam Angle	60°	Body Color	Black
Battery	3.2V 1.2Ah	Dimension	φ126x51.8mm

SKU: 9359  
RGB



LED LAWN LIGHT 7W  
**Aluminium Body**



Power	7W	CRI	Ra>80
Voltage	AC: 220-240V	IP Rating	IP54
Flux	490lm	Body Color	Dark Grey
Beam Angle	150°	Dimension	φ123x800mm

SKU: 9344  
3000K



LED SOLAR LAMP  
**9W**



Voltage	3.7V	CRI	Ra>80
Flux	400lm	IP Rating	IP44
Beam Angle	110°	Body Color	Dark Grey
Battery	3.7V 2Ah	Dimension	150x195x762mm

SKU: 9346  
3000K



LED SOLAR LAMP  
**9W**



Voltage	3.7V	CRI	Ra>80
Flux	400lm	IP Rating	IP44
Beam Angle	110°	Body Color	Dark Grey
Battery	3.7V 2Ah	Dimension	150x195x762mm

SKU: 9346  
3000K




**LED SOLAR LAMP**  
**2W Wall Light**


Watts	2W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	200lm	Material	Aluminium
Beam Angle	110°	Body Color	SS Brushed
Battery	3.7V/1200mAh	Dimension	142x125x188mm

 SKU: 9331  
 3000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**4.4W Wall Light**


Watts	4.4W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	600lm	Material	Aluminium
Beam Angle	110°	Body Color	SS Brushed
Battery	3.7V/2600mAh	Dimension	173x160x155mm

 SKU: 9334  
 3000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**2W Lawn Spike**


Watts	2W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	200lm	Material	Aluminium
Beam Angle	110°	Body Color	SS Brushed
Battery	3.7V/1200mAh	Dimension	125x125x500mm

 SKU: 9332  
 3000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**4.4W Lawn Spike**


Watts	4.4W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	600lm	Material	Aluminium
Beam Angle	110°	Body Color	SS Brushed
Battery	3.7V/2600mAh	Dimension	160x160x500mm


 SKU: 9335  
 3000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**2W Lawn Light**


Watts	2W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	200lm	Material	Aluminium
Beam Angle	110°	Body Color	SS Brushed
Battery	3.7V/1200mAh	Dimension	125x125x800mm

 SKU: 9333  
 3000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**4.4W Lawn Light**


Watts	4.4W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	600lm	Material	Aluminium
Beam Angle	110°	Body Color	SS Brushed
Battery	3.7V/2600mAh	Dimension	142x125x188mm

 SKU: 9336  
 3000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m


**LED SOLAR LAMP**  
**4.4W Wall Light**


Watts	4.4W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	600lm	Material	Aluminium
Beam Angle	110°	Body Color	SS Brushed
Battery	3.7V/2600mAh	Dimension	162x150x155mm

 SKU: 9337  
 3000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**6W Wall Light**


Watts	6W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	600lm	Material	Aluminium
Beam Angle	110°	Body Color	Black
Battery	3.7V/2200mAh	Dimension	173x160x155mm

 SKU: 9340  
 6000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**4.4W Lawn Spike**


Watts	4.4W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	600lm	Material	Aluminium
Beam Angle	110°	Body Color	SS Brushed
Battery	3.7V/2600mAh	Dimension	150x150x500mm

 SKU: 9338  
 3000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**6W Lawn Light 50cm**


Watts	6W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	600lm	Material	Aluminium
Beam Angle	110°	Body Color	Black
Battery	3.7V/2200mAh	Dimension	150x150x500mm

 SKU: 9341  
 6000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**4.4W Lawn Light**


Watts	4.4W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	600lm	Material	Aluminium
Beam Angle	110°	Body Color	SS Brushed
Battery	3.7V/2600mAh	Dimension	150x150x800mm

 SKU: 9339  
 3000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m

**LED SOLAR LAMP**  
**6W Lawn Light 90cm**


Watts	6W	CRI	Ra>80
Voltage	3.7V	IP Rating	IP44
Flux	600lm	Material	Aluminium
Beam Angle	110°	Body Color	Black
Battery	3.7V/2200mAh	Dimension	150x150x900mm


 SKU: 9341  
 6000K

 CHARGING TIME~(7-8) Hours  
 DETECTION RANGE~8±2m


**Wall Lamp Up**  
**E27 Holder**


Product code	GD1-A1	IP Rating	IP44
Socket	E27	Dimension	215x170x220 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium+PC	Max Power	60W

SKU: 9301 Black Body  
 SKU: 9302 White Body


**Stand Lamp**  
**E27 Holder**


Product code	GD1-A2	IP Rating	IP44
Socket	E27	Dimension	170x170x290 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium+PC	Max Power	60W

SKU: 9305 Black Body  
 SKU: 9306 White Body


**Wall Lamp Down**  
**E27 Holder**


Product code	GD1-A1	IP Rating	IP44
Socket	E27	Dimension	215x170x220 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium+PC	Max Power	60W

SKU: 9303 Black Body  
 SKU: 9304 White Body


**Ceiling Lamp**  
**E27 Holder**


Product code	GD1-A3	IP Rating	IP44
Socket	E27	Dimension	170x170x740 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium+PC	Max Power	60W

SKU: 9307 Black Body  
 SKU: 9308 White Body





Lawn Lamp 60cm  
**E27 Holder**

Product code	GD1-A1	IP Rating	IP44
Socket	E27	Dimension	170x170x600 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium+PC	Max Power	60W



E27 Holder



IP44

SKU: 9309 Black Body

SKU: 9310 White Body



Lawn Lamp 90cm  
**E27 Holder**

Product code	GD1-A1	IP Rating	IP44
Socket	E27	Dimension	170x170x900 mm
Input Voltage	AC : 220-240V	Body Colors	Black ; White
Material	Aluminium+PC	Max Power	60W



E27 Holder



IP44

SKU: 9311 Black Body

SKU: 9312 White Body



Lawn Lamp  
**E27 Holder**

Product code	GD1-A7	IP Rating	IP54
Socket	E27	Dimension	76x76x800/1000 mm
Input Voltage	AC : 220-240V	Body Colors	Grey
Material	Aluminium+PC	Max Power	16W



E27 Holder



IP54

SKU: 9315 Grey Body 80cm

SKU: 9316 Grey Body 100cm



1W



7W



1W



1.3W

Powerful LED Pond Wall Lights

**LED Light 1.3W ; 7W**

Product code	UN1-A5	IP Rating	IP68
Power	1.3W ; 7W	Dimension	60 x 60 x 78 mm
Voltage	DC:24V		



- SKU: 590 1W ■ 3000K
- SKU: 856 7W ■ 4200K

Decorative Mini LED Pond Wall Lights

**LED Light 1-1.3W**

Product code	UN1-A6	IP Rating	IP68
Power	1W -1.3W	Dimension	35 x 28 mm
Voltage	DC:24V		



- SKU: 591 ■ RGB
- SKU: 594 ■ 6000K
- SKU: 595 ■ 3000K



1W



1.3W

Mini Wall & Floor Lights

**LED Light 1.2W**

Product code	UN1-A5	IP Rating	IP68
Power	1.2W	Dimension	38 x 30 mm
Voltage	DC:24V		



- SKU: 586 ■ 6000K
- SKU: 587 ■ 3000K
- SKU: 588 ■ Blue
- SKU: 589 ■ RGB

Powerful LED Pond Wall Light

**LED Light 1W-1.3W**

Product code	UN1-A9	IP Rating	IP68
Power	1W-1.3W	Dimension	32 x 44 mm
Voltage	DC:24V		



- SKU: 565 ■ RGB
- SKU: 566 ■ Blue
- SKU: 567 ■ Green
- SKU: 568 ■ Amber



1 Side Beam



2 Side Beam

Mini Directional Ground Lights

**LED Light 1.3W**

Product code	UN1-A8	IP Rating	IP68
Power	1.3W	Dimension	44 x 43 mm
Voltage	DC:24V		



- SKU: 596 6000K 1 Side Beam
- SKU: 597 3000K 1 Side Beam
- SKU: 598 6000K 2 Side Beam
- SKU: 599 3000K 2 Side Beam



1W



1.3W

LED Mini Floor Lights  
**LED Light 1-1.3W**

Product code	UN1-A3	IP Rating	IP68
Power	1W -1.3W	Dimension	23 x 40 mm
Voltage	DC:24V		



- SKU: 580 1W 6000K
- SKU: 581 1W 3000K
- SKU: 582 1W Blue
- SKU: 583 1.3W 6000K
- SKU: 584 1.3W 3000K
- SKU: 585 1.3W Blue



LED Spike Lights  
**LED Light 1.3W**

Product code	UN1-A5	IP Rating	IP68
Power	1.3W	Dimension	38 x 30 mm
Voltage	DC:24V		



- SKU: 866 6000K
- SKU: 867 4000K
- SKU: 868 3000K



**Sleeve for LED Underground Lights**

- SKU: 873 Size - 22\*55MM
- SKU: 872 Size - 55\*150MM
- SKU: 874 Size - 35\*150MM



Mini Ground Lights  
**HALF-SHADING 1.3W**

Product code	UN1-A6	IP Rating	IP68
Power	1.3W	Dimension	60 x 45 mm
Voltage	DC:24V		

- SKU: 592 6000K
- SKU: 593 3000K



Mini Recessed Wall Lights  
**LED Light 1W**

Product code	UN1-A6	IP Rating	IP44
Power	1W	Dimension	64 x 43 mm
Voltage	DC:24V		

- SKU: 863 6000K
- SKU: 864 4000K
- SKU: 865 3000K
- SKU: 879 Blue



**LED Pool Light**  
**12W PAR56**

 1200 Lumens  
 90°  
 IP68

Product code	PL12-A1	CRI	Ra>80
Watts	12W	IP Rating	IP68
Input Voltage	AC/DC :12V	Dimension	ø178x114 mm
Flux	1200lm	Body	Glass
Beam Angle	90°	Dimmable	NO
Socket	PAR56		

SKU: 571 6000K

SKU: 572 2700K

  
Chips

**LED Pool Light**  
**12W PAR56**

 RGB  
 1200 Lumens  
 90°  
 IP68

Product code	PL12-A1	CRI	Ra>80
Watts	12W	IP Rating	IP68
Input Voltage	AC/DC :12V	Dimension	ø178x114 mm
Flux	1200lm	Body	Glass
Beam Angle	90°	Dimmable	NO
Socket	PAR56		

SKU: 573

  
Chips


With Remote



**LED Outdoor Light**  
**1W Spotlight**

 80 Lumens  
 ø58mm  
 18°  
 IP65

Watts	1W	CRI	Ra>80
Input Voltage	AC : 220-245V	IP Rating	IP65
Flux	80lm	Dimension	ø65x78mm
Beam Angle	18°	Body Color	Stainless steel

SKU: 507 6000K

SKU: 517 2800K



**LED Outdoor Light**  
**3W Spotlight**

 240 Lumens  
 ø90mm  
 18°  
 IP65

Watts	3W	CRI	Ra>80
Input Voltage	AC : 220-245V	IP Rating	IP65
Flux	240lm	Dimension	ø100x82mm
Beam Angle	18°	Body Color	Stainless steel

SKU: 501 6000K

SKU: 502 2800K



**LED Outdoor Light**  
**5W Spotlight**

 400 Lumens  
 ø132mm  
 18°  
 IP65

Watts	5W	CRI	Ra>80
Input Voltage	AC : 220-245V	IP Rating	IP65
Flux	400lm	Dimension	ø140x93 mm
Beam Angle	18°	Body Color	Stainless steel

SKU: 515 6000K

SKU: 516 2800K



**LED Outdoor Light**  
**7W Spotlight**

 560 Lumens  
 ø132mm  
 18°  
 IP65

Watts	7W	CRI	Ra>80
Input Voltage	AC : 220-245V	IP Rating	IP65
Flux	560lm	Dimension	ø150x93 mm
Beam Angle	18°	Body Color	Stainless steel

SKU: 550 6000K

SKU: 551 2800K





Outdoor Solar String Lights- Milky  
**G50 Bulbs 20 pcs -10 Meters**

SKU: 9092  
2700K

128  
Lumens

Solar Power

IP65



Battery

**3.7V 0.5Ah**



Outdoor Solar String Lights- Clear  
**G50 Bulbs 20 pcs -10 Meters**

SKU: 9093  
2700K

128  
Lumens

Solar Power

IP65



Battery

**3.7V 0.5Ah**



Outdoor Solar String Lights- Milky  
**G50 Bulbs 20 pcs - 7 Meters**  
**- 8 Modes**

SKU: 9094  
2700K

200  
Lumens

Solar Power

IP65



Battery

**3.7V 0.5Ah**



Outdoor Solar String Lights- Clear  
**G50 Bulbs 20 pcs - 7 Meters**  
**- 8 Modes**

SKU: 9095  
2700K

200  
Lumens

Solar Power

IP65



Battery

**3.7V 0.5Ah**


**Outdoor String Lights  
E27 Holders**

- \* 6 or 14.4 Meters Long String
- \* 10 or 15 Pcs E27 Sockets
- \* Up to 5A
- \* Suspended Sockets
- \* IP65
- \* Black Color

SKU: 5054 10pcs E27 - 6m  
 SKU: 5051 15pcs E27 - 14.4m



E27 Holder



IP65


**Outdoor String Lights  
E27 Holders**

- \* 6 or 14.4 Meters Long String
- \* 10 or 15 Pcs E27 Sockets
- \* Up to 5A
- \* Fixed Sockets
- \* IP65
- \* White Color

SKU: 5055 10pcs E27 - 6m  
 SKU: 5053 15pcs E27 - 14.4m



E27 Holder



IP65


**Outdoor String Lights  
E27 Holders**

- \* 14.4 Meters Long String
- \* 15 Pcs E27 Sockets
- \* Up to 5A
- \* Fixed Sockets
- \* IP65
- \* Black Color

SKU: 5052 15pcs E27 - 14.4m



E27 Holder



IP65


**Outdoor String Lights  
10m - 1.5m Power cable**  
 Include Adapter: DC24V

Watts	1.4W	CRI	Ra>80
Input Voltage	AC : 220-245V	IP Rating	IP44
Flux	50lm	Dimension	10m
Beam Angle	270°	Body Color	Transparent

SKU: 9091 ■ 2700K



IP44


**Outdoor String Lights  
Colourful Bulbs**

- \* 8 or 13 Meters Long String
- \* 10 or 20 Bulbs included
- \* 0.5 Watts Per Bulb
- \* IP65
- \* Black Color

SKU: 5056 10pcs Bulbs - 8m - 3W ■ Colourful Bulbs  
 SKU: 5092 20pcs Bulbs - 13m - 6W ■ Colourful Bulbs



IP65



Linkable up to 2 Strings


**Outdoor String Lights  
Colourful Bulbs**

- \* 8 or 13 Meters Long String
- \* 10 or 20 Bulbs included
- \* 0.5 Watts Per Bulb
- \* IP65
- \* White Color

SKU: 5090 10pcs Bulbs - 8m - 3W ■ Colourful Bulbs  
 SKU: 5095 20pcs Bulbs - 13m - 6W ■ Colourful Bulbs



IP65



Linkable up to 2 Strings


**Outdoor String Lights  
With Bulbs**

- \* 8 or 13 Meters Long String
- \* 10 or 20 Bulbs included
- \* 0.5 Watts Per Bulb
- \* IP65
- \* Black Color

SKU: 5057 10pcs Bulbs - 8m - 3W ■ 6000K  
 SKU: 5058 10pcs Bulbs - 8m - 3W ■ 2700K  
 SKU: 5093 20pcs Bulbs - 13m - 6W ■ 6000K  
 SKU: 5094 20pcs Bulbs - 13m - 6W ■ 2700K



IP65



Linkable up to 2 Strings


**Outdoor String Lights  
With Bulbs**

- \* 8 or 13 Meters Long String
- \* 10 or 20 Bulbs included
- \* 0.5 Watts Per Bulb
- \* IP65
- \* White Color

SKU: 5091 10pcs Bulbs - 8m - 3W ■ 2700K  
 SKU: 5096 20pcs Bulbs - 13m - 6W ■ 2700K



IP65



Linkable up to 2 Strings



A universe of possibilities when combining the existing lighting solutions with various detecting devices to further enable energy saving and efficiency.

Features:

- Up to 80% power saving
- Home, office, garden or park use
- Different forms, shapes and colours
- Easy installation and long lifecycle

Application:

- Wall or pylon mountable

LED MOTION SENSORS



**Microwave Sensor  
Remote Control**

Input Voltage	AC:120-277V	Body Color	White
Detection	360°	Class	II
Range	4-15m Max	Max Power	1000W LED
Frequency	50-60 Hz	LUX	<5 Lux-200 Lux
Working Temp.	-20°C/+40°C	Material	Plastic+ALU
IP Rating	IP65	Dimension	66x81mm




SKU: 7324    White Body



**PIR Motion Sensor**

Product code	SE1-A1	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	180°	Time	10sec-7min
Range	12m Max	Max Power	300W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP44	Dimension	∅65x86.5mm

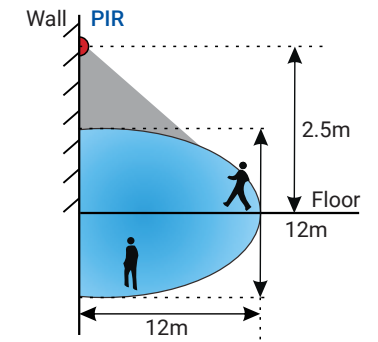

SKU: 7301    White Body  
SKU: 7302    Black Body



**Smoke Alarm  
85dB (3m)**

Low Battery Alert: 7-15Days

Input Voltage	DC: 9V	Body Color	White
Alarm Sound	85dB (3m)	Class	II
Working Temp.	-20°C/+40°C	Material	Plastic+ALU
IP Rating	IP20	Dimension	66x81mm




**\*Battery not included**

SKU: 7325    White Body





**PIR Motion Sensor**

Product code	SE1-A3	Body Color	Black
Input Voltage	AC:110-240V	Class	II
Beam Angle	180°	Time	10sec-7min
Range	12m Max	Max Power	200W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP54	Dimension	∅77x70mm

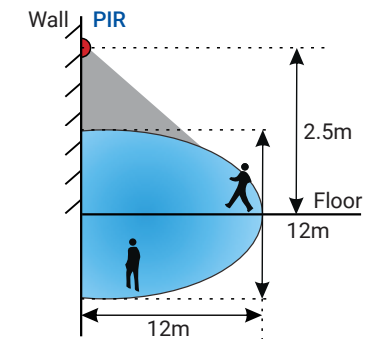

SKU: 7306    White Body  
SKU: 7307    Black Body





**PIR Motion Sensor**

Product code	SE1-A2	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	360°	Time	10sec-7min
Range	16m Max	Max Power	300W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP20	Dimension	∅88x55.5mm





SKU: 7305 White Body

**PIR Motion Sensor**

Product code	SE1-A2	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	360°	Time	10sec-7min
Range	8m Max	Max Power	1000W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP20	Dimension	∅108x25mm



SKU: 7310 White Body



**PIR Motion Sensor**

Product code	SE1-A2	Body Color	White
Input Voltage	AC:220-240V	Class	II
Beam Angle	360°	Time	10sec-7min
Range	6m Max	Max Power	300W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP20	Dimension	∅76x58mm





SKU: 7317 White Body   
SKU: 7320 Black Body   
SKU: 7321 Gray Body

**PIR Motion Sensor**

Product code	SE1-A2	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	360°	Time	10sec-7min
Range	6m Max	Max Power	1000W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP20	Dimension	∅65x86.5mm



SKU: 7311 White Body

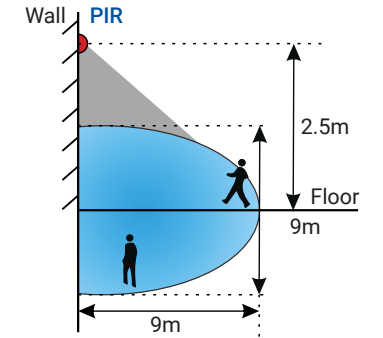

**PIR Motion Sensor**

Functions: D2D: DUSK TO DAWN

Product code	SE1-A2	Body Color	Black
Input Voltage	AC:220-240V	Class	II
Beam Angle	180°	Time	10sec-10min
Range	16m Max	Max Power	400W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP54		





SKU: 7318    Black Body

**PIR Motion Sensor**

Product code	SE1-A2	Body Color	White
Input Voltage	AC:220-240V	Class	II
Beam Angle	160°	Time	10sec-7min
Range	9m Max	Max Power	400W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP20		



SKU: 7322    White Body

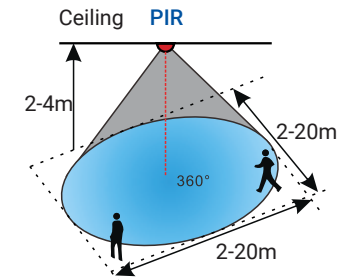

**PIR Motion Sensor**

Product code	SE1-A2	Body Color	White
Input Voltage	AC:220-240V	Class	II
Beam Angle	120°	Time	10sec-7min
Range	10m Max	Max Power	300W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP44		



SKU: 7319    White Body

**PIR Motion Sensor**

Product code	SE1-A2	Body Color	White
Input Voltage	AC:220-240V	Class	II
Beam Angle	360°	Time	5sec-10min
Range	20m Max	Max Power	1000W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP20	Dimension	ø65x86.5mm



SKU: 7323    White Body



ON/OFF via moving hand



Dimming + Driver  
**5.8 Ghz**

**Short Distance IR**

Product code	SE1-A2	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	180°	Time	10sec-7min
Range	5cm Max	Max Power	200W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic
IP Rating	IP20	Dimension	75x18mm




SKU: 7304    White Body

**Microwave Sensor**

Product code	SE1-A5	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	180°/ 300°	Time	10sec-30min
Range	25-100%	Max Power	300W LED
Frequency	50-60 Hz	Ambient Light	5,10,20,30,50,100,200lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP20	Dimension	75x47mm



SKU: 7315    White Body



Dimming + Driver  
**5.8 Ghz**

**PIR Motion Sensor**

Product code	SE1-A4	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	120°	Time	10sec-7min
Range	2-10m Max	Max Power	100W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP65	Dimension	57x35mm




SKU: 7309    White Body

**Microwave Sensor**

Product code	SE1-A5	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	180°	Time	10sec-7min
Range	3-10m Max	Max Power	300W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP20	Dimension	56x42mm



SKU: 7316    White Body




**PIR Motion Sensor**

Product code	SE1-A2	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	360°	Time	10sec-7min
Range	8m Max	Max Power	300W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP20	Dimension	∅80x62mm



SKU: 7312 White Body



**PIR Motion Sensor**

Product code	SE1-A1	Body Color	White
Input Voltage	AC:110-240V	Class	II
Beam Angle	300°	Time	10sec-7min
Range	16m Max	Max Power	300W LED
Frequency	50-60 Hz	Ambient Light	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP Rating	IP44	Dimension	165x117mm



SKU: 7313 White Body



**Light Control Sensor**

Product code	SE1-A1	Body Color	White+Blue
Input Voltage	AC:110-240V	Class	II
Power	6A Max	Ambient Light	<10Lux ON; >40Lux OFF
Frequency	50-60 Hz	Material	Plastic+ALU
Working Temp.	-30°C/+50°C	Dimension	46x44x35mm
IP Rating	IP44		



SKU: 7314 White Body



## LED DISPLAYS AND STAGE EFFECTS



LED Displays have large variety of applications – for commercial use, information boards and other decorative purposes, with wide customization options.

### Features:

- High power and flexible applications
- For commercial and public use
- Different options for resolutions
- Indoor and outdoor use
- Easy to install and maintain
- Low energy consumption

### Application:

- Stadiums and concerts
- Indoor music halls
- Commercial outdoor use





## LED Displays

## Module Indoor

SKU: 608 P2Size  
 SKU: 66364 P2.604Size  
 SKU: 631 P3 Size  
 SKU: 601 P4 Size  
 SKU: 629 P4 Size  
 SKU: 602 P5 Size



DC 5V

150°

IP20

	P2	<b>NEW</b> P2.604	P3	P4	P4	P5
Pixel pitch	2 mm	2.604 mm	3 mm	4 mm	4 mm	5 mm
Module size	256x128 mm	250x250 mm	192x192 mm	256x128 mm	256x256 mm	320x160 mm
Module pixels	128x64 pixel	96x96 pixel	64x64 pixel	64x32 pixel	64x64 pixel	64x32 pixel
Brightness	2000cd/m <sup>2</sup>	1100cd/m <sup>2</sup>	1100cd/m <sup>2</sup>	1100cd/m <sup>2</sup>	2000cd/m <sup>2</sup>	2000cd/m <sup>2</sup>
Refresh rate	1920 Hz	3840 Hz	1920 Hz	1920 Hz	3840 Hz	1920 Hz
Drive mode	1/32 Scan	1/32 Scan	1/32 Scan	1/16 Scan	1/16 Scan	1/16 Scan
Module Power	16.5W	16.5W	16.5W	16.5W	33W	17W
Working Temp.	-20°C/+50°C	-20°C/+65°C	-20°C/+50°C	-20°C/+50°C	-20°C/+65°C	-20°C/+50°C
Pixel Composition	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB
Life Span	50 000 h	100 000 h	50 000 h	50 000 h	50 000 h	50 000 h

LED Display Cabinet  
Fix INDOOR Ver 2.0

SKU: 610 P3 Size  
 SKU: 611 P4 Size  
 SKU: 612 P5 Size




DC 5V

150°

IP20

	P3	P4	P5
Pixel pitch	3 mm	4 mm	5 mm
Display size	960x960mm	768x768mm	960x960mm
Module size	192x192mm	256x128mm	320x192mm
Brightness	2000cd/m <sup>2</sup>	2000cd/m <sup>2</sup>	2000cd/m <sup>2</sup>
Pixel Density	111 111dots/ m <sup>2</sup>	62 500dots/ m <sup>2</sup>	40 000dots/ m <sup>2</sup>
Drive mode	1/32 Scan	1/16 Scan	1/16 Scan
Refresh rate	1920 Hz	1920 Hz	1920 Hz
Working Temp.	-20°C/+50°C	-20°C/+50°C	-20°C/+50°C
MAX Power	750W	750W	750W
Life Span	50 000 h	50 000 h	50 000 h

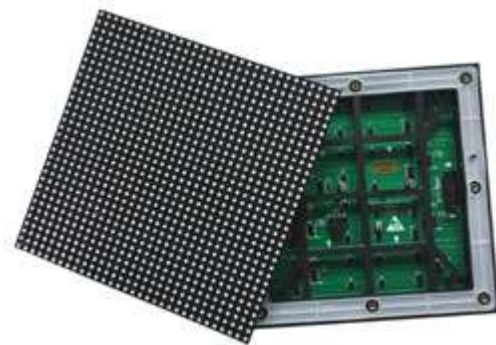

## LED Displays

## Module Outdoor

SKU: 609 P3 Size  
 SKU: 66022 P3 Size  
 SKU: 603 P4 Size  
 SKU: 604 P5 Size  
 SKU: 606 P6 Size  
 SKU: 605 P8 Size



DC 5V

150°

IP65

	P3	<b>NEW</b> P3	P4	P5	P6	P8
Pixel pitch	3 mm	3 mm	4 mm	5 mm	6 mm	8 mm
Module size	192x192 mm	192x192 mm	256x128 mm	320x160 mm	196x196 mm	256x128 mm
Module pixels	64x64pixel	64x64pixel	64x32pixel	64x32 pixel	32x32 pixel	32x16 pixel
Brightness	6500cd/m <sup>2</sup>	6500cd/m <sup>2</sup>	5500cd/m <sup>2</sup>	5500cd/m <sup>2</sup>	5500cd/m <sup>2</sup>	5500cd/m <sup>2</sup>
Refresh rate	1920 Hz	1920 Hz	1920 Hz	1920 Hz	1920 Hz	1920 Hz
Drive mode	1/16 Scan	1/16 Scan	1/16 Scan	1/16 Scan	1/16 Scan	1/4 Scan
Module Power	35W	35W	35W	39W	26W	27W
Working Temp.	-20°C/+50°C	-20°C/+50°C	-20°C/+50°C	-20°C/+50°C	-20°C/+50°C	-20°C/+50°C
Pixel Composition	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB
Life Span	50 000 h	50 000 h	50 000 h	50 000 h	50 000 h	50 000 h

LED Display Cabinet  
Fix INDOOR Ver 2.0

SKU: 638 P3 Size  
 SKU: 639 P4 Size  
 SKU: 640 P5 Size



DC 5V

150°

IP20

	P3	P4	P5
Pixel pitch	3 mm	4 mm	5 mm
Display size	960x960mm	768x768mm	960x960mm
Module size	192x192mm	256x128mm	320x192mm
Brightness	2000cd/m <sup>2</sup>	2000cd/m <sup>2</sup>	2000cd/m <sup>2</sup>
Pixel Density	111 111dots/ m <sup>2</sup>	62 500dots/ m <sup>2</sup>	40 000dots/ m <sup>2</sup>
Drive mode	1/32 Scan	1/16 Scan	1/16 Scan
Refresh rate	1920 Hz	1920 Hz	1920 Hz
Working Temp.	-20°C/+50°C	-20°C/+50°C	-20°C/+50°C
MAX Power	750W	750W	750W
Life Span	50 000 h	50 000 h	50 000 h


**LED Displays**  
**Module Indoor**

SKU: 635 P2.5 Size  
 SKU: 636 P3.07 Size



	P2.5	P3.07
Pixel pitch	2.5 mm	3.07 mm
Module size	320x160 mm	320x160 mm
Module pixels	192x192 pixel	192x192 pixel
Brightness	650cd/m <sup>2</sup>	600cd/m <sup>2</sup>
Refresh rate	3840 Hz	3840 Hz
Drive mode	1/32 Scan	1/32 Scan
Module Power	140W	127W
Working Temp.	-20°C/+50°C	-20°C/+50°C
Pixel Composition	SMD 3in1 RGB	SMD 3in1 RGB
Life Span	100 000 h	100 000 h


**LED Transparent Displays**  
**Module Indoor**

SKU: 66020 P3.91 Size



	P3.91
Pixel pitch	Horizontal 3.91mm Vertical 7.82mm
Module size	1000x1000 mm
Drive mode	1/16 Scan
Brightness	2500cd/m <sup>2</sup>
Refresh rate	960 Hz
Pixel Density	32768 dot/m <sup>2</sup>
Module Power	400W/m <sup>2</sup>
Working Temp.	-20°C/+50°C
Pixel Composition	SMD 3in1 RGB
Life Span	50 000 h


**LED Display Front Service**  
**Module Indoor**

SKU: 66019 P1.875 Size  
 SKU: 66018 P2.5 Size



	P1.875	P2.5
Pixel pitch	1.875 mm	2.5 mm
Module size	480x480 mm	480x480 mm
Module pixels	240x240 pixel	240x240 pixel
Brightness	500-800cd/m <sup>2</sup>	500-800cd/m <sup>2</sup>
Refresh rate	3840 Hz	3840 Hz
Pixel Density	284 444dots/m <sup>2</sup>	160 000dots/m <sup>2</sup>
Module Power	500W/m <sup>2</sup>	20W
Working Temp.	-20°C/+50°C	-20°C/+50°C
Pixel Composition	SMD 3in1 RGB	SMD 3in1 RGB
Life Span	50 000 h	50 000 h


**LED Displays Rental**  
**Module Indoor**

SKU: 101 P2.6 Size



	P2.6
Pixel pitch	2.6 mm
Module size	500x500 mm
Module pixels	192x192 pixel
Brightness	2000cd/m <sup>2</sup>
Refresh rate	3840 Hz
Drive mode	1/32 Scan
Module Power	650W Max
Working Temp.	-20°C/+50°C
Pixel Composition	SMD 3in1 RGB
Life Span	100 000 h


**LED Display Cabinet**  
**Fix OUTDOOR**

SKU: 617 P4 Size  
 SKU: 618 P5 Size  
 SKU: 619 P8 Size  
 SKU: 607 P10 Size




	P4	P5	P8	P10
Pixel pitch	5 mm	5 mm	8 mm	10 mm
Display size	768x768mm	960x960mm	768x768mm	960x960mm
Module size	256x128mm	160x160mm	256x128mm	160x160mm
Brightness	5500cd/m <sup>2</sup>	5500cd/m <sup>2</sup>	5500cd/m <sup>2</sup>	7500cd/m <sup>2</sup>
Pixel Density	62 500dots/ m <sup>2</sup>	40 000dots/ m <sup>2</sup>	15 625dots/ m <sup>2</sup>	40 000dots/ m <sup>2</sup>
Drive mode	1/8 Scan	1/8 Scan	1/8 Scan	1/8 Scan
Refresh rate	1920 Hz	1920 Hz	1920 Hz	1920 Hz
Working Temp.	-20°C/+50°C	-20°C/+50°C	-20°C/+50°C	-20°C/+50°C
MAX Power	800W	800W	800W	800W
Life Span	50 000 h	50 000 h	50 000 h	50 000 h


**LED Displays**  
**Rental INDOOR**

SKU: 620 P2.5 Size  
 SKU: 614 P5 Size



	P2.5	P5
Pixel pitch	2.5 mm	5 mm
Display size	640x640mm	960x960mm
Module size	160x160mm	320x160mm
Brightness	2000cd/m <sup>2</sup>	2000cd/m <sup>2</sup>
Pixel Density	160 000dots/ m <sup>2</sup>	40 000dots/ m <sup>2</sup>
Drive mode	1/16 Scan	1/16 Scan
Port Type	HUB75	HUB75
Working Temp.	-20°C/+50°C	-20°C/+50°C
MAX Power	600W	750W
Life Span	50 000 h	50 000 h

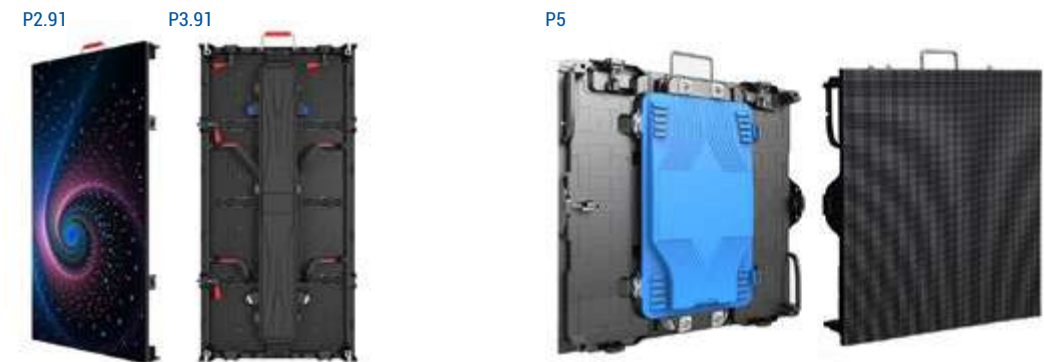

	P2.91	P3.91	P5
Pixel pitch	2.91 mm	3.91 mm	5 mm
Display size	500x1000mm	500x1000mm	960x960mm
Module size	250x250mm	250x250mm	320x160mm
Brightness	5000cd/m <sup>2</sup>	65000cd/m <sup>2</sup>	7500cd/m <sup>2</sup>
Pixel Density	32 768dots/ m <sup>2</sup>	65 532dots/ m <sup>2</sup>	40 000dots/ m <sup>2</sup>
Drive mode	1/21 Scan	1/16 Scan	1/8 Scan
Port Type	HUB75	HUB75	HUB75
Working Temp.	-20°C/+65°C	-20°C/+50°C	-20°C/+50°C
MAX Power	800W	800W	750W
Life Span	100 000 h	50 000 h	50 000 h

**LED Displays**  
**Rental OUTDOOR**

 SKU: 66209 P2.91 Size  
 SKU: 615 P3.91 Size  
 SKU: 616 P5 Size







### LED Display Poster

#### Outdoor

SKU: 66027 P3 Size  
 SKU: 66025 P3.84 Size



	P3	P3.84
Pixel pitch	3 mm	3.84 mm
Display size	600x1200mm	600x1200mm
Module size	200x200mm	200x200mm
Brightness	>6000cd/m <sup>2</sup>	>6000cd/m <sup>2</sup>
Pixel Density	102400dots/ m <sup>2</sup>	67600dots/ m <sup>2</sup>
Drive mode	1/16S	1/13S
Refresh rate	4000 Hz	4000 Hz
Working Temp.	-20°C/+70°C	-20°C/+70°C
MAX Power	950W /m <sup>2</sup>	820W /m <sup>2</sup>
Life Span	100 000 h	50 000 h



### LED Displays Rental INDOOR

SKU: 102 P2.9 Size  
 SKU: 628 P3.91 Size



	P2.9	P3.91
Pixel pitch	2.9 mm	3.91 mm
Display size	500x500mm	500x500mm
Module size	168x168mm	128x128mm
Brightness	5000cd/m <sup>2</sup>	5000cd/m <sup>2</sup>
Pixel Density	28224dots/ m <sup>2</sup>	62 500dots/ m <sup>2</sup>
Drive mode	1/21 Scan	1/21 Scan
Refresh rate	3840 Hz	3840 Hz
Working Temp.	-20°C/+50°C	-20°C/+50°C
MAX Power	650W	650W
Life Span	100 000 h	100 000 h



### LED Display Poster Outdoor Double-sided

SKU: 66028 P3 Size  
 SKU: 66026 P3.84 Size



	P3	P3.84
Pixel pitch	3 mm	3.84 mm
Display size	600x1200mm	600x1200mm
Module size	200x200mm	200x200mm
Brightness	>6000cd/m <sup>2</sup>	>6000cd/m <sup>2</sup>
Pixel Density	102400dots/ m <sup>2</sup>	67600dots/ m <sup>2</sup>
Drive mode	1/16S	1/13S
Refresh rate	4000 Hz	4000 Hz
Working Temp.	-20°C/+70°C	-20°C/+70°C
MAX Power	950W /m <sup>2</sup>	820W /m <sup>2</sup>
Life Span	100 000 h	50 000 h



### LED Displays FIX OUTDOOR V2

SKU: 624 P4 Size  
 SKU: 623 P8 Size



	P4	P8
Pixel pitch	2.9 mm	3.91 mm
Display size	960x960mm	960x960mm
Module size	321x160mm	320x1620mm
Brightness	6500cd/m <sup>2</sup>	6500cd/m <sup>2</sup>
Pixel Density	62 500dots/ m <sup>2</sup>	62 500dots/ m <sup>2</sup>
Drive mode	1/16 Scan	1/16 Scan
Refresh rate	3840 Hz	1920 Hz
Working Temp.	-20°C/+50°C	-30°C/+65°C
MAX Power	600W	600W
Life Span	100 000 h	100 000 h



**LED Display Cabinet**  
**Fix OUTDOOR**

SKU: 148 P3.91 Size  
SKU: 634 P5 Size  
SKU: 626 P6.67 Size



IP65



**LED Displays**  
**INDOOR Poster Display**

SKU: 621 P3 Size



DC 5V



150°



IP20

	P3.91	P5	P6.67
Pixel pitch	3.91 mm	5 mm	6.67 mm
Display size	1000x1000mm	960x960mm	960x960mm
Module size	256x256pixels	320x320pixels	144x144pixels
Brightness	6500cd/m <sup>2</sup>	6500cd/m <sup>2</sup>	6500cd/m <sup>2</sup>
Pixel Density	65 536dots/ m <sup>2</sup>	36 864dots/ m <sup>2</sup>	20 736dots/ m <sup>2</sup>
Drive mode	1/8 Scan	1/8 Scan	1/8 Scan
Refresh rate	3840 Hz	3840 Hz	1920 Hz
Working Temp.	-30°C/+80°C	-30°C/+65°C	-30°C/+65°C
MAX Power	600W	600W	600W
Life Span	100 000 h	100 000 h	100 000 h

	P3
Pixel pitch	3 mm
Module size	192x192 mm
Module pixels	64x64 pixel
Brightness	2000cd/m <sup>2</sup>
Pixel Density	111 111dots/ m <sup>2</sup>
Drive mode	1/32 Scan
Port Type	HUB75
Working Temp.	-20°C/+50°C
Pixel Composition	SMD 3in1 RGB
Life Span	100 000 h



**LED Display Cabinet P3.91**  
**Fix OUTDOOR**

SKU: 66173 P3.91 Size



IP65



Pixel pitch	3.91 mm
Display size	1000x500mm
Module size	256x128pixels
Brightness	6500cd/m <sup>2</sup>
Drive mode	1/8 Scan
Refresh rate	1920 Hz
Working Temp.	-30°C/+80°C
MAX Power	600W
Life Span	100 000 h



**LED DISPLAYS**  
**43 inch IR touch**

CPU: Bay Trail-D Celeron Quad-core J1900 2.0GHZ  
Chipset: Intel Bay trail SOC  
GPU Integrate: Intel HD Graphics  
Display output : VGA, built-in VGA pin, HDMI, HDMI pin, LVDS  
Memory: DDR3 2GB  
Hard drive: 32G Hard drive

SKU: 671 43inch



IP20



### LED Displays Flexible

#### Module Indoor

SKU: 66367 P1.86 Size

SKU: 66368 P2 Size

SKU: 66206 P2.5Size

SKU: 66207 P3 Size



IP20

	P1.86	P2	P2.5	P3
Pixel pitch	1.86 mm	2 mm	2.5 mm	3 mm
Module size	320x160 mm	320x160 mm	320x160 mm	320x160 mm
Module pixels	172x86 pixel	160x80 pixel	128x64 pixel	128x64 pixel
Brightness	600cd/m <sup>2</sup>	600cd/m <sup>2</sup>	700-750cd/m <sup>2</sup>	700-750cd/m <sup>2</sup>
Refresh rate	3840 Hz	3840 Hz	1920-3840 Hz	1920-3840 Hz
Drive mode	1/43 Scan	1/40 Scan	1/32 Scan	1/32 Scan
Module Power	21W	21W	20W	21W
Working Temp.	-20°C/+65°C	-20°C/+65°C	-20°C/+65°C	-20°C/+65°C
Pixel Composition	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB
Life Span	100 000 h	100 000 h	100 000 h	100 000 h



### LED Display Banner P3.91

#### Fix OUTDOOR

SKU: 66420



IP65

Pixel pitch	3.91 mm
Display size	500x1500mm
Transparency	53%
Brightness	4500cd/m <sup>2</sup>
Pixel Density	98 304dots/ m <sup>2</sup>
Refresh rate	3840-5120 Hz



### LED Display Cabinet

#### Fix INDOOR

SKU: 66208



IP20

Pixel pitch	1.86 mm
Display size	640x480mm
Module size	320x160pixels
Brightness	500-800cd/m <sup>2</sup>
Drive mode	1/64 Scan
Refresh rate	3840 Hz
Working Temp.	-20°C/+50°C
Life Span	100 000 h



### LED Display Transparent P2.6

#### Fix OUTDOOR

SKU: 66421



IP65

Pixel pitch	2.6 mm
Display size	1000x1500mm
Transparency	65%
Brightness	1200nits
Resolution	256x192
Refresh rate	5120 Hz


**LED Displays  
Module Indoor**

SKU: 66366 P1.86 Size  
 SKU: 66302 P2 Size  
 SKU: 66021 P2.5 Size



IP20

	P1.86	P2	P2.5
Pixel pitch	1.86 mm	2 mm	2.5 mm
Module size	320x160 mm	320x160 mm	320x160 mm
Module pixels	172x86 pixel	160x80 pixel	128x64 pixel
Brightness	600cd/m <sup>2</sup>	600cd/m <sup>2</sup>	1200cd/m <sup>2</sup>
Refresh rate	3840 Hz	3840 Hz	3840 Hz
Drive mode	1/43 Scan	1/40 Scan	1/32 Scan
Module Power	24W	24W	20W
Working Temp.	-20°C/+65°C	-20°C/+65°C	-20°C/+50°C
Pixel Composition	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB
Life Span	100 000 h	100 000 h	100 000 h


**LED Displays 45°  
Module Indoor**

SKU: 66202 P2 Size  
 SKU: 66201 P2.5 Size  
 SKU: 66203 P4 Size



IP20

	P2	P2.5	P4
Pixel pitch	2 mm	2.5 mm	4 mm
Module size	320x160 mm	320x160 mm	256x256 mm
Module pixels	160x80 pixels	128x64 pixels	64x64 pixels
Brightness	800cd/m <sup>2</sup>	1000cd/m <sup>2</sup>	1000cd/m <sup>2</sup>
Refresh rate	3840 Hz	3840 Hz	3840 Hz
Drive mode	1/32 Scan	1/32 Scan	1/32 Scan
Module Power	20W	20W	20W
Working Temp.	-20°C/+65°C	-20°C/+65°C	-20°C/+65°C
Pixel Composition	SMD 3in1 RGB	SMD 3in1 RGB	SMD 3in1 RGB
Life Span	100 000 h	100 000 h	100 000 h

**LED Display Accessories**
**Splitter**


DIS-300 is specialized for multi-screens and super large led screens. The card possesses two input ports and eight output ports, enabling that one split to eight and two split to four. Functions change automatically. Each RJ45 port can be independently adjusted, and support read back parameters from scan board.

**Description:**

- 1 in 8 out or 2 in 4 out, automatic switching.
- Each RJ45 port can be independently adjusted.
- No need to install the drivers



SKU: 952




IP20


**LED Displays  
Module Outdoor**

SKU: 66023 P2.5 Size  
 SKU: 66496 P8 Size



IP65

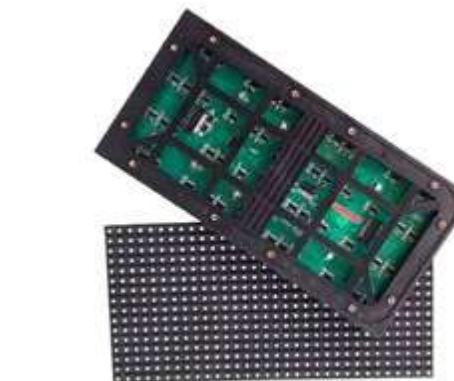

	P2.5	P8
Pixel pitch	2.5 mm	8 mm
Module size	320x160 mm	320x160 mm
Module pixels	128x64 pixel	40x20 pixel
Brightness	6500cd/m <sup>2</sup>	4500cd/m <sup>2</sup>
Refresh rate	1920 Hz	3840 Hz
Drive mode	1/16 Scan	1/5 Scan
Module Power	35W	27W
Working Temp.	-30°C/+65°C	-30°C/+65°C
Pixel Composition	SMD 3in1 RGB	SMD 3in1 RGB
Life Span	100 000 h	100 000 h


**RECEIVING CARDS  
FOR LED DISPLAYS**


DC 5V



IP20

SKU No.	950	654	655	113
Resolution	256 x 226	256 x 226	512x256	512 x 384
RGB Data Output	16 Groups	24 Groups	32 Groups	24 Groups
Interface	8 x HUB75	12 x HUB75	16 x HUB75	32 x HUB75


**MX40 PRO LED Screen Controller**

SKU: 66488

Inputs: 3x HDMI 2.0, 1x DP 1.2, 1x 12G-SDI  
 Outputs: 20x LED-Out (RJ45), 3x HDMI 2.0  
 Loop, 1x 12G-SDI Loop, 4x OPT-Out (10G)  
 Voltage: AC 100-240V, 50/60HZ  
 Consumption: 70 watts  
 Dimensions: 482.6 x 467.0. x 94.2mm  
 (WxDxH)  
 Weight: 7.5kg


**SENDING CARD  
FOR LED DISPLAYS**


DC 5V



IP20

SKU No.	650	651
Input Resolutin	1280x1024,1024x1200,1600x848	1920x1200,2048x1152,2560x96
Capacity	1.3 million pixels	2.3 million pixels
Supply Voltage	5V	5V
Control Method	USB Interface	USB Interface
Video Interface	DVI	HDMI/DVI
Audio Interface	3.5mm	HDMI/3.5mm
Video Format	RGB	RGB ,YCrCb4:2:2,YCrCb4:4:4
Output Interface	2 Ethernet ports	4 Ethernet ports
Bit Depth	8bit	8/10/12bit

**Multifunctional CARD  
FOR LED DISPLAYS**

SKU: 972



DC 5V



IP20

MFN300  
 Ethernet connection: 2x Gigabit Ethernet  
 connection  
 RS232: Sub-D 9-pin connector  
 Audio: 3.5mm  
 Supply voltage: DC 5V  
 Operating temperature: -20 ~ 75°C  
 Dimensions: 144 x 92 x 20mm  
 Weight: 0.165 kg

NEW  
 PRODUCT

**Processor for LED screens P20**

SKU: 66502

Voltage: 100-240V~, 3.0-1.5A, 50/60Hz  
 Dimensions: 482.6 × 501 × 139 mm (L × W × H)  
 Inputs: 8x DP 1.2 / HDMI 2.0 4x 12G-SDI  
 Outputs: 8x HDMI 2.0  
 Layers: 3x 4K@60Hz & 4x 2K@60Hz or 4x 4K@60Hz  
 Controlling: Event controller U5 / U5 Pro PixelFlow  
 Software Stream Deck support  
 1x HDMI 1.3 Multiviewer  
 8x OPT Out  
 4x HDMI 1.3  
 Downstream Keying: Luma Key & Chroma Key  
 5" LCD display  
 2x Gigabit Ethernet ports  
 2x Line-In & 2x Line-Out (3.5mm)

 NEW  
 PRODUCT

**Multimedia player for LED screens TCC70G**

SKU: 66218

Maximum supported resolution: 512×384 pixels  
 Power supply: DC 4.5 V~5.5 V  
 Consumption: 10 W  
 Memory: 8 GB (4 GB available)  
 Operating temperature: -20°C to +60°C  
 Humidity: 0% RH to 80% RH, non-condensing  
 Dimensions: 150.0 mm × 99.9 mm × 18.0 mm  
 Weight: 121.3 g

 NEW  
 PRODUCT

**Receiver card for LED screens MRV208-1**

SKU: 66211

Resolution: 256x256  
 Output RGB data: 16 Groups  
 Interface: 8 x HUB75E  
 Port Type: HUB75E  
 Temperature: -20°C / +50°C

 NEW  
 PRODUCT

**Wi-Fi media player for LED screens TB1**

SKU: 66215

**Hardware:**  
 - 4 core 1.5 GHz processor  
 - 1 GB of RAM  
 - 8 GB of internal storage (4 GB available)

 NEW  
 PRODUCT

**Receiver card for LED screens MRV412**

SKU: 66212

Resolution: 512x512  
 Output RGB data: 24 Groups  
 Interface: 24 x HUB75  
 Port Type: HUB75  
 Temperature: -20°C / +50°C

 NEW  
 PRODUCT

**Wi-Fi media player for LED screens TB2**

SKU: 66216

**Hardware:**  
 - 4 core 1.5 GHz processor  
 - 1 GB of RAM  
 - 8 GB of internal storage (4 GB available)



### TB40 CONTROLLER

#### Multimedia Players

Wi-Fi media player used in the construction of LED screens with 2 Ethernet ports with a capacity of up to 1,300,000 pixels each with a maximum width of 4096 pixels and a maximum height of 4096 pixels.

TB40 enables intelligent control of the LED screen with an application for tablets and smartphones.

- 4 core 1.8 GHz processor
- 1 GB of RAM
- 16 GB of internal storage (4 GB available)
- Dual Wi-Fi modes

SKU: 152



IP20



### TB6 CONTROLLER

#### Multimedia Players

- Loading capacity up to 1,300,000 pixels, with the maximum width of 4096 pixels and maximum height of 1920 pixels
- Wired Gigabit Ethernet
- Stereo audio output
- HDMI Loop
- HDMI input and auto full-screen display
- 2 USB ports allowing for USB playback
- Onboard light sensor connector allowing for automatic and scheduled brightness adjustment
- Synchronization mechanism for multi-screen playing
- Powerful processing capability
- Comprehensive control plans
- Synchronous and asynchronous dual-mode
- Dual-Wi-Fi mode
- Redundant backup

SKU: 661



IP20

### TB40 CONTROLLER

#### Multimedia Players

Wi-Fi media player used in the construction of LED screens with 2 Ethernet ports with a capacity of up to 1,300,000 pixels each with a maximum width of 4096 pixels and a maximum height of 4096 pixels.

TB40 enables intelligent control of the LED screen with an application for tablets and smartphones.

- 4 core 1.8 GHz processor
- 1 GB of RAM
- 16 GB of internal storage (4 GB available)
- Dual Wi-Fi modes

SKU: 153



IP20



### TB8 CONTROLLER

#### Multimedia Player

- 4 Ethernet ports, loading capacity of each port up to 2,300,000 pixels, with the maximum width of 4096 pixels and maximum height of 1920 pixels
- Wired Gigabit Ethernet
- Stereo audio output
- HDMI Loop
- HDMI input and auto full-screen display
- 2 USB ports allowing for USB playback
- Onboard light sensor connector allowing for automatic and scheduled brightness adjustment synchronization mechanism for multi-screen playing
- Powerful processing capability
- Comprehensive control plans
- Synchronous and asynchronous dual-mode
- Dual-Wi-Fi mode

SKU: 946



IP20



## Sending Box

### LED Display Controller

The Optonica Sender card control box is a sending card inside of an enclosure with a built in power supply. You can order the stand alone card if you do not need the enclosure.

Product Type:	Controller
Capacity:	1.3 million pixels
Supply Voltage:	AC-100-240V-50/60HZ
Control Method:	USB Interface
Video Interface:	DVI
Audio Interface:	3.5mm
Viedo Format:	RGB
Output Interface :	2 Ethernet ports
Bit Depth Of Video Resource:	8bit
Light Sensor Interface:	1
USB Cable:	1.5M



SKU: 948



IP20



## Sending Box Synchronous LED Display Controller MCTRL700

The MCTRL700 is a video controller for LED screens developed by NovaStar. It supports 1x DVI input, 1x HDMI input, 1x audio input and 6 Ethernet outputs, with a loading capacity of 1920x1200@60Hz. The MCTRL700 is suitable for rental and fixed installations, such as concerts, live shows, monitoring centers, events, sports halls, etc.

Product specification: Product Type Controller  
 Inputs: 1xSL-DVI (IN-OUT) 1xHDMI 1.3 (IN-OUT) 1xAUDIO  
 Outputs: 6x RJ45, 1x HDMI 1.3, 1x SL-DVI  
 Capacity: 650,000 pixels  
 Dimensions (w/h/d): 482.6 x 44.4 x 268.50mm  
 Weight: 2.6 kg

SKU: 114



IP20

## Video Processor for LED screens

### LED Display Controller

VX600



High-quality and precise video processor used in LED screen installations

Тип: Video Controller

SKU: 150 VX600

Inputs: 2x HDMI 1.3, 1x DVI, 1x 3G-SDI (max. 1920x1080@60Hz)  
 Outputs: 6x LED-Out (RJ45) 1x HDMI 1.3 Out, 2x OPT-Out (10G)  
 Capacity: 3.9 million pixels

VX1000



SKU: 151 VX1000

Inputs: 2x HDMI 1.4, 1x DVI, 1x 3G-SDI Max. width: 4092 pixels (4092x1136@60Hz)  
 Outputs: 10x LED-Out (RJ45) 1x HDMI 1.3 Out, 2x OPT-Out (10G)  
 Capacity: 6.5 million pixels with a maximum width of 10,240 pixels and a maximum height of 8192 pixels



Dimensions (w/h/d): 483.6 x 351.2 x 50.1mm  
 Weight: 4 kg



IP20



## Sending Box Synchronous LED Display Controller

supports extra-large resolution. With HDMI/DVI video input and four Ethernet port outputs, a single unit is able to load 2560x960. Multiple units can be cascaded for uniform control.

Product specification: Product Type Controller  
 Input Resolution: 1920x1200,2048x1152,2560x960  
 Capacity: 2.3 million pixels  
 Supply Voltage: AC-100-240V-50/60HZ  
 Control Method: USB Interface  
 Video Interface: HDMI / DVI  
 Audio Interface: HDMI/3.5mm  
 Viedo Format: RGB,YCrCb4:2:2,YCrCb4:4:4  
 Output Interface: 4 Ethernet ports  
 Bit Depth Of Video Resource: 8/10/12bit  
 Light Sensor Interface: 1



SKU: 947



IP20





### MCTRL660 PRO LED Screen Controller

SKU: 66491

Inputs: 1x 3G-SDI 1x HDMI 1.4a 1x SL-DVI  
 Outputs: 6x LED-Out (RJ45) 2x 10G (OOPT Out (OPT Out 1 for Ethernet Ports 1-8; OPT Out 2 Backup)  
 Voltage: AC 100-240V, 50/60HZ  
 Consumption: 20 watts  
 Dimensions: 482.6 x 356. x 50.1 mm (WxDxH)  
 Weight: 4.6 kg



### MCTRL R5 LED Screen Controller

SKU: 66401

Inputs: 1x 6G-SDI 1x HDMI 1.4 1x Dual-Link DVI  
 Outputs: 8x LED-Out (RJ45) 2x 10G (OOPT Out (OPT Out 1 for Ethernet Ports 1-8; OPT Out 2 Backup)  
 Voltage: AC 100-240V, 50/60HZ  
 Consumption: 25 watts  
 Dimensions: 482.6 x 334.6 x 52mm (WxDxH)  
 Weight: 4.3kg



### Processor for LED screens TU15 Pro

SKU: 66404

Inputs: 2x HDMI 1.3 3x USB 2.0 for multimedia playback  
 Outputs: 4x LED-Out (RJ45) 2x audio output (1x SPDIF, 1x 3.5mm)  
 Operating system: Android 11  
 Bluetooth: 5.1  
 Memory: 4GB RAM 32GB internal memory  
 Voltage: DC 12V 3A  
 Consumption: 21W  
 Dimensions: 211.7 x 185.0 x 50.6mm  
 Weight: 1.12kg



### TB30 Wi-Fi media player for LED screens

SKU: 66402

2 Gigabit Ethernet ports capacity of up to 650,000 pixels (1x Main, 1xBackup) (Maximum width/height: 4096 pixels)  
 WLAN (stand-alone or as an access point)  
 Stereo audio output  
 Процессор: Quad-Core ARM A55 1.8Ghz  
 1GB memory  
 16GB internal memory  
 2 connections for sensors (e.g. NovaStar NS060 light sensor) configurable via LAN/WLAN with ViPlex Express & NovaLCT  
 Synchronised playback between multiple devices possible (synchronisation via NTP or GPS(4G module required))  
 Supports the NovaStar 4G module (not included)  
 Voltage: AC-100-240V, 50/60HZ  
 Dimensions: 274.3mmx139.0mmx40.0mm (WxDxH)



### Processor for LED screens TU20 Pro

SKU: 66405

Inputs: 2x HDMI 1.3 3x USB 2.0 for multimedia playback  
 Outputs: 6x LED-Out (RJ45) 2x audio output (1x SPDIF, 1x 3.5mm) 1x HDMI (1080p)  
 Operating system: Android 11  
 Bluetooth: 5.1  
 Memory: 4GB RAM 32GB internal memory  
 Voltage: DC 12V 3A  
 Consumption: 21W  
 Dimensions: 211.7 x 185.0 x 50.6mm  
 Weight: 1.12kg



### TB50 Wi-Fi media player for LED screens

SKU: 66403

2 Gigabit Ethernet ports capacity of up to 650,000 pixels  
 WLAN (stand-alone or as an access point)  
 1x HDMI 1.4 output (Max.: 1080p@60Hz, can be used as loop-out)  
 1x HDMI 1.4 input  
 Stereo audio output  
 Processor: Quad-Core ARM A55 1.8Ghz  
 1GB memory  
 16GB internal memory  
 2 connections for sensors (eg NovaStar NS060 light sensor) configurable via LAN/WLAN with ViPlex Express & NovaLCT  
 Synchronised playback between multiple devices possible  
 Voltage: AC-100-240V, 50/60HZ  
 Dimensions: 274.3mmx139.0mmx40.0mm (WxDxH)



### Video processor for LED screens VX400

SKU: 66214

Type: Video Controller  
 Inputs: 1x HDMI 1.3 (IN & LOOP), 1x HDMI 1.3, 1x DVI (IN & LOOP), 1x 3G-SDI (IN & LOOP), 1x optical fiber port (OPT1)  
 Outputs: 4x Gigabit Ethernet ports, 2x Fiber outputs, 1x HDMI 1.3  
 Capacity: 2.6 million pixels  
 Dimensions (w/h/d): 482.6 x 43.6 x 301.2mm  
 Weight: 4 kg



IP20



### DMX384 Moving Light Control

SKU: 696

DMX384 moving light control DMX512 controller for controlling spectacular stage lighting.

Channels: 384  
 DMX input/output: 3 pin male/female XLR  
 Power supply: DC 9V 1000mA  
 Dimensions: 520mm×183mm×73mm  
 Weight: 2.6 kg



IP20



### Video processor for LED screens J6

SKU: 66217

1x DP 1.1 (3840×2160@30Hz) or HDMI 1.4 (3840×2160@30Hz)  
 2x 3G-SDI (1920×1080@60Hz) and Loop  
 1x HDMI 1.3 (1920×1080@60Hz)  
 4x DVI (1920×1080@60Hz) or HDMI 1.3 (1920×1080@60Hz)  
 Outputs:  
 8x DVI (4 groups with 2 outputs per group)  
 2x Dual-Link DVI (1x Main and 1x Backup each)  
 1x HDMI for preview monitor  
 Further Features , Genlock Input&Loop  
 Control via USB or Ethernet  
 Supply voltage: AC-100-240V-50/60HZ  
 Consumption: 50W  
 Dimensions: 482.6 x 373.5 x 96mm (with rackmount)



IP20



### Wireless DMX512 Controller

SKU: 662

Input voltage: 9-12V DC 300mA min  
 Communication distance: 700m (visible distance)  
 Operating frequency: 2.4G ISM, 126 frequency band  
 Maximum transmission power: 20dBm  
 Receive sensitivity: -94dBm  
 DMX signal output: 3/5 pin XLR  
 Dimensions: 75 x 147 x 43mm  
 Weight: 360g



IP20



### Video processor for LED screens H5

SKU: 66494

Max. Number of input cards: 10  
 Max. Number of input channels: 40  
 Max. Number of output cards: 3  
 Max. Loading Capacity: 39,000,000 Pixels  
 Max. Number of layers: 48  
 Supply voltage: AC 100 - 240V, 50/60 Hz  
 Consumption: 400Watt  
 Dimensions: 482.6 × 532.8 × 228.2mm (W×D×H)  
 Weight: 25 kg



IP20



### DMX Power Splitter

3 pin XLR IN/OUT  
 Power: 15W  
 Output: 4 or 8 DMX  
 Size: 430x50x180mm  
 Net weight: 2.35kg



SKU: 694 Output: 4 DMX

SKU: 695 Output: 8 DMX



IP20



### H\_1X HDMI 2.0+1X DP 1.2 INPUT CARD screens TCC70G

SKU: 66489

1x HDMI 2.0: -Backwards compatible with HDMI 1.4 & HDMI 1.3  
 Max. Resolution: 4096×2160@60Hz or 8192×1080@60Hz HDCP 2.2 compatible  
 Custom EDID's: Max. Width: 4092 pixels (4092×2261@60Hz), Max. Height: 4095 Pixel (2188×4095@60Hz)  
 1x DP 1.2: Backwards compatible with DP 1.1  
 Max. Resolution: 4096×2160@60Hz or 8192×1080@60Hz  
 HDCP 2.2 compatible  
 Custom EDID's: Max width: 8192 pixels (8192×1146@60Hz), Max. Height: 4095 Pixel (2188×4095@60Hz)



### Wi-Fi media player for LED screens LCB4K

SKU: 66492

**Hardware**  
 -Processor: Quad-core ARM A55 @ 1.8 GHz.  
 -Video Decoding: H.264/H.265 4K@60Hz.  
 -Memory: 2 GB RAM.  
 -Storage: 32 GB internal storage.  
 Dimensions (W/H/D): 274.3 mm × 139.0 mm × 40.0 mm  
 Weight: 1.1 kg



### H\_20x RJ45 sending card

SKU: 66490

20x RJ45 Gigabit Ethernet outputs:  
 At 8Bit color depth:  
 650,000 pixels per port  
 At 10-bit color depth:  
 320,000 pixels per port  
 Hot backup capable



### Controller for LED screens U5TB30

SKU: 66503

Voltage: 100-240V~, 3.0-1.5A, 50/60Hz  
 Consumption: 240 W  
 Dimensions: 740 × 651.4 × 431.6 mm (L × W × H)  
 Weight: 24kg  
 87 programmable LCD buttons  
 4 encoders  
 8 Fader  
 T-Bar  
 PixelFlow software integrated  
 Timecode capable (LTC input & output)  
 KVM function  
 Simultaneous control of multiple switchers and media servers  
 PTZ Control  
 Folding screen  
 21.5" Main touchscreen, 8" Smart touchscreen



### Wireless DMX controller CARD screens TCC70G

SKU: 66447



### MCTRL4K LED Screen Controller

SKU: 66213

Type: Video Controller  
 Inputs: 1x DP 1.2, 1x HDMI 2.0, 2x Dual-Link DV  
 Outputs: 16x LED output (RJ45),  
 4x OPT Out (2x Main, 2x Backup)  
 Capacity: 8.8 million pixels  
 Dimensions (w/h/d): 482.6 x 372 x 89mm  
 Weight: 4.6 kg



### 18\*10W Flat aluminium RGBW LED PAR Light

Voltage: AC90-260V 50/60Hz  
 Power: 180W  
 Light source: 18\*10W RGBW led par light  
 LED life: 50,000 hours.  
 Lens degree: 15° 25°, 45° (optional)  
 DMX channel: 4/8CH  
 Control Mode: Auto, Sound, DMX512, Master-slave  
 Strobe: 0 ~ 20 times / sec.

SKU: 683



RGB+W



IP20



### 7\*10w Mini RGBW LED PAR Light

Voltage: AC100~240V 50~60Hz  
 Power consumption: 70W  
 Light source: 7\*10W RGBW 4in1 LED  
 Beam angle: 15° 25° 40° optional  
 DMX channels: 7 CHS  
 Function: DMX AutoSound Master-slave, strobe, dimmer  
 Housing Material: plastic  
 Working Environment: -20~40  
 Packing size: 22.5\*10\*22.5Cm (1pc/CTN)

SKU: 691



RGB+W



IP20



### 18\*10W Flat aluminium RGB LED PAR Light

Voltage: AC90-260V 50/60Hz  
 Power: 180W  
 Light source: 18x 10W 4 in 1 LED  
 LED life: 50,000 hours.  
 Lens degree: 15° 25°, 45° (optional)  
 DMX channel: 4/8CH  
 Control Mode: Auto, Sound, DMX512, Master-slave  
 Strobe: 0 ~ 20 times / sec.

SKU: 943



RGB



IP20



### 7\*10w Remote Mini RGB+WW LED PAR Light

Voltage: AC100~240V 50~60Hz  
 Power consumption 70W  
 Light source: 7\*10W RGB+WW 4in1 LED  
 Beam angle: 25° optional  
 DMX channels: 4/6CH  
 Function: DMX, Remote, Auto, Sound, Master-slave, Strobe, Dimmer  
 Housing Material: Plastic  
 Protection power: IEC power in and out Working Environment: -20~40  
 Packing size: 22.5\*10\*22.5Cm (1pc/CTN)

SKU: 692



RGB+WW



IP20



### LED Slim Flat PAR Can 18x18W RGBWA+UV 6 in 1

Voltage: AC90-245V, 50-60HZ  
 Power: 180W  
 Light source: 18x 18W RGBWA+UV 6 in 1 LED  
 LED life: 50,000 hours.  
 Lens degree: 15° 25°, 45° (optional)  
 DMX channel: 10/6CH  
 Control Mode: Auto, Sound, DMX512, Master-slave Function  
 effect: dimmer /Strobe /Eotic /Gradual change  
 Strobe: 0 ~ 20 times / sec.

Size: 265x80x280 mm  
 Net weight 3kg

SKU: 177



RGBWA+UV



IP20



### 36\*3W LED PAR Light

Voltage: AC100-260V 50Hz/60Hz  
 Consumption: 50W/120W  
 Lamp: 3W\*36\* LED lamp R12G12B12  
 Channel: 7CH  
 Mode of control: DMX512, automatic, voice active.  
 Function: Can make magic, color mixed, charming effect  
 Packing size: 290\*290\*410mm

SKU: 690



RGB



IP20

### Laser RGB5000



Voltage: AC90-240V, 50/60HZ  
 Consumption: 120W  
 Scanner: 25kkps  
 Laser power:  
 1x1000mW Red 638nm,  
 1x1000mW Green 520nm,  
 1X3000mW Blue 450nm  
 Colors: RGB full color  
 Control signal: DMX-512  
 Control mode: music, auto, master-slave and DMX-512, ILDA control  
 DMX channel: 10/34ch  
 Size: 270x200x160 mm  
 Weight: 5.5 kg

SKU: 166



IP20



### 3pcs \*60W warm white + 36 \*3W RGB

Input voltage: 100-240Vac/50-60Hz  
 Product power: 250W  
 Light source: 3pcs \*60W warm white + 36 \*3W RGB  
 Channel: 14CH/22CH  
 Control mode: DMX512, master/slave,  
 self-propelled, voice control  
 Dimming method: 0-100% ultra-smooth dimming  
 Strobe: 25 times/sec

SKU: 128



RGB



IP20

### Laser RGB3000



Voltage: AC90-240V, 50/60HZ  
 Consumption: 120W  
 Scanner: 25kkps  
 Laser power:  
 1x500mW Red 638nm,  
 1x800mW Green 520nm,  
 1X1700mW Blue 450nm  
 Colors: RGB full color  
 Control signal: DMX-512  
 Control mode: music, auto, master-slave and DMX-512, ILDA control  
 DMX channel: 10/34ch  
 Size: 270x200x160 mm  
 Weight: 5.5 kg

SKU: 165



IP20



### WATERPFOOR RGBW 4in1 Flat Par 18

Voltage: AC100-240V  
 Frequency: 50Hz-60Hz  
 Consumption: 180W  
 Lamp: 18pcs10W RGBW 4in1 LED  
 Channel: 8/4CH  
 IP rate: IP65  
 Mode of control: DMX512, Auto, Sound, Master-slave.  
 Function: Can make magic, color mixed, charming effect  
 Net weight: 3.7KG

SKU: 129



RGB+W



IP20

### Laser RGB1000



Voltage: AC90-240V, 50/60HZ  
 Consumption: 120W  
 Scanner: 20kkps  
 Laser power:  
 1x170mW Red 638nm,  
 1x100mW Green 520nm,  
 1X700mW Blue 445nm,  
 Colors: RGB full color  
 Control signal: DMX-512  
 Control mode: music, auto, master-slave and DMX-512, ILDA control  
 DMX channel: 10/34ch  
 Size: 270x200x160 mm  
 Weight: 5.5 kg

SKU: 164



IP20



### 7x100W Waterproof White Halogen Lamps

Work voltage: 220V/50-60Hz  
 Light source: 7x100W Halogen lamps (philips)  
 Power consumption: 700 W  
 Color temperature: 1650K-6500k  
 Control mode: Auto-run , Master-Slave , DMX control  
 DMX channel: 1CH/6CH /7CH  
 DMX connector: 3+5 pin XLR connector (selected)  
 Display: Color LCD display  
 Installation Tripod stand /Hang on /Base  
 Reflector bowl color: Silver  
 Size: 456\*520\*130 mm  
 Weight: 7.65KG

SKU: 967



IP65



Battery

### 7x12W Waterproof RGB 6IN1 LED PAR Light Battery - Wireless

Waterproof 7x12W RGB 6IN1 Battery Wireless Led Par  
 Light source: 7pcs 15w LED 4in1 mixing color  
 Beam Angle: 25°  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 Working Environment: -20-40  
 DMX Channels: 2 DMX modes, 4channels mode & 8 channels mode  
 Control Mode: DMX512,Master-slave,Sound,Auto,Wireless,remote.  
 Battery type: Lithium Ion  
 Battery Charge Time: 3hours(full power)  
 Battery Life: 3.5(all on) hours,14 (single Color) hours  
 Battery Power: 24V, 5Ah  
 Wireless effective distance: 400meters

SKU: 940



RGB



IP54



### Waterproof 44x10w RGBW 4in1 Led wall light

Power Supply: AC 90-240V/50-60Hz  
 Power consumption: 450W  
 Light source: 44pcsx10W RGBW Led  
 Beam Angel: 25-35°  
 Dimmer: 0-100% dimmer  
 IP rate: IP67,outdoor  
 Control Mode: RDM, DMX512 Control, Sweden Import wireless DMX

SKU: 66127



RGB+W



IP67



Battery

### 7x8W Waterproof RGB 6IN1 LED PAR Light Battery - Wireless

Light source: 7pcs 8w LED 4in1 mixing color  
 Beam Angle: 25°  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 Working Environment: -20-40  
 DMX Channels: 2 DMX modes, 4channels mode & 8 channels mode  
 Control Mode: DMX512,Master-slave,Sound,Auto,Wireless,remote.  
 Battery type: Lithium Ion  
 Battery Charge Time: 3hours(full power)  
 Battery Life: 3.5(all on) hours,14 (single Color) hours  
 Battery Power: 24V, 5Ah  
 Wireless effective distance: 400meters

SKU: 941



RGB



IP54



Battery

### 9\*10W Wifi control Waterproof RGBA+UV 6 in 1

Power Supply: AC 100-240V/50-60Hz  
 Power consumption: 90W  
 Light source: 9pcs LED RGBWA+UV 6in1 mixing color  
 Beam Angel: 15°  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 Working Environment: -20-40  
 DMX Channels: 2 DMX modes, 6channels mode & 10 channels mode  
 Control Mode: DMX512,Master-slave,Sound,Auto,Wireless,remote, wifi  
 Battery type: Lithium Ion  
 Battery Charge Time: 6 hours  
 Battery Life: (all on) 4 hours, (single Color) 24hours  
 Battery Power: 12V, 25Ah

SKU: 932



RGB+UV



IP54



Battery

### 24X3W RGB 3IN1 LED Wall Washer Battery - Wireless

Power Supply: AC 100-240V/50-60Hz  
 Power consumption:80W  
 Light source: 24pcs\*3w LED RGB 3in1 mixing color  
 Beam Angle: 10/20/25 degree  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 Control Mode: DMX512,Master-slave,Sound,Auto, remote  
 Build-in more than 9 build-in programs  
 Generate endless effects with built-in, automated programs  
 Product size: 1030x62x58mm

SKU: 936



RGB+W



IP20

### Pixel control 18\*10w RGBW 4in1 LED Wallwasher

Voltage: AC90V-245V/50-60Hz  
 Power: 200W Light source  
 Pixel control: 18\*10w RGBW 4in1 LED wash  
 Beam angle: 15° or 40° Rate :use indoor only  
 Leds: 18pcs 10W RGBW 4IN1 LEDS  
 Life time: >100 thousand hours  
 Color: RGBW Wcolor can be mixed to more than 16.7million kinds of color  
 Function effect: dimmer, strobe, eotic, gradual change



SKU: 993



### Compact Pinspot LED 40W RGBW 4in1 Par with manual zoom

Power Supply: AC 100-240V/50-60Hz  
 Power consumption: 40W  
 Light source: 40 W RGBW 4in1 LED  
 Beam Angle: 40°  
 Zoom range: 4~60° manual zoom  
 Dimmer: 0-100% dimmer  
 Strobe rate: 0-20HZ  
 Working Environment: -20-40  
 IP rate: IP20,indoor  
 DMX Channels: 6ch  
 Control Mode: DMX512,Master-slave,Sound,Auto, Remote  
 Net weight: 2kg

SKU: 990



### 5 Head Matrix Blinder

Voltage: AC100-240V 50/60Hz  
 Power: 60W  
 Light source: 5PCS 10W CREE RGB 3in1 LED  
 Function: Color mix, automatic color change, built-in program and strobe effect with adjustable speed, dimmer, master/slave  
 Light size: 620\*130\*160mm  
 Weight: 4kg



SKU: 992



### 1000W LED Strobe RGB

Voltage: AC110-240V, 50/60HZ  
 Consumption: 1000W  
 Light source: 800pcs 1.2w SMD RGB LEDs  
 Channel: 1CH /3CH/6CH  
 IP rate: IP20  
 Display Panel: LED Blue Display  
 Housing material: Black Aluminum shell  
 Mode of control: DMX512,Master-slave,Sound,Auto  
 Dimension: 510\*220\*305mm  
 Weight: 5.7kgs

SKU: 995



### LED COB Blinder 2X100 W

LED: 2pcs\*100W COB LED  
 Light Color: Single color WW(100W)  
 LED light time: over 50000 hours  
 Voltage: AC 100V-240V 50-60Hz  
 Power consumption: 260W  
 Beam angle: 30 degree  
 Dimmer: 0-100% linear adjustable  
 Strobe: Variable speed (1-30Hz)  
 Refresh rate: 11700Hz , 100% flicker free for film and TV camera  
 Color effect feature: with individual control effect  
 Power input: powercorn connector  
 Housing material: Metal  
 Control mode: DMX512,Master/Slave,Auto,Sound alone,Sound active  
 DMX Channel: 2/5 CH



SKU: 994



### Battery Mini 4 \*10W RGBWA+UV 6in1 LED PAR

Power Supply: AC 100-240V/50-60Hz  
 Power consumption: 40W  
 Light source: 4pcs 10W LED RGBWA+UV 6in1 mixing color  
 Beam Angle: 15°  
 Dimmer: 0-100% dimmer  
 Strobe rate: 0-24HZ  
 Working Environment: -20-40  
 IP rate: IP20,indoor  
 DMX Channels: 6CH ,10CH  
 Control Mode: DMX512, Master-slave,Sound,Auto, Remote

SKU: 988



NEW PRODUCT



### LED PAR 712E

SKU: 66442

Life Span: 50000H  
 Light Source: 7x12W 4-IN-1 LEDs (RGBW) 60x0.2W 3-IN-1 LEDs (RGB)  
 Optics: 25°Beam angle (other angles optional) 35°Field angle  
 Color System: RGBW for main light, CTO, 2800K-5600K c  
 Strobe Effect: 0-25Hz LED shutter/strobe effect with variable speed  
 Dimming System: 0-100% Smooth linear LED dimming  
 Control System: 7/8/10/18/184 DMX-512  
 Display System: 1.44" TFT LCD display  
 Product Dimensions: 101(D)/258(W)/264.5(H)mm  
 Net Weight: 2.2kg

NEW PRODUCT



### 12W RGB scanner laser bar

SKU: 66107

Configuration W2000(R500 + G400 + B1.2W) x 6pcs  
 Rated Voltage: AC100~240V 50/60Hz;  
 Power consumption: ≤200W  
 Laser color: RGB full color  
 Beam diameter: φ15mm  
 Motor: 7pcs 42 high torque stepper motor  
 Modulation: analog  
 Rotation: Y axis 240° rotation, each head 140° rotation  
 Channel: 14/35/42CH  
 Control mode: sound/ automatic/DMX512/ master-slave  
 Control technology: RDM data bidirectional transmission  
 DMX512 upgrade  
 Operating requirement: dry, less dust, 0~35

NEW PRODUCT



### LED PAR P3245

SKU: 66443

Life Span: 50000H  
 Light Source: 324\*0.5W 5730 LEDs (WW+CW)  
 9 Individual control rings  
 Optics: 120°Field angle  
 Color System: Warm white cold white, CTO, 2800K-5600K  
 Strobe Effect: 0-25Hz LED shutter/strobe effect with variable speed  
 Dimming System: 0-100% Smooth linear LED dimming  
 Control System: 3/4/5/8/9 DMX-512, master-slave, sound or auto, IR Remote control, RDM  
 Display System: 1.44" TFT LCD display  
 Product Dimensions: 101(D)\*258(W)\*264.5(H)mm  
 Weight: 2.03kg

NEW PRODUCT



### 12W RGB Laser Bar Hot Wheels

SKU: 66109

Configuration: W2000C(R635-500mW/G525-400mW/B450-1.2W) x6pcs  
 Rated voltage: AC100~240V 50/60Hz 140W@AC220V  
 LED strobe source: 0.2W RGB x90pcs  
 Control mode: Sound/ Automatic/Master-slave/DMX512(25CH/55CH)  
 Control interface: 3 pin DMX512IN/OUT  
 Effect: 16 kinds of Auto dynamic effect, built-in rich color macro function control  
 Laser effect: Beam  
 LED effect: Strobe  
 X axis: infinite rotation  
 Single axis stroke: 0-140° scanning range  
 Scanning system: precision stepping motor  
 Electronic control technology: RDM data bidirectional transmission  
 DMX512 upgrade  
 Cooling system: low noise air cooling  
 Working environment: indoor  
 Operating requirement: dry, less dust, 0~35

NEW PRODUCT



### LED PAR IP3245

SKU: 66444

Light Source: 324\*0.5W 5730 LEDs (WW+CW)  
 9 Individual control rings  
 Optics: 120°Field angle  
 Color System: Warm white cold white, CTO, 2800K-5600K  
 Strobe Effect: 0-25Hz LED shutter/strobe effect with variable speed  
 Dimming System: 0-100% Smooth linear LED dimming  
 Control System: 3/4/5/8/9 DMX-512, master-slave, sound or auto, IR Remote control, RDM  
 Display System: 1.44" TFT LCD display  
 Product Dimensions: 101(D)\*258(W)\*264.5(H)mm  
 Weight: 2.03kg

NEW PRODUCT



### 2W RGB Beam laser

SKU: 66110

Configuration W2000C(R500+G400+B1200)  
 Operation voltage: AC100~240V 50/60HZ  
 Power consumption: ≤35W  
 Control model: auto/master-slave/Dmx512  
 Control interface: 3 pin Dmx512  
 Color: RGB  
 Effect: one beam RGB effect  
 Channel: 7CH  
 Application: disco, clubs, KTV, pub, bar, family party  
 Working temperature: 0-35



NEW PRODUCT



### 12W RGB Laser Bar

SKU: 66106

Configuration W2000(R500 + G400 + B1.2W) x 6pcs  
 Rated Voltage: AC100~240V 50/60Hz;  
 Power consumption: ≤200W  
 Laser color: RGB full color  
 Beam diameter: φ15mm  
 Motor: 7pcs 42 high torque stepper motor  
 Modulation: analog  
 Rotation: Y axis 240° rotation, each head 140° rotation  
 Channel: 14/35/42CH  
 Control mode: sound/ automatic/DMX512/ master-slave  
 Control technology: RDM data bidirectional transmission  
 DMX512 upgrade  
 Operating requirement: dry, less dust, 0~35

NEW PRODUCT



### 960 Strobe

SKU: 66416

Voltage: AC100 ~ 240V 50 / 60Hz  
 Power: 38V / 280W  
 Lamp beads: 864 5050 three color LED lamp beads + 96 white LEDs  
 Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function.  
 DMX channels: Ch11, ch39, ch39  
 Dimming: 32bit 0 ~ 100% linear dimming  
 Features: 8 + 8 section horse running + dyeing + Flash  
 Operating temperature: - 30 ~ 50  
 Stroboscopic frequency: 1 ~ 30Hz  
 Appearance: metal, black  
 Connection mode: DMX512 input / output / power input / output.  
 IP class: IP20  
 Packing Size: 510x300x135 MM  
 Product Weight: 3.6 kg

NEW PRODUCT



### 7x15w 4in1 LED Bar

SKU: 66226

Voltage: AC100~240V 50/60HZ  
 Power: 180W  
 Lamp beads: 7pcs 4 in 1 lamp beads  
 Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function  
 Channel: CH18, CH42  
 Dimming: 32bit 0~100% linear dimming  
 Features: XY moving head + beam + burst flash + XY induction  
 Operating temperature: -30 degrees ~ 50 degrees  
 Strobe frequency: 1~30HZ  
 Appearance: Metal, black  
 Connection: DMX512 input and output / Power input and output.  
 IP Rating: IP20  
 Dimensions: Height: 23.5cm Length: 58 cm Width: 18 cm  
 Weight: 5.9 kg

NEW PRODUCT



### 960 Moving Strobe

SKU: 66417

Voltage: AC100~240V 50 / 60HZ  
 Power: 350W  
 Light beads: 960 RGB + W, 12 + 12 segments  
 Control mode: DMX512, self-going, master, slave, voice control, with RDM function.  
 Channel: CH 8, CH 20, CH52  
 Dimming: 16 bit 0~100% linear dimming  
 Features: flash + dyeing + effect + shake the head  
 Operating temperature: -30 degrees ~50 degrees  
 Strobe frequency: 1~30HZ  
 Appearance: Metal, black and Silver  
 Connection mode: DMX512 IO / power IO.  
 IP level: IP20  
 Size: 280x85x260 mm  
 Product Weight: 6.5 kg

NEW PRODUCT



### 10x30W RGBW LED Bar

SKU: 66103

Power: 350w  
 LED Source: 10pcs 30w RGBW LED Chips  
 Zoom: 7-50degrees  
 Tilt: 210degrees  
 Control: DMX512 ,AUTO , MUSIC, PIXEL MAPPING  
 Cooling: fan, temperature control, overheating protect  
 Dimmer: 0-100% electronic  
 Shutter: Max 10Hz electronically  
 Connector: XLR 3 pin in and out Power con in and out

NEW PRODUCT



### 480PCS LED 5050 RGB+240PCS White LED Strip Strobe Light

SKU: 66351

Power supply AC90240V 50Hz/60Hz  
 Rated power 200W  
 Light source 480x0.2w 5050 RGB+240x1W white  
 Strobe frequency 1-30Hz  
 Control channel 4CH/11CH/140CH DMX-512 signal channel  
 Dimming 0~100% linear dimming  
 Features: 60 segments horse racing, 40 segments of RGB color light+20 segments of white light, dyeing, flash  
 Control mode: DMX-512, auto, master-slave, voice control, with RDM function  
 Size: 103x10x15 cm  
 Weight: 3.4 kg

### 4x10W Wifi Control RGB 6IN1 Charging F Case



Battery

Power Supply: AC 100-240V/50-60Hz  
 Power consumption: 40W  
 Light source: 4pcs LED RGBWA+UV 6in1 mixing color  
 Beam Angle: 15°  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 DMX Channels: 2 DMX modes, 6channels mode & 10 channels mode  
 Control Mode: DMX512,Master-slave,Sound,Auto,Wireless,Wifi, Remote  
 Battery type: Lithium Ion  
 Battery Charge Time: 3 hours(full power)  
 Battery Life: (all on) 6hours, (single Color) 36hours  
 Battery Power: 12V, 10Ah  
 Wireless effective distance: 400meters  
 Product size: 140\*140\*200mm



RGB+WA



IP20

SKU: 935

### Beam Moving Head Double Prism



Voltage: 100-240V 50/60Hz  
 Power: 230W  
 Channel: 16ch  
 Light source: 230W Lamp  
 Gobo wheel: 17 metal gobos+white  
 Color wheel: 14 colors+white  
 8/16prism/24prism optional ,prism rotation  
 Lens : 6-layer optic glass lens  
 Motor : 2-phase step motors  
 Features: moving more smoothly and no shake  
 The channel list is same with Clay Paky  
 Display : Roller Button screen  
 Size: 410x460x510mm



IP20

SKU: 685

### 9X10W RGB 6IN1 LED PAR Light Charging F Case - Wireless Transmitter



Battery

Power consumption: 90W  
 Light source: 9pcs LED RGBWA+UV 6in1 mixing color  
 Beam Angle: 15°  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 DMX Channels: 2 DMX modes, 6channels mode & 10 channels mode  
 Control Mode: DMX512,Master-slave,Sound,Auto,Wireless.  
 Battery type: Lithium Ion  
 Battery Charge Time: 6 hours  
 Battery Life: (all on) 4 hours, (single Color) 24hours  
 Battery Power: 12V, 25Ah  
 Wireless effective distance: 400meters



RGB+WA



IP20

SKU: 937



### Compact Mini Beam 7R Moving Head Light

Voltage: 100-240V 50/60Hz  
 Power: 250W  
 Channel:16ch  
 Light source: 230W Lamp  
 Gobo wheel: 14 metal gobos+white  
 Color wheel:13 colors+white  
 8facet prism ,prism rotation  
 Lens : 6-layer optic glass lens  
 Motor : 2-phase step motors  
 Features: moving more smoothly and no shake  
 The channel list is same with Clay Paky  
 Size: 310x220x440mm



IP20

SKU: 686

### 6X10 RGB 6in1 Battery LED PAR Light



Battery

Power consumption: 60W  
 Light source:6pcs LED RGBWA+UV 6in1 mixing color  
 Beam Angel: 30°  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 DMX Channels: 2 DMX modes, 6channels mode & 10 channels mode  
 Control Mode: DMX512,Master-slave,Sound,Auto,Wireless.  
 Battery type: Lithium Ion  
 Battery Charge Time: 4 hours  
 Battery Life: (all on) 3.5hours, (single LED) 21hours  
 Battery Power: 12V, 15Ah  
 Wireless effective distance: 400meters



RGB+WA



IP20

SKU: 938



### Beam Moving Head 330 15R

Power Supply: AC110v-240V 50/60hz  
 Power:350w  
 Light source: 15R 330w lamp  
 Ballast:electronic ballast  
 Lens: 6-Layer option glass lens  
 Beam angle parallel beam angel :0-3.8°  
 Channel:16ch  
 Color temperature:8000K  
 Prism: prism 1: Floral prism rotation, prism 2: 8 Prism rotation  
 Gobo: 13 gobos+blank double rotation rainbow effect  
 Colors 13 color+blank,single rotation rainbow effect  
 Focus: option focus  
 Mode of control: DMX512/Master-slave/Stand-alone /Auto mode  
 Pan: 540degree (16bit) Electric correction  
 Tilt:270degree (16bit) Electric correction



IP20

SKU: 687



### 60W LED Spot Moving Head +12x0.2W RGB

Input Voltage: AC100V-240V,50-60HZ  
 Total power: 100W  
 Light source: 1x60W white lamp bead, 12 RGB 0.2W lamp bead  
 Pattern: 7 patterns + white light  
 Color: 7 colors + white light  
 Channel: 10/12CH  
 Control mode: Voice control, master - slave, self - walk, DMX  
 Level: X axis: 540° Y axis: 270°

SKU: 66122



### 37x15w RGBW 4in1 Moving Head

Input Voltage: AC100V-240V,50-60HZ , rated power 600W  
 Light source: 37 15W high brightness quad-bead, light source life: 50000 hours on average  
 Zoom Angle: 5-60°  
 Stroboscopic flashing: 1-25 times/second  
 Control signal: DMX512, master/slave, voice control or self - program  
 Control channel: 20/60 two DMX channel modes  
 Applicable environment: indoor  
 Color: red, green, blue and white in one  
 Level: 540 degrees +16bit fine tuning;  
 Vertical: 270 degrees +16bit fine tuning  
 Product size: 386 mm\*423 mm\*263 mm

SKU: 66126



### 37x15w RGBW 4in1 Moving Head

Input Voltage: AC100V-240V,50-60HZ , rated power 600W  
 Light source: 37 15W high brightness quad-bead, light source life: 50000 hours on average  
 Zoom Angle: 5-60°  
 Stroboscopic flashing: 1-25 times/second  
 Control signal: DMX512, master/slave, voice control or self - program  
 Control channel: 20/60 two DMX channel modes  
 Applicable environment: indoor  
 Color: red, green, blue and white in one  
 Level: 540 degrees +16bit fine tuning;  
 Vertical: 270 degrees +16bit fine tuning  
 Product size: 386 mm\*423 mm\*263 mm

SKU: 66123



### 280W Beam Spot Wash 3in1 135pcs 0.5W RGB LED

Voltage: 220V AC, 50Hz  
 Power: 380 w  
 Bulb size: 300W high power white light  
 LED color panel: basic color 9 + white light  
 Fixed pattern: 10 patterns + white light, pattern flow from slow to fast  
 Rotating pattern plate: 7 patterns + white light,  
 Prism: 6 prism +6 row mirror + atomizing mirror  
 Focus: Electronic focus, 6 degrees to 24 degrees linear zoom  
 Rotation Angle: horizontal direction 540°, vertical direction 270°  
 Control mode: DMX512, 18 channels  
 Operating mode: Single-machine mode, controller mode,  
 Size: 275\*245\*411mm

SKU: 66230



### 400W BSW 3in1 moving head with CMY and CTO

Input Voltage: AC100V-240V,50-60HZ Power Consumption: 430W  
 Color temperature: 8000K  
 Light source specification: SSL350W Lumen illuminance: 4 meters 80,000 lm  
 Focusing system: linear adjustment from 4 meters to 50 meters  
 Atomization system: 1 independent atomization effect, soft and natural light spot  
 High-speed strobe: 0-30 times/sec. Adjustable speed strobe effect.  
 Color: 12 colors + white light. Color half-color function  
 Color system: independent CMY+CTO color mixing system  
 Fixed patterns: 12 fixed patterns + white light  
 Prism system: standard single 6-row prism and 8 + 8 prism, each prism can be independently forward and reverse  
 Product size: 380\*270\*650 mm

SKU: 66125



### 5x60w Pixel Beam Wash Strobe Bar Led Moving Head

Input Voltage: AC100V-240V,50-60HZ Power Consumption: 500W  
 Light Source: Front: Original Osram 5x 60W RGBW 4in1 LED;  
 Back: 42x 3W White LED + 84x 0.3W RGB 3in1 LED  
 LED Control Feature: Front: 5pcs RGBW LED each Pixel control; Back: 14 sections pixel control, each section 9pcs led.  
 Control mode: DMX512,Sound, Master/Slave, Auto run&Sound active  
 Channel: 24CH/29CH/105CH - Zoom: 3.8° - 50°  
 Pan/Tilt movement: 360 degree infinite rotating  
 Power connector: Powercon in/out  
 DMX connector: 3-pin XLR in/out  
 Effect: Beam , Wash , Strobe Multiple Effect, Pan Tilt infinite rotating

SKU: 66124



NEW PRODUCT



### WATERPROOF RGBW 4in1 Flat Par 18

SKU: 66400

Voltage: AC100-240V  
 Frequency: 50Hz-60Hz  
 Consumption: 180W  
 Lamp: 18pcs10W RGBW 4in1 LED  
 Channel: 8/4CH  
 IP rate: IP65  
 Mode of control: DMX512, Auto, Sound, Master-slave.  
 Function: Can make magic, color mixed, charming effect  
 Net weight: 3.7KG

NEW PRODUCT



### 19x15W LED PAR ZOOM 135pcs 0.5W RGB LED

SKU: 66104

Power consumption: 300W  
 Voltage: AC 100V-240V,50-60Hz  
 Light source: 19pcs 15w 4-IN-1 LEDs (R, G, B, W)  
 Zoom range: 15-60degree  
 Operation mode: DMX512, master-slave, Sound, Auto  
 Channels: 5 modes: mode1: 32CHs; mode2: 16CHs;  
 mode3: 10CHs; mode4: 5CHs; mode5: 32CHs  
 Dimmer: 0-100% smoothly dimmer  
 Strobe: 20t/s strobe effect with variable speed  
 Protection level: IP20

NEW PRODUCT



### LED Battery Butterfly light

SKU: 66371

Voltage: 110V-240V/50-60Hz  
 Power: 25W  
 Light Source: 2x12W RGBW Leds  
 Channel: 9ch  
 Control mode: DMX512, Wireless DMX, Remote,  
 Sound, Master-slave, Auto  
 Size: 300.4x231.7x279.5 mm  
 Weight: 3.22kg  
 Battery charge time: 3hours  
 Battery using time: About 7-8 hours  
 Battery capacity: 5000mAH

NEW PRODUCT



### 9x40W LED Beam light with 135pcs 0.5W RGB LED

SKU: 66120

Power Supply: 90v-240v/50-60Hz  
 Power consumption: 40W  
 Light source: 9pcs led  
 Effect: Light beam and wash  
 Dimmer: 0-100% dimmer  
 Channel: 4/10/36/46CH  
 Control Mode: DMX512

NEW PRODUCT



### 40x10w 4in1 LED Wash light

SKU: 66102

Power supply 100-240V 50/60Hz  
 Power: 480W  
 LAMP SOURCE: 40x10W RGBW LEDs,  
 Feature: small size, high power, super brightness, colour mixture  
 Beam Angle: 40°  
 Tilt: 210°, 16 bit  
 IP rate: IP65  
 Dimmer: 0-100% linear electronic dimmer, no flicker or jitter occurs  
 Strobe: Adjustable speed stop/strobe effect,  
 Size: 450\*131\*310mm  
 Protocol: DMX-512  
 DMX channels: 4/8CH  
 Connections: 3-pin XLR DMX input/output  
 Display: Easy-to-use 4-button control panel with LCD display  
 Operating modes: DMX512, master/slave, auto, sound

NEW PRODUCT



### Waterproof blinder 4x100W LED COB 135pcs 0.5W RGB LED

SKU: 66305

Input Voltage: AC100-240V 50-60Hz  
 Power: 415W  
 LED: 4pcs 100w warm white COB LED  
 Beam angle: 50degrees  
 Field angle: 80degrees  
 Strobe: 1-30Hz  
 Dimming  
 DMX channel: 4/8ch  
 IP Rating: IP65  
 Cooling: Waterproof fan+ die-casting aluminum  
 Net weight: 6KG



### 120w Moving Head

Working voltage: AC95V-245V/50Hz  
 Product power: 120W  
 Pattern parameters: 10 patterns, 8 colors 4. Lamp bead parameters: 1 100W white light bead  
 Control mode: international general DMX512, 10 channels  
 Working mode: DMX512, master/slave, self-propelled, voice control  
 Dimming mode: 0~100% ultra-smooth dimming  
 Strobe: 20 times/second  
 Opening size: 22cm deep 8cm

SKU: 977



IP20



### Mini Beam 100W

Power: 150W  
 Light source: 1pc 100W LED White color  
 Working lifetime: About 50000 hours  
 Working temperature: -20-40  
 Control mode: DMX 512, Auto, Master-slave, sound  
 Power Socket: Powercon In/Out  
 DMX socket: 3pin DMX In/Out  
 Prism: 8 prisms  
 Color wheel: 7colors+white  
 Gobo wheel: 7gobos+white  
 Size: 330x280x260mm

SKU: 973



IP20



### 120W Three Prism Wash Gobo 2in1 Moving Head

Working voltage: AC95V-245V/50Hz  
 Total product power: 140W  
 Pattern parameters: 8 patterns, 8 colors 4. Lamp parameters: 1 80W white lamp, 6 5050 8W RGBW lamp beads  
 Control mode: international general DMX512, 15 channels  
 Working mode: DMX512, master/slave, self-propelled, voice control  
 Dimming mode: 0~100% ultra-smooth dimming  
 Strobe: 20 times/second  
 Opening size: 22cm deep 8cm

SKU: 974



RGB+W



IP20



### 4 LED Wash Moving Head

Working voltage: AC95V-245V/50Hz  
 Power sumption: 100W  
 Control mode: DMX512, auto, sound, master-slave  
 Channel: 15/10CH  
 Dimmer: 0-100% super dimmer  
 Strobe: 25 times per second

SKU: 976



IP20



### 100W Small Steel Cannon Moving Head

Working voltage: AC95V-245V/50Hz  
 Product power: 100W  
 Pattern parameters: 10 patterns, 8 colors 4. Lamp bead parameters: 1 80W white light bead  
 Control mode: international general DMX512, 10 channels  
 Working mode: DMX512, master/slave, self-propelled, voice control  
 Dimming mode: 0~100% ultra-smooth dimming  
 Strobe: 20 times/second  
 Opening size: 22cm deep 8cm

SKU: 975



IP20



### Mini Beam 100W

Power: 150W  
 Light source: 1pc 100W LED White color  
 Working lifetime: About 50000 hours  
 Working temperature: -20-40  
 Control mode: DMX 512, Auto, Master-slave, sound  
 Power Socket: Powercon In/Out  
 DMX socket: 3pin DMX In/Out  
 Prism: 8 prisms  
 Color wheel: 7colors+white  
 Gobo wheel: 7gobos+white  
 Size: 330x280x260mm

SKU: 977



IP20



### Fully embedded magic ball 3in1

Working voltage: AC95V-245V/50Hz  
 Product power: 40W (magic ball 15W, strobe 20W, 30mW red and green laser)  
 Lamp bead parameters: 1 15W Osram 4 in 1 lamp bead, 2 10W strobe, 30mW red and green laser  
 Control method: international general DMX512, 13 channels  
 Working mode: DMX512, master/slave, self-propelled, voice control  
 Dimming method: 0~100% super smooth dimming  
 Strobe: 20 times/second  
 Hole size: 20cm deep 18cm

SKU: 66374



IP20



### Six Bee Eye Laser

Working voltage: AC220V/50Hz  
 Product power: 80W  
 Lamp parameters: 6\*10W four-in-one and 1\*50mW green laser  
 Control method: international general DMX512, 9 channels  
 Working mode: DMX512, master/slave, self-propelled, voice control  
 Dimming method: 0~100% super smooth dimming  
 Strobe: 20 times/second  
 Hole size: 20cm deep 18cm

SKU: 66375



IP20



### Fully embedded COB surface light

Working voltage: AC110-240V/50Hz  
 Product power: 100W  
 Lamp bead parameters: 100W dual color temperature lamp bead  
 Control method: international general DMX512, 4 channels  
 Working mode: DMX512, master/slave, self-propelled, voice control  
 Dimming method: 0~100% super smooth dimming  
 Strobe: 25 times/second  
 Hole size: 20cm deep 18cm

SKU: 66377



IP20



### Fully Embedded Butterfly Laser

Laser: 500MW green light/150MW red light  
 Lamp bead: LED 4 in 1 RGBW 2x10W Voltage: AC110/240V 50-60Hz  
 Power: 50W Strobe LED: 20W white light  
 Control: DMX512, voice control, master-slave, self-propelled  
 Function: dot matrix effect, music dynamic opening size: 20cm deep 18cm"

SKU: 66373



IP20



### Fully embedded 24 dyeing

Working voltage: AC110-240V/50Hz  
 Product power: 80W  
 Lamp parameters: 6 x RGBW monochrome 3W  
 Control method: international general DMX512, 6 channels  
 Working mode: DMX512, master/slave, self-propelled, voice control  
 Dimming method: 0~100% super smooth dimming  
 Strobe: 25 times/second  
 Hole size: 20cm deep 18cm

SKU: 66376



IP20



### Full color animation Laser

500MW power: green 80mw, red 350mw blue 150mw)  
 1000MW Power: Green 100mw, Red 300mw, Blue 600mw Playback system: DMX512, voice control, automatic,  
 Control system: high-speed galvanometer; scanning angle  $\pm 20^\circ$   
 Program effect: show beam effect in three-dimensional space, enhance space  
 Control interface: DMX512 (12 control channels)  
 Power supply: AC 110/220V 50/60HZ  
 Hole size: 20cm deep 18cm

SKU: 66372



IP20

### 60W RGBW LED 5050 SMD 3in1 MINI Moving Head



Input Voltage: AC100V-240V,50-60HZ  
 Power Consumption: 60W  
 Light Source: 60W RGBW LED with 5050 SMD 3in1 MINI moving  
 Control mode: DMX512,Sound, Master/Slave, Auto run&Sound active  
 Channel: 16/21 CH  
 Beam Angle: 8°  
 Product Size:160/150/230cm



SKU: 965

### Remote control LED 30W spot moving head



Voltage: AC100-240V, 50/60HZ 60W  
 Light Source: 1pc\*30W White Lamp Bead  
 Laser: Green 80mW  
 Control Channel: 9/11CH  
 Control Mode: Auto,DMX512,Master-slave,Sound  
 Pan/Tilt": 540 degrees / 270 degrees



SKU: 123

### 6x10W Bee Eyes Shaking Head + Laser



Voltage: AC100-240V 50/60 HZ  
 Total power: 120W  
 Light source 1: 6 Cree+ 10W four-in-one (RGBW) lamp beads  
 Light source 2: 1 515nm green laser  
 Channel: 15CH  
 Control mode: DMX512, master-slave, self-propelled, voice control  
 X-axis: 540°  
 Y-axis: 180°



SKU: 966

### 260 9R Beam Moving Head



Voltage: AC90-260V 50/60hz Power: 450W  
 Source: YODN MSD 260W 9R,  
 Average Lamp Life: 2000H Lumen Output: 10400LM  
 Color Wheel: 14 color + white, halftone effect adjustment  
 Gobo Wheel: 11 patterns + white  
 Prisms: 8prism + Honeycomb prism (2 prisms can be superimposed to 40, can be two-way independent rotation)  
 Pan: 540°(16bit accuracy) Tilt: 270°(16bit accuracy)  
 Motors: 14 super mute motors, XY three-phase motor  
 Frost/Atomization: independent frost effect, spot soft and natural  
 Channel: 16/20CHs  
 Size: 320\*220\*580mm (LWH)  
 Net Weight: 14.8kg



SKU: 124

### MINI 7x12W LED RGBW Moving Head



Input Voltage: AC100-240V/50-60Hz  
 Power consumption: 95W  
 Light Source: 7pcs 12W LEDs RGBW  
 DMX channel: 10CH/15CH  
 Control mode: DMX512,auto-run,sound-control,master-slave  
 Movement: Pan:540°Tilt:190°  
 Display: LED Display  
 Housing: LCP+Aluminium Alloy  
 Weight: 4.5kg  
 Dimension: 160\*150\*300 mm



SKU: 964

### 150W LED Beam Spot Wash 3in1 Moving Head



Voltage: AC100-240V,50/60Hz Power: 280W  
 Led source: 150W White LED  
 Led Life Time: 50000 Hours  
 Channel: 18 DMX channel  
 Pan: 540 degree + fine ; Tilt: 270 degree + fine  
 Zoom range: 8-17°  
 Strobe: 1-25 Hz with pulse effect  
 Color Wheel: 9 colors + open, with rainbow effect  
 Static Gobo Wheel: 10 gobos  
 Rotation gobo wheel: 6 gobos+open  
 Prism: 3 facet prism with bi-direction rotating  
 Frost: With frost effect  
 Display: LCD display, can adjust 180 degree to fit  
 Product size: 275\*200\*475mm  
 Net Weight: 9kg



SKU: 125



### 250W LED BSW Moving Head Light

Input Voltage: AC90-260V 50/60Hz  
 Power Consumption: 350W  
 Light Source: 250W High Output White LED  
 Control Signal: DMX 512, master-slave and sound activated or auto operation  
 Control Channel: 16/18 DMX Channels USITT DMX-512  
 Prism: 8-facet Prism, bi-directional rotatable at variable speeds  
 Dimensions: 320\*220\*480mm  
 Weight: 13.50kg

SKU: 981

LED



Light

IP20



### 60W LED Spot Moving Head Light

Voltage: 100-240V 50/60Hz  
 Power consumption: 80 W  
 Color: 8 colors  
 Gobo: 8 gobos  
 Channel: 9/11ch  
 Light source: 1PCS 60W high power White LED  
 Control: DMX, Sound, Master-slave, Auto  
 Size: 198\*144\*272 mm  
 Net weight: 3.2 kg

SKU: 689

LED



Light

IP20



### 80W LED Zoom Beam Moving Head

Input voltage: 110-260 V, 50/60 Hz Power: 150W  
 Light source: 80W LED  
 Working lifetime: About 50000 hours  
 Control mode: DMX 512, Auto, Master-slave, Sound  
 Channel: 16ch /20ch  
 2DMX Modes: STD (16ch)/EXT (20ch)  
 Prism: 8 linear prism rotating ,16 linear prism rotating  
 Color Wheel: 13 colors+white  
 Gobo Wheel: 11 gobos+white,gobo-flow effect,gobo shake  
 Function: Dyeing, strobe, zoom, light beam effect  
 Pan: 540° (16bit) Tilt: 270° (16bit)  
 DMX socket: 3-pin IN/OUT  
 Power socket: Power Con IN  
 Dimensions: 460\*250\*290mm

SKU: 982

LED



Light

IP20



### 10W LED Moving Head Spot

Input power: AC100-240V 50/60Hz  
 Power consumption: 22W  
 Output LUX: 1500 LUX at 3 meters  
 LED: 1 PCS 10W high power white Cree LED  
 DMX Channel: 9/11 channels  
 Pan:X axis 540 degree ; Tilt:Y axis 270 degree  
 Control mode: DMX512/Master-slave/Auto/Sound  
 Display: LCD display  
 Color wheel: 7 color+open  
 Gobo Wheel: 7 gobo+open, gobo-flow effect,gobo shake  
 Feature: 8 internal program, sound mode can control by DMX512  
 Beam angle: 13 degree  
 Net weight: 2.5kg  
 Size: 140\*160\*290 cm

SKU: 984

LED



Light

IP20



### 36\*18W RGBWA+UV LED Moving Head+Zoom Light

Input Voltage: AC90-260V 50/60Hz  
 LED: 36 \*18W 6in1 RGBWA+UV LED moving  
 Power Consumption: 650W  
 Control Channel: 18/15 DMX channels  
 Control Signal: DMX512, master-slave and sound activated or auto operation  
 Power connection: Powercon In DMX data In/Out: XLR 3pin(XLR 5pin is optional)  
 Packing Dimensions: 450\*320\*430mm  
 Weight: 9 kg

SKU: 983

LED



Light

IP20



### 6pcs LED Moving Head

Voltage: AC100V~240V/50~60Hz  
 Machine power: 120W  
 Lamp beads: 15W, RGBW four-in-one LED lamp beads  
 Lamp life: more than 50,000 hours  
 Lens: Lens Aspheric lens Supports DMX signal priority recognition, signal retention when DMX signal is interrupted  
 Beam angle: 1.5°  
 Spot angle: minimum 6°, maximum 51°  
 Color Rotation System: Color Rotation System: RGBW 4-in-1 Rotation, Macro Function Color System  
 Strobe: 1-30 times / sec electronic strobe and random strobe  
 Scanning system: horizontal 540° / 1.5 seconds, vertical 180° / 0.5 seconds

SKU: 986

LED



Light

IP20





### LED MOVING HEAD LB40

SKU: 66437

Light Source: 1\*40W White Laser 30\*0.2W 3-IN-1 RGB LEDs  
 Optics: Ø160mm Front lens 1.1° Beam angle  
 PAN: 2 modes 1. 360° Continuous movement 2. 540°(8/16 bit)  
 TILT: 2 modes 1. 360° Continuous movement 2. 270°(8/16 bit)  
 Color System: Color wheel with 17 dichroic colors 6-Color wheel with variable direction and speed control  
 Gobo System: 1 Static gobo wheel with 19 gobos plus open  
 Control System: 23/25 DMX channels USITT DMX-512 master-slave, sound or auto, IR Remote control, RDM  
 Prism 1: 8-Facet circular prism with variable speed  
 Prism 2: 3 different prisms, 5-Facet linear prism/16-facet circular prism/  
 8+16-facet circular prism with variable speed and direction  
 Display System: 1.44" TFT LCD display  
 Product Dimensions: 207(D)\*268(W)\*423.7(H)



### MOVING HEAD LASER 2WRGBW 4in1

SKU: 66108

Rated voltage: AC100~240V 50/60Hz  
 Power consumption: ≤100W  
 Scanner: 2W, 3W 25kpps, 4W 30K, scan angle: max±30°;  
 Input signal: ±5V; Linearity distortion <2%  
 Motor: 3 phase 42 motor 2pcs  
 Scan: X axis 540° rotation, Y axis 270° rotation  
 Modulation: analog  
 Beam diameter and divergence: 3\*6.5mm; 1.5mrad  
 Control mode: music(black out)/ automatic/master-slave/DMX-512(6/40CH)/ILDA  
 Control interface: 3 pin DMX512/25DB ILDA  
 DMX effect: Single pattern mode, and with the function of unique blanking, strobe, rotation, movement, billowing, zoom  
 Weight: 9.5 kg



### LED MOVING HEAD LB100

SKU: 66436

Light Source: 1\*100W White Laser 30\*0.2W 3-IN-1 RGB LEDs  
 Optics: Ø160mm Front lens 1.1° Beam angle  
 PAN: 2 modes 1. 360° Continuous movement 2. 540°(8/16 bit)  
 TILT: 2 modes 1. 360° Continuous movement 2. 270°(8/16 bit)  
 Color System: Color wheel with 13 dichroic colors 6-Color wheel with variable direction and speed control  
 Gobo System: 1 Static gobo wheel with 13 gobos plus open  
 Control System: 23/25 DMX channels USITT DMX-512 master-slave, sound or auto, IR Remote control, RDM  
 Prism 1: 3 different prisms, 5-Facet linear prism/8-Facet circular prism/4+8+16-facet circular prism with variable speed  
 Prism 2: 3 different prisms, 6-Facet linear prism/16-facet circular prism/8+16-facet circular prism  
 Display System: 1.44" TFT LCD display  
 Product Dimensions: 61.8(D)\*297.9(W)\*513.7(H)mm



### MOVING HEAD LASER 4W

SKU: 66362

Rated voltage: AC100~240V 50/60Hz  
 Power consumption: ≤100W  
 Scanner: 2W, 3W 25kpps, 4W 30K, scan angle: max±30°;  
 Input signal: ±5V; Linearity distortion <2%  
 Motor: 3 phase 42 motor 2pcs  
 Scan: X axis 540° rotation, Y axis 270° rotation  
 Modulation: analog  
 Beam diameter and divergence: 3\*6.5mm; 1.5mrad  
 Control mode: music(black out)/ automatic/master-slave/DMX-512(6/40CH)/ILDA  
 Control interface: 3 pin DMX512/25DB ILDA  
 DMX effect: Single pattern mode, and with the function of unique blanking, strobe, rotation, movement, billowing, zoom  
 Weight: 9.5 kg



### 120W LED Spot Wash Moving 7x 4W RGBW 4in1

SKU: 66208

voltage: AC100-240V, 50/60Hz Rated power: 180W  
 Lamp Beads: 120W White light +7x 4W 4-in-1 RGBW  
 Heat dissipation system: intelligent temperature control protection  
 Lens: high precision optical lens group  
 Beam Angle: 10 degrees  
 Working mode: DMX512 signal/master/slave/self-walking/voice control  
 Control mode: International DMX512, 15/20CH  
 Panel display: 0.39 inch 4 digit tube +4 keys  
 Scanning speed: horizontal 540°, vertical 270° / speed adjustable  
 Scan fine tuning: 8/16Bit  
 Scanning positioning: electronic automatic positioning  
 Color Plate: 7 colors + white light with rainbow effect  
 Pattern Plate: 8 patterns + white light, with pattern shake effect  
 Prism: Honeycomb prism, rotatable, adjustable speed





### 200W LED Spot Moving Head

Input Voltage: AC100-240V 50/60Hz  
 Power: 200W  
 Light Source: 1 LED (white) 200 W,  
 Beam Angle: 16°  
 Colors: 7 + white, split colors, continuous scroll at variable speeds  
 Rotation wheel (1): 6 + open (5 aluminum + 1 glass), rotating,  
 interchangeable, slot-n-lock, continuous scroll at variable speeds  
 Static wheel (2): 8 + open (8 stamped), continuous scroll at variable speeds  
 Prism: 3-facet round, bidirectional rotation at variable speeds  
 Strobe Rate: 0 to 15 Hz  
 DMX Channels: 10 or 16  
 Control mode : DMX 512, master-slave , sound , Auto  
 DMX connector : 3-pin XLR connectors IN/OUT  
 Dimension: 290x194x432mm



SKU: 681 3800156606814

Light

IP20



### 90W LED Spot Moving Head Light

Voltage: 100-240V 50/60Hz  
 Power: 120v 60Hz 148W(0.1A)max,2A inrush  
 Beam angle: 14degrees  
 Channel: 14ch  
 Light source: 1PCS 90W high power White LEDs  
 Life rated: more than 50,000hrs  
 Size: 250\*255\*360mm  
 Net weight: 6kg  
 Carton size: 370\*360\*340mm



SKU: 985

Light

IP20



### 120W LED Spot Pattern Moving Head

Input Voltage: AC100-240V 50/60Hz  
 Power: 120W  
 Light Source: 1 LED (white) 120 W,  
 Beam Angle: 16°  
 Colors: 7 + white, split colors, continuous scroll at variable speeds  
 Rotation wheel (1): 6 + open (5 aluminum + 1 glass), rotating,  
 interchangeable, slot-n-lock, continuous scroll at variable speeds  
 Static wheel (2): 8 + open (8 stamped), continuous scroll at variable speeds  
 Prism: 3-facet round, bidirectional rotation at variable speeds  
 Strobe Rate: 0 to 15 Hz  
 Control mode : DMX 512, master-slave , sound , Auto  
 Cooling : Efficient low noise fan cooling system  
 DMX connector : 3-pin XLR connectors IN/OUT



SKU: 684 3800156606845

Light

IP20



### 7x40w LED Wash Moving Head RGBW Mixing Color

Input: 110-240 V, 50/60 Hz  
 Power: 320W  
 Light source: 7\* 40W RGBW 4in1 mixing color LED wash moving head  
 Control mode:DMX512,Auto,Master-slave,Sound  
 Channel:17ch/12ch  
 2DMX Modes:STD(17ch)/HSI(12ch)  
 Function:the dyeing effect,strobe,zoom, the beam light effect  
 Pan:540°(16bit)Electric correction  
 Tilt:270°(16bit)Electric correction  
 Zoom range:9°~ 50°  
 Dimmer:0-100% dimmer  
 Size:240x300x405mm



SKU: 682

RGBW

IP20



### 300W LED Moving Head

LED source: 300W LED ; 8000K white LED,16\*10W RGBW  
 Working Time (hours): 50000  
 Fixed gobo wheel: 8 fixed gobos + open and bi-direction rotation  
 Color Temperature(CCT): 6000K (Daylight Alert)  
 Pan X: 540 degree, Tilt Y: 270 degree  
 Channel: 25ch/18ch Dimmer from 0-100%, Strobe  
 Beam angle: 3 degree 1 rotate gobo wheel (7 gobos + open) and 1 fixed  
 gobo wheel (8 gobos + open)  
 1 Color wheel: 7 main colors + open with rainbow effect 2 Prism disk,  
 Rotation prism,  
 Focus Temperature protect function powercon in & out, color screen,  
 Silent fan, good housing Pan/Tilt 0-255 speed controllable



SKU: 126

Light

IP20



### 12x10w LED Moving Head RGBW

Voltage: AC 110-240V 50/60 Hz  
 Power: 150W  
 LED QTY: 12\*10W RGBW 4in1 LED Moving Head Light  
 Lumens: 4500+, Lux @2m 40500+  
 Control: Master-Slave / Auto / Sound / DMX  
 Channel control: 15CH  
 Dimmer: 0-100%  
 Flash: 0-20Hz  
 Pan / Tilt: User -selectable Pan / Tilt ranges  
 Pan/ Tilt: 540 degrees / 270 degrees  
 Fine Turning: 8-16 bit  
 Color: Black / White  
 Size: 300x245x385mm



SKU: 688

RGBW

IP20



### 150W Beam LED Moving Head With Halo

SKU: 66304

Power: 150W  
 Light Source: High Power 1\*100W LED  
 Lighting Life: 50000 hours  
 Color temperature: 7000K-8000K  
 Beam Angle: 2.5 degrees  
 Display mode: LCD display, lamp temperature display, Chinese and English display, reversible display  
 Working mode: DMX512 mode, self-propelled mode, voice control mode and master-slave mode  
 DMX Channel Mode: 17 DMX  
 Pan: 540 Degree (16 Bit) Electrodynamic Correction  
 Tilt: 270 Degrees (16 Bits) Electro-dynamic Correction  
 Dimming Level: 0-100% Perfect Linear Dimming System  
 Product Weight : 12.5kg



### 280W 10R BEAM SPOT WASH MOVING HEAD

SKU: 66352

Lamp: 280W YODN LAMP (10R) beam spot wash moving  
 Channel mode: 24 /16 CH DMX512 Channel  
 Pan scan540°(16bit) Electric correction  
 Tilt scan270° (16bit) Electric correction  
 Color wheel: one color wheel, 14 kinds of color chips in one color wheel  
 Gobo: 14 static gobos, 9 rotation gobos;  
 Effect Wheel: Rotation eight prism, effect move , frost  
 Lens: optical system achanical focue beam angle 04°  
 Power Input: 100-240V50/60Hz  
 Power Dissipation400W  
 IP level: IP20  
 Net weight: 18kg



### 360 Beam Module RGB+240PCS White LED Strip Strobe Light

SKU: 66415

Voltage: 100-240V50/60Hz Power: 360W  
 Light source: 200 W white module LED  
 Peripheral auxiliary light: 30×0.5W RGB 3-in-1 leds  
 Beam Angle: 1.8°  
 Outlet lens diameter: 160mm  
 Color disk: 15 colors + white light, half color effect  
 Fixed Pattern Plate: 17 fine patterns (14 solid patterns +3 color patterns)  
 Prism: 1pc 16 prism, 1pc 24 prism, prism can be superimposed  
 Control panel: Built-in color LCD panel, 4 mechanical keys  
 Control channel: 19 DMX512 channels  
 Electronic dimming: 16-bit  
 X-axis operating angle: 540° Y-axis operating angle: 270°  
 Power socket: Power connector input/output  
 Signal input/output: three core cannon socket  
 Product size: 298×237×524mm



### 400W Led Zoom Moving Head

SKU: 66225

Voltage Rated voltage AC100V-240V  
 Rated frequency: 50/60HZ  
 Color temperature: 2800K-6000K  
 Service life: 50000 hours  
 Color: with 2 colors + white light  
 Dimming: 1-100% linear adjustment.  
 Display index: 90  
 Number of channels: 11CH  
 Control mode: master-slave, self-propelled, standard DMX512  
 Projection light range: X direction 540°, Y direction 250°,  
 Spot angle: 5-60°.  
 Number of motors: 4 ultra-quiet motors in total.  
 Protection class: IP20  
 Weight: 12Kg  
 Size: 33\*25\*52 cm



### 30W LED Logo Lightcontroller

SKU: 139

Voltage: AC110-240V, 50/60HZ  
 Consumption: 30W  
 Light source: One pcs LED White 30W  
 IP rating: IP20  
 Housing material: Black Iron shell  
 Mode of control: Auto, Remote  
 Movement: Rotated(Forward/backward), Stop  
 Net weight: 1.4kg



### LED 150W Spot Moving Head

SKU: 66222

LED source: 150W LED  
 Control mode: DMX512, Master/slave, Sound, Auto mode  
 DMX Channel: 16ch/20ch  
 Dimmer: from 0-100%, Strobe  
 Beam angle: 15 degree  
 1 rotate gobo wheel: (6 gobos + open) and 1 fixed gobo wheel  
 (6 gobos + water ripple + open) + 1 water ripple wheel  
 1 Color wheel: 7 main colors + open with rainbow effect  
 Prism: 3-facet prism, Rotation prism, Focus  
 Pan X: 540 degree,  
 Tilt Y: 270 degree  
 Pan/Tilt: 0-255 speed controllable

NEW PRODUCT



### 8x10w RGBW LED Lifting-Ball

SKU: 66445

Light source: 8x10W RGBW 4-in-1 beads, 96pcs RGB 3-in-1 beads  
 Power: 100W  
 Size: 20cmLift  
 Stroke: 3 metres  
 Control mode: DMX512/Artnet mode  
 Channel: 15/64 channels optional  
 Voltage: AC100V-240V/50-60HZ  
 Power: 150W  
 Size: 170\*130\*330mm

NEW PRODUCT



### Mirror Glass Ball

SKU: 191 20 cm  
 SKU: 193 30 cm  
 SKU: 194 60 cm  
 SKU: 195 70 cm  
 SKU: 196 80 cm  
 SKU: 197 120 cm

Application: concert, night club, theater, party,  
 wedding event, hotel, building  
 Material: Glass

NEW PRODUCT



### Mini Battery bubble machine remote control

SKU: 134

Voltage: AC110V-220V  
 Frequency: 50-60Hz  
 Power: AC/Batteries  
 Control mode: Auto, Remote control  
 Battery: 8x NO.5 crown cell  
 Tank Capacity: 0.6L  
 Bubble Output: 2400 bubble/min  
 Net weight: 1.5kg  
 Size: 240x230x215mm



### 300W Bubble Machine

SKU: 968

Voltage: AC 110/230V 50-60Hz ± 10%  
 Power: 200W  
 Bubble Oil Capacity: 2.5L  
 Bubble covered area: 200 m2  
 Control: Remote control (30) meters, manual  
 Product Dimensions: 415\*250\*415mm  
 Weight: 12 kg

NEW PRODUCT



### Moving Head Beam 46

SKU: 66439

Source: 4\*60W 4-IN-1 RGBW LEDs (6\*30)\*0.2W  
 3-IN-1 SMD RGB LEDs  
 Optics: 4PCS high efficiency lens 3.5°Projection angle  
 Movement TILT: 2 modes 60° Continuous movement 240°  
 Colors: Sophisticated 4 colors RGBW mixed  
 Linear CTO 2500-8000K  
 Strobe Effect: 1-25Hz shutter/strobe effect with variable speed  
 Dimming System: 0-100% Smooth linear LED dimming  
 Control System: 22/49/73 DMX channels USITT DMX-512  
 Display System: 1.44" TFT LCD display  
 Product Dimensions: 168(D)\*600(W)\*235.5(H)mm  
 Net Weight: 14.2kg

NEW PRODUCT



### Moving Head Beam 66

SKU: 66438

Source: 6\*60W 4-IN-1 RGBW LEDs (6\*30)\*0.2W 3-IN-1 SMD  
 RGB LEDs  
 Optics: 6 pcs high efficiency lens 3.5°Projection angle  
 Movement TILT: 2 modes 60° Continuous movement 240°  
 Colors: Sophisticated 4 colors RGBW mixed  
 Linear CTO 2500-8000K  
 Strobe Effect: 1-25Hz shutter/strobe effect  
 with variable speed  
 Dimming System: 0-100% Smooth linear LED dimming  
 Control System: 22/49/73 DMX channels USITT DMX-512  
 Display System: 1.44" TFT LCD display  
 Product Dimensions: 168(D)\*900(W)\*235.5(H)mm  
 Net Weight: 14.2kg

NEW PRODUCT



### Moving Head Beam 16

SKU: 66440

Power supply 100-240V 50/60Hz  
 Power: 80W  
 Lamp source: 1x60W 4-IN-1 RGBW LEDs 30x0.2W  
 3-IN-1 SMD RGB LEDs  
 Pan/Tilt: 76°  
 Dimmer: 0-100% Smooth linear LED dimming  
 Strobe: 1-25Hz shutter/strobe effect with variable speed  
 DMX channels: 23/28 DMX channels USITT DMX-512  
 Connections: 3-pin XLR DMX input/output  
 Display: 1.44" TFT LCD display  
 Operating modes: DMX512, master/slave, auto, sound  
 Net Weight: 4.6KG  
 Size: 224/224/262.5 mm



### 19x15W AURA LED Beam Moving Head Light Zoom RGBW

Input Voltage: AC90-260V 50/60Hz  
 Power Consumption: 300W  
 Zoom range: 8-28degree. Motor: 3pcs  
 Control mode: DMX512, master-slave, Sound, Auto  
 Channel: 14/25CHs  
 Beam (Primary LED array): provide the main output  
 Aura (Secondary background LED array): illuminate the front of the head, provide local diffuse light output and can be set to contrast with the beam output.  
 Beam: RGBW color control with color temperature control  
 Aura: RGB control ; Dimming: 0-100% smoothly dimmer  
 Strobe: 20t/s strobe effect with variable speed and pulse effects  
 540° PAN and 270° TILT movement  
 Size: 410x320x470mm



SKU: 693

NEW PRODUCT



### Moving Head Wash Strobe 712ES

Source Face 1: 7\*12W 4-IN-1 LEDs (RGBW) 60\*0.2W 3-IN-1 LEDs (RGB)  
 Source Face 2: 324\*0.5W 5730 LEDs (WW+CW) 9 Individual control rings  
 Optics Face 1: High efficiency optic system 25° Beam angle 35° Field angle  
 Optics Face 2: 120° Field angle High output  
 PAN: 2 modes 1. 360° Continuous movement 2. 540° (8/16 bit)  
 TILT: 2 modes 1. 360° Continuous movement 2. 270° (8/16 bit)  
 Color System Face 1: RGBW for main light, CTO, 2800K-5600K  
 Color System Face 2: Warm white+cold white, CTO, 2500K-4600K  
 Strobe Effect: 0-25Hz LED shutter/strobe effect with variable speed  
 Dimming System: 0-100% Smooth linear LED dimming  
 Control System: 9/18 DMX channels USITT DMX-512  
 Display System: 1.44" TFT LCD display  
 Product Dimensions: 139(D)\*297.9(W)\*376.7(H)mm

SKU: 66441

#### Power CON IN



SKU: 679 Female



SKU: 960 Male

#### XLR 3PIN -Male , Female - LH P005A



SKU: 678 Male



SKU: 963 Female

#### Power CON OUT



SKU: 961 Female



SKU: 962 Male

#### Hook


 SKU: 698 30mm  
 SKU: 699 50mm

#### Safety Rope



SKU: 697



### Spark Firework Machine

Voltage: AC 110-240V 50/60 HZ  
 Power: 400W  
 Control: DMX, remote control  
 Temperature: (-10/+50°C)  
 Height: 1-5 m  
 Spray direction: erect  
 DMX Channel: 2  
 NW: 9.5 kg



SKU: 902



### Stage Fog Waterproof Spark Machine

Power: 400W  
 Control: DMX, Remote control  
 Temperature (-10/+50°C)  
 Height: 1-4 meter  
 Spray direction fall  
 DMX Channel: 2  
 Machine Size: 200x200x180mm  
 NW: 6.5KG



SKU: 903



### LPG Fire Machine

Voltage: AC110-240V 50/60HZ  
 Power: 250W  
 Spary Height: 1-2 meter  
 Control: DMX512/Electric Control/remote control  
 DMX Channel: 1  
 Gas: LPG fire gas bottle  
 Machine Size: 420x165x200mm  
 NW: 7KG



SKU: 904



### Firebolt Fire Machine

Voltage: AC110-240V 50/60HZ  
 Power: 250W  
 Spary Height: 1-4 meter  
 Control: DMX512/remote control  
 DMX Channel: 4  
 Gas: LPG Gas bottle  
 Machine Size: 50x35x27CM  
 NW: 13KG



SKU: 905



### Water Low Fog Machine

Voltage: AC110-240V 50/60HZ  
 Power: 3000W  
 Cover area: 150-200 square meter  
 Control: DMX512/remote control/manual  
 DMX Channel: 2  
 Consumable materials: water+heavy fog liquid  
 Capacity of fog tank: 3L  
 Capacity of water tank: 15L  
 Machine Size: 714x400x316mm  
 GW: 52KG

SKU: 908



FOG



### Fog Machine 1000W

Voltage: AC110 - 240V 50/60HZ  
 Power: 1000W  
 Control: remote control/wire control  
 Re-heating time: 5 mins  
 Capacity of oil tanks 1 L  
 Size: 360x200x130mm  
 NW: 4KG

SKU: 912



FOG



### Dry Ice Machine 3000W

Voltage: AC110-240V 50/60HZ  
 Power: 3000W  
 Cover area: 100-200 square meter  
 Control: Manual  
 Consumable materials: Dry ice and water  
 Machine Size: 660x 370x580mm  
 NW: 16KG

SKU: 909



FOG



### Fog Machine 1500W

Voltage AC110 240V 50/60HZ  
 Power: 1500W  
 Control: remote control/DMX 512  
 Re-heating time: 5 mins  
 Capacity of oil tanks 3 L  
 Size 510x260x150mm  
 NW: 6KG

SKU: 913



FOG



### Fog Machine 900W

Voltage AC220V-240V 50/60HZ  
 Power: 900W  
 Control: remote control/wire control  
 Re-heating time 5 mins  
 Capacity of oil tanks 1.5L  
 Body color: black with hanging bracket  
 Machine Size: 36.5x18.5x17cm  
 NW 3KG

SKU: 910



FOG



### LED Fog Machine 1500W

Voltage: AC110-240V 50/60HZ  
 Power: 1520W  
 Control: remote control/wire control/ time  
 Re-heating time: 5 mins  
 Capacity of oil tanks: 2.5 L  
 Machine Size: 540x330x260mm  
 NW: 6KG

SKU: 914



Light



FOG



### 900W Fog Machine Remote

Voltage: AC220V-240V 50/60HZ  
 Power: 900W  
 Control: remote control/wire control  
 Re-heating time: 40s  
 Capacity of oil tanks: 1.5kl  
 Body color: black with hanging bracket  
 Machine Size: 530x270x320cm  
 Weight: 3KG

SKU: 910



FOG



### Cold Spark Machine 750W

Voltage: AC110-120,50/60Hz or AC220-230,50/60Hz  
 Maximum power: 650W  
 Preheating time: about 3-5min  
 Spray height: 1-5M adjustable  
 Control mode: DMX and wireless remote control  
 DMX Channel: 2 channels (customizable)  
 Temperature control mode: electronic constant temperature control  
 Heating method: electromagnetic heating  
 Net weight: 5.9KG  
 Product size: 205x205x265mm

SKU: 66412



### FOG MACHINE 3000W

Voltage: AC110-240V 50/60HZ  
 Power: 3000W  
 Control: DMX512/remote control  
 Re-heating time: 5 mins  
 Capacity of oil tanks: 5L  
 Size: 68x31x20CM  
 NW: 13KG

SKU: 915



FOG



### Twin-tube column machine

Operating voltage: 220-240 V, 50/60 Hz  
 Current limit insurance parameters: 15 A, 250 V  
 Total power: 3000 W  
 Warm-up time: about 8 minutes  
 Oil drum volume: 3.0L  
 Functions: Remote control, DMX-512, OLED control  
 Single blast time: 10 seconds  
 Maximum smoke output: approximately 78,000 cubic feet per minute  
 DMX channels: 11  
 Net weight: 20.5kg  
 Machine size: 562x417x278 mm

SKU: 66411



### Smoke machine 1500W

Use voltage: AC 220V, 50 HZ, 10A  
 Power: 1500W  
 Output: 40000cuft/min  
 Warm-up time: 4 Min  
 Oil drum volume: 3.0 L  
 Control method: remote control, DMX-512, OLED control  
 DMX channel value: 1  
 Net weight: 9.25 KG  
 Machine size: 525mmX350mmX233mm

SKU: 66408



FOG



### LED Air Column Smoke Machine

Using voltage: AC 220V, 50/60HZ, 10A  
 Power: 1500W  
 Output: 6000cuft/min  
 Preheating time: 4Min  
 Oil barrel volume: 3L  
 Control method: remote control, DMX-512, OLED screen control  
 LED color: RGB  
 LED type: Single Color  
 Total power of single lamp bead: 3W  
 Total number of lamp beads: 18 (6 red, green and blue)  
 DMX channel value: 8  
 Machine size: 460x320x235mm

SKU: 66410



### 600w Double Haze Machine

Voltage: AC 220V-240V 50/60Hz  
 Limiting insurance: 5A/250V  
 Power: 600W  
 Tank Volume: 1.7L  
 3 Fans angle: Adjustable  
 Output of the wind turbine regulation: Support  
 DMX-512: Support  
 Controller: LCD controller LCD controller  
 Preheating time: 0 second set-up time  
 Product size: LW H 460x320x300 mm

SKU: 66379



HAZE



### Haze machine 550W

SKU: 66409

Using Voltage AC 220V ,50/60HZ,7A  
 Power 550W  
 Output 6000cuft/min  
 Preheating time 1Min  
 Oil drum volume 0.8L  
 Control Remote control, network port, digital tube control  
 DMX channel: 2  
 Product weight 3.9KG  
 Machine size 332x160x258MM



HAZE



### Hanging Type Haze Machine

Voltage: AC 110~240V 50/60HZ  
 Power: 1000W  
 Warm-up time: 30 sec  
 Control: DMX512/ Remote control/Manual  
 Use consumables: Water based haze liquid  
 Capacity of oil tank: 2L  
 Size: 440x340x340mm

SKU: 917



HAZE



### Haze machine 1500W

SKU: 66407

Using voltage AC 220V ,50/60HZ  
 Fuse: 10A,250V  
 Power: 1500W  
 Preheating time 1Min  
 Maximum output fuel consumption: about 60 min/L  
 Screen type: OLED  
 Control method DMX-512 control remote control  
 DMX channel value: 2  
 Net weight: 12KG  
 Machine Size: 480\*343\*280mm  
 Function: keep the smoke coming



HAZE



### Oil Based Haze Machine

Voltage: AC 110-240V 50/60HZ  
 Power: 650W  
 Re-heating time: 0 second  
 Capacity of oil tank: 2.5L  
 Control: DMX-512, remote control, Manual  
 Machine size: 590x450x450mm  
 NW: 23KG

SKU: 918



HAZE



### Haze machine 2000W

SKU: 66406

Using voltage AC 220V ,50/60HZ,10A  
 Power 2000W  
 Output 16000cuft/min  
 Preheating time 1Min  
 Oil drum volume 6L  
 Control method remote control DMX-512 OLED control  
 DMX channel value: 2  
 Net weight: 18KG  
 Machine size: 517.5x260x220mm



HAZE





### Hand Confetti Machine

Voltage: AC110~240V 50/60HZ  
 Confetti capacity: 0.5kg  
 Control: Manual  
 Use consumables: Bullion paper/Color paper  
 Gas: Co2/N2  
 Weight: 7kg  
 Size: 970x300x210mm

SKU: 906



Confetti



### LED RGB 6x3W CO2 Gun

Spray Height: 6-7 meters

SKU: 66121



RGB



### LED Electric Confetti Machine

Voltage: AC110-240V 50/60HZ  
 Power: 1236W  
 Control: DMX 512, remote control  
 Height of ejection: 6-8M  
 DMX Channel: 7  
 Confetti capacity: 0.5KG  
 Size: 280x280x550mm  
 NW: 8KG

SKU: 907



Light



Confetti



### CO2 LED CONFETTI GUN

Spray distance: 6-8 meters  
 Control mode: manual (lithium-ion battery)  
 with lamp high- voltage  
 Tube length: 3 meters  
 Weight: 5 kg  
 Size: 760 x355 x270 mm, (3 meters tube)

SKU: 66413



### LED RGB CO2 Machine

LEDs: 12x3w RGB 3 in 1  
 Voltage: AC220/110V 50/60HZ  
 Power: 250W  
 Control: DMX512, remote control  
 DMX channels: 9  
 Column height: 8-10 m  
 Machine Size: 310x310x430 mm  
 Weight: 7.0KG

SKU: 664



RGB



IP20



### LED CO2 GUN

Control: manual control  
 Power: 35W  
 Color: 7 color  
 Jet distance: 6-7 m net  
 Weight: 4.5 kg  
 Size: 660x245 x350mm

SKU: 66414



## Power Supplies

### Metal 5V output



Watts	200W	300W
Input Voltage	220V	220V
Output Voltage	DC:5V	DC:5V
Current	40A	60A
Material	Metal	Metal
Dimension	190x80x30mm	190x80x30mm

SKU: 6191 200W 3800156661912

SKU: 6192 300W 3800156661929



DC 5V



IP20

## Accessories



## 4G Module

### for LED Multimedia Players

4G module can be used for all Optonica multimedia players. The 4G module, combined with external Sim card, enables you to access you're Optonica multi media player even when there is no Wi-Fi or LAN network available by using the 4G network. The compact module is plug and play, no further drivers are required.

- 4G module
- Access media player anywhere anytime
- Antenna included

SKU: 949



IP20



## Wireless DMX512 receiver transmitter system

Terminal: XLR, DMX512

Connection: 2.4Ghz wireless signal transmission

Encoding: 126 auto-synchronizing channels

Frequencies: 16 individual frequencies allowing operation of several transmitters simultaneously.

Range: Distance up to 700m

SKU: 66378



IP20

## Light Sensor

### for Brightness Adjustment

Accessory light probe with the following features:

- Monitor the brightness of the environment to achieve automatic adjustment of screen brightness.
- Connect the sending card and sending box, asynchronous card or multi-function card.
- Marking the 5 meter line, can be extended to 100 meters;
- In the outdoor use, three defense;
- No external power supply is required.



SKU: 951



IP20



**OPTONICA COMFORT PRODUCTS**



**WiFi E27 SMART CAMERA BULB**

Video resolution: HD  
Frame rate: 25fps  
View angle: 360 degrees (Horizontal)  
90 degrees (Vertical)  
Motion detection: About 5 meters  
Night vision: About 5 meters  
Max memory: Up to 128Gb (Not Include)  
App: JXLCAM

**SKU: 227**



E27



IP20



**WiFi SMART CAMERA BULB**

Video resolution: HD  
Frame rate: 25fps  
View angle: 360 degrees (Horizontal)  
90 degrees (Vertical)  
Motion detection: About 5 meters  
Night vision: About 5 meters  
Max memory: Up to 128Gb (Not Include)  
App: JXLCAM

**SKU: 244**





EU Plug Socket



IP20



Window cleaning  
**Robot**

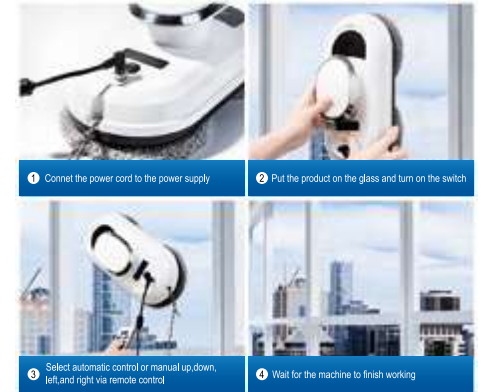

Cleaning speed 2 minutes / m2  
Power 80W  
Size 300x150x120mm  
Cleaning Modes 3 modes

SKU: 757



Window cleaning  
**Robot**



Cleaning speed 2 minutes / m2  
Power 80W  
Size 250x250x9.5mm  
Cleaning Modes 3 modes  
UPS 20min

SKU: 758



## Air Purifier & Humidifier

*Breathe Cleaner and Healthier Air*

**7 Stage Air Purification + Humidifier**  
**UV Lamp and IONIZER + WIFI**

CADR(PM2.5)	450m <sup>3</sup> /h
Power	85W
Area	~50 m <sup>2</sup>
Size	400x230x620mm
Purification	Pre-filter, Cold-catalyst, Formaldehyde removal filter (Honeycomb activated carbon filter Optional), Antibacterial filter, UV Sterilization, HEPA filter, Anion release.
SKU: 733	3800156607330



## Air Purifier

*Breathe Cleaner and Healthier Air*

**6 Stage Air Purification**  
**UV Lamp and IONIZER**

CADR(PM2.5)	150m <sup>3</sup> /h
Power	43W
Area	~30 m <sup>2</sup>
Size	330x180x505mm
Purification	Cold-catalyst, Formaldehyde removal filter (Honeycomb activated carbon filter Optional), Antibacterial filter, UV Sterilization, HEPA filter, Anion release.
SKU: 731	3800156607316



## Air Purifier & Humidifier

*Breathe Cleaner and Healthier Air*

**6 Stage Air Purification + Humidifier**  
**UV Lamp and IONIZER**

CADR(PM2.5)	300m <sup>3</sup> /h
Power	65W
Area	~38 m <sup>2</sup>
Size	360x195x565(mm)
Purification	Cold-catalyst, Formaldehyde removal filter (Honeycomb activated carbon filter Optional), Antibacterial filter, UV Sterilization, HEPA filter, Anion release.
SKU: 732	3800156607323



## Air Purifier

*Breathe Cleaner and Healthier Air*

**7 Stage Air Purification**  
**UV Lamp and IONIZER**

CADR(PM2.5)	320m <sup>3</sup> /h
Power	80W
Area	~40 m <sup>2</sup>
Size	370x195x605mm
Purification	Pre-filter, Cold-catalyst, Formaldehyde removal filter (Honeycomb activated carbon filter Optional), Antibacterial filter, UV Sterilization, HEPA filter, Anion release.
SKU: 734	3800156607347





LED FLOOR LIGHT  
**20W - Remote Control**



Watts	20W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	500lm	Dimension	130x1045 mm
Beam Angle	120°	Dimmable	YES

SKU: 237  
RGB+3000K

DIY modular assembly  
Multiple mode changes



LED FLOOR LIGHT  
**17W - Remote Control**



Watts	17W	CRI	Ra>80
Input Voltage	AC : 220-240V	IP Rating	IP20
Flux	400lm	Dimension	φ23.5x1462 mm
Beam Angle	120°	Dimmable	YES

SKU: 238  
RGB+3000K

DIY modular assembly  
Multiple mode changes



LED FLOOR LIGHT 5V  
**8W - Remote Control**



\* AC Adapter NOT Included

Watts	8W	CRI	Ra>80
Input Voltage	DC 5V 2A	IP Rating	IP20
Flux	220lm	Dimension	Φ30x1047 mm
Beam Angle	120°	Dimmable	YES

SKU: 239  
RGB+6000K

DIY modular assembly  
Multiple mode changes



POWER BANK - WATERPROOF  
**10000 mAh**



Battery: 10000MAh  
Rated Power: 37Wh/3.7V  
Input Micro :5V/2A  
Input Type-C: 5V/3A  
Output USB1/2 t: 5V/3A  
Output Type-C : 5V/3A  
Solar Panel:1.2W  
Size: 159\*78\*19.5mm  
Flashlight:2W LED

SKU: 7691 Black Body



POWER BANK - WATERPROOF  
**20000 mAh**



Battery: 20000MAh  
Rated Power: 74wh/3.7V  
Input Micro :5V/2A  
Input Type-C: 5V/3A  
Output USB1/2 t: 5V/3A  
Output Type-C : 5V/3A  
Solr Panel:1.2W  
Product Size: 167\*86\*33.5mm  
Flashlight:4w Led

SKU: 7692 Black Body



POWER BANK  
**10000 mAh**



Battery: 10000mAh  
Rated Power: 3.7V/37Wh  
Input Micro :1 DC 5V/2A | 9V/2A | 12V/1.5A  
Input Type-C :2 DC 5V/3A | 9V/2A | 12V/1.5A  
Output1 Type-C DC 5V/3A | 9V/2A | 12V/1.5A  
Output2 USB-A/B DC 4.5V/5A | 5V/4A | 9V/2A  
Product Size: 140\*69\*15.5mm

SKU: 7693 White Body  
SKU: 7694 Black Body

PD 22.5W



POWER BANK  
**20000 mAh**




Battery: 20000mAh  
Rated Power: 3.7V/74Wh  
Input Micro :1 DC 5V/2A | 9V/2A | 12V/1.5A  
Input Type-C :2 DC 5V/3A | 9V/2A | 12V/1.5A  
Output1 Type-C DC 5V/3A | 9V/2A | 12V/1.5A  
Output2 USB-A/B DC 4.5V/5A | 5V/4A | 9V/2A  
Product Size: 140\*69\*27.5mm

SKU: 7695 Black Body

PD 22.5W

**SMART CAMERA ROBOTIC VACUUM CLEANER**

SKU: 752




**BRUSHLESS VACUUM MOTOR+ROLLER BRUSH**

Clean thoroughly



1 Side Brush	2 Power Button	3 Camera	4 Power Switch
5 Glass Cover	6 Anti-drop Sensor	7 Charging Connect	8 Universal Wheel
9 Battery Cover	10 Wheel	11 Roller Brush	12 Mop

**Working Time Per Charge: 80-120mins**



**ANTI-DROP SENSORS**

Keep machine safety away from stairs

**ANTI-COLLISION SENSORS**

Effective protect machine and furniture



**EASY CLIMBING**

Moves over thresholds

**GO TO CLEAN UNDER THE FURNITURE**

Without omission



**AUTOMATIC CHARGING**

Back to charging dock automatically when battery is low


**BREAKPOINT RESUME OPERATION**

After charging, machine returns to breakpoint, continue to clean the remaining area.



**SMART GYRO ROBOTIC VACUUM CLEANER**

SKU: 753



**GYROSCOPE NAVIGATION  
MULTIPLE CLEANING MODES**

**AUTO CLEANING ROBOTIC VACUUM CLEANER**

SKU: 754



**ROADROVER WHEELS**

Climbing ability reach 2cm  
With cross-country wheel,  
Easy go crossing the obstacle



**10 PAIRS OF INFRARED ANTI-COLLISION SENSORS**



**AUTOMATIC DOCK AND CHARGING**



**STRONG SUCTION**

Up to 1000PA, no dust can hide from it



**VARIOUS GROUND TYPE APPLICATION**

Suitable for various floor type, low pile carpet, tile, wood floor, etc



**Portable Party Bluetooth Speaker  
2x8.0 inch**

Output Power: 20W RMS / 400W P.M.P.O  
Version BT : V5.0+EDR  
Function: BT/FM/USB/TF/AUX/MIC IN/TWS  
Built-in USB MP3 Player  
Remote Control  
Woofer : 8"\*2  
Channel : Stereo  
Signal to noise ratio : ≥80dB  
MIC input  
AUX 3.5mm Input  
USB charging : DC 5V  
Charging Time : 5-6 Hours  
Playtime : 2-4 Hours  
Battery capacity : 2400mAh  
Size : 250x245x615mm



SKU: 9551



**Portable Party Bluetooth Speaker  
2x8.0inch**

Output Power: 2x20W RMS / 800W P.M.P.O  
Version BT : V5.2+EDR  
Function: BT/FM/USB/TF/AUX/MIC IN/TWS  
Built-in USB MP3 Player  
Remote Control  
Woofer : 8"\*2  
Channel : Stereo  
Signal to noise ratio : ≥80dB  
2 pcs Wireless MIC  
AUX 3.5mm Input  
Charging : DC 9V  
Charging Time : 5-6 Hours  
Playtime : 2-4 Hours  
Battery capacity : 7.4V 3600mAh  
Size : 315x277x667mm



SKU: 9553



**Portable Party Bluetooth Speaker  
15 inch**

Output Power: 2x20W RMS / 800W P.M.P.O  
Version BT : V5.0+EDR  
Function: BT/FM/USB/TF/AUX/MIC IN/TWS  
Built-in USB MP3 Player  
Remote Control  
Woofer : 15"  
Channel : Stereo  
Signal to noise ratio : ≥80dB  
Wireless MIC  
AUX 3.5mm Input  
Charging : DC 9V  
Charging Time : 5-6 Hours  
Playtime : 2-4 Hours  
Battery capacity : 7.4V 3000mAh  
Size : 420x330x610mm



SKU: 9552



**Portable Party Bluetooth Speaker  
2x3.0inch**

Output Power: 2x6W RMS / 150W P.M.P.O  
Version BT : V5.0  
Function: BT/FM/USB/TWS  
Woofer : 3"\*2  
Signal to noise ratio : ≥80dB  
5 Lighting Modes  
Built-in USB MP3 Player  
USB charging : DC 5V  
Charging Time : 5-6 Hours  
Playtime : 2-4 Hours  
Battery capacity : 1200mAh  
Size : 128x128x280mm



SKU: 9554


**Charging Hub**  
**USB 5xTYPE-A and 1xTYPE-C**

Type-C Port Output:  
 5.0V DC, 3.0A  
 9.0V DC, 2A 12V DC, 1.5A, Max.18W

USB Output (A1):  
 5.0V DC, 3A, Max. 15W  
 9.0V DC, 2A, Max.18W  
 12V DC, 1.5A, Max 18W

USB Output (A2/A3/A4/A5):  
 5.0V DC, 2.4A, Max. 24W  
 All Ports Total - 42W Max



SKU: 7641


**Multi-Charger USB HUB**  
**USB 4xTYPE-A and 1xTYPE-C**

Type-C Port Output:  
 5.0V DC, 3.0A  
 9.0V DC, 2.2A 12V DC, 1.67A, Max.18W

USB Output (A1):  
 5.0V DC, 3A, Max. 15W  
 9.0V DC, 2A, Max.18W  
 12V DC, 1.5A, Max 18W


USB Output (A2/A3/A4):  
 5.0V DC, 2.4A, Max. 12W  
 All Ports Total - 32W Max



SKU: 7642


**Power Extension Cord**  
**4x Sockets and 2xUSB TYPE-A**

Power Supply : 220-240V  
 Current: Max. 16A  
 Schuko Sockets: 4  
 USB Ports: 2xUSB Type A  
 USB Charger Output: 5VDC/2.1A  
 Cable Length: 1.4m(3x1.5mm<sup>2</sup>)



SKU: 7643

**5 in 1 Type-C Hub**

1\*HDMI 4K60Hz  
 2\* USB 3.0  
 1\*LAN Ethernet port  
 1\*PD USB-C



SKU: 9521


**4 in 1 Type-C Hub**

1\*HDMI 4K30Hz  
 1\* USB 3.0  
 1\*LAN Ethernet port  
 1\*PD USB-C



SKU: 9522


**1000 Mbps Gigabit Lan to USB-A Adapter Aluminum**


SKU: 9523


**1000 Mbps Gigabit Lan to USB-C Adapter Aluminum**


SKU: 9524


**USB 3.0 Type-A to 4\*USB3.0 HUB Plastic**

4\* USB 3.0



SKU: 9525


**USB 3.0 Type-C to 4\*USB3.0 HUB Plastic**

4\* USB 3.0



SKU: 9526





**3 in 1 Wireless Charging Station**  
Apple iPhone/AirPods/iWatch  
Samsung Phone/Buds/Watch



Wireless Charging IP20

3-in-1 Wireless Charging

Compact Design

Phone Stand

SKU: 9500 For iPhone

SKU: 9501 For Samsung

**3 in 1 Multifunction Desk Lamp**  
Wireless Charging



Wireless Charging IP20

3-in-1 Wireless Charging

Phone Stand

SKU: 9512 Black Body

**6 in 1 Multi-function Charging Station**  
Match multiple devices



Wireless Charging IP20

for phone

for iWatch

for AirPods

SKU: 9502 Black Body

SKU: 9503 White Body

**3 USB Quick Charger**  
36W Max Power

**PD + 3USB**   
IP20



<sup>3</sup>  
quick charge

3 USB ports

PD 20W

smart chip

SKU: 9510 Black Body

SKU: 9511 White Body

**Wireless Charger Pad**  
Qi Standard



Compact Design Wireless Charging IP20

- Universal input: 5.0V=2A      Universal output: 5.0V 1A
- Fast charge input: 9.0V 2A      Fast charge output: 9.0V 1.2A

SKU: 9508 Black Body

SKU: 9509 White Body

**Car Wireless Charger Stand**  
36W Max Power

Wireless Charging IP20



10W  
Wireless charging


Steady

Large area induction coil

SKU: 9506 Gold Body

SKU: 9507 Silver Body

**Wireless Charging Clock supports iOS and Android**



SKU: 9514 Clock

**Solar Portable Bluetooth Speaker + Lamp**  
Solar Panel Power: 5V/3.5W



- SOS Emergency Light
- Power Bank Function
- USB Ports

Battery  
**3.7V 6Ah**

SKU: 223  
CCT  
6000K 4500K 3000K



**Bluetooth FM Transmitter Car Charger With MP3 Player**

SKU: 9504 FM Transmitter



**3 in 1 Magnetic USB Cable**  
Type-C, Micro USB, For Apple



SKU: 9516 Charging Cable

**Solar Portable Bluetooth Speaker + Lamp**  
Solar Panel Power: 5V/3.5W



- SOS Emergency Light
- Power Bank Function
- USB Ports

Battery  
**3.7V 6Ah**


SKU: 224  
CCT  
6000K 4500K 3000K



**CCT Selfie Ring Light**  
10W 5V USB - Dimmable



Watts 10W  
Input Voltage 5V USB  
Flux 800lm  
Beam Angle 120°  
Dimmable YES



SKU: 9515 Selfie Ring Light



**Solar Portable Bluetooth Speaker + Lamp**  
Solar Panel Power: 5V/3.5W




- SOS Emergency Light
- Power Bank Function
- USB Ports

Battery  
**3.7V 6Ah**

SKU: 228  
CCT  
6000K 4500K 3000K



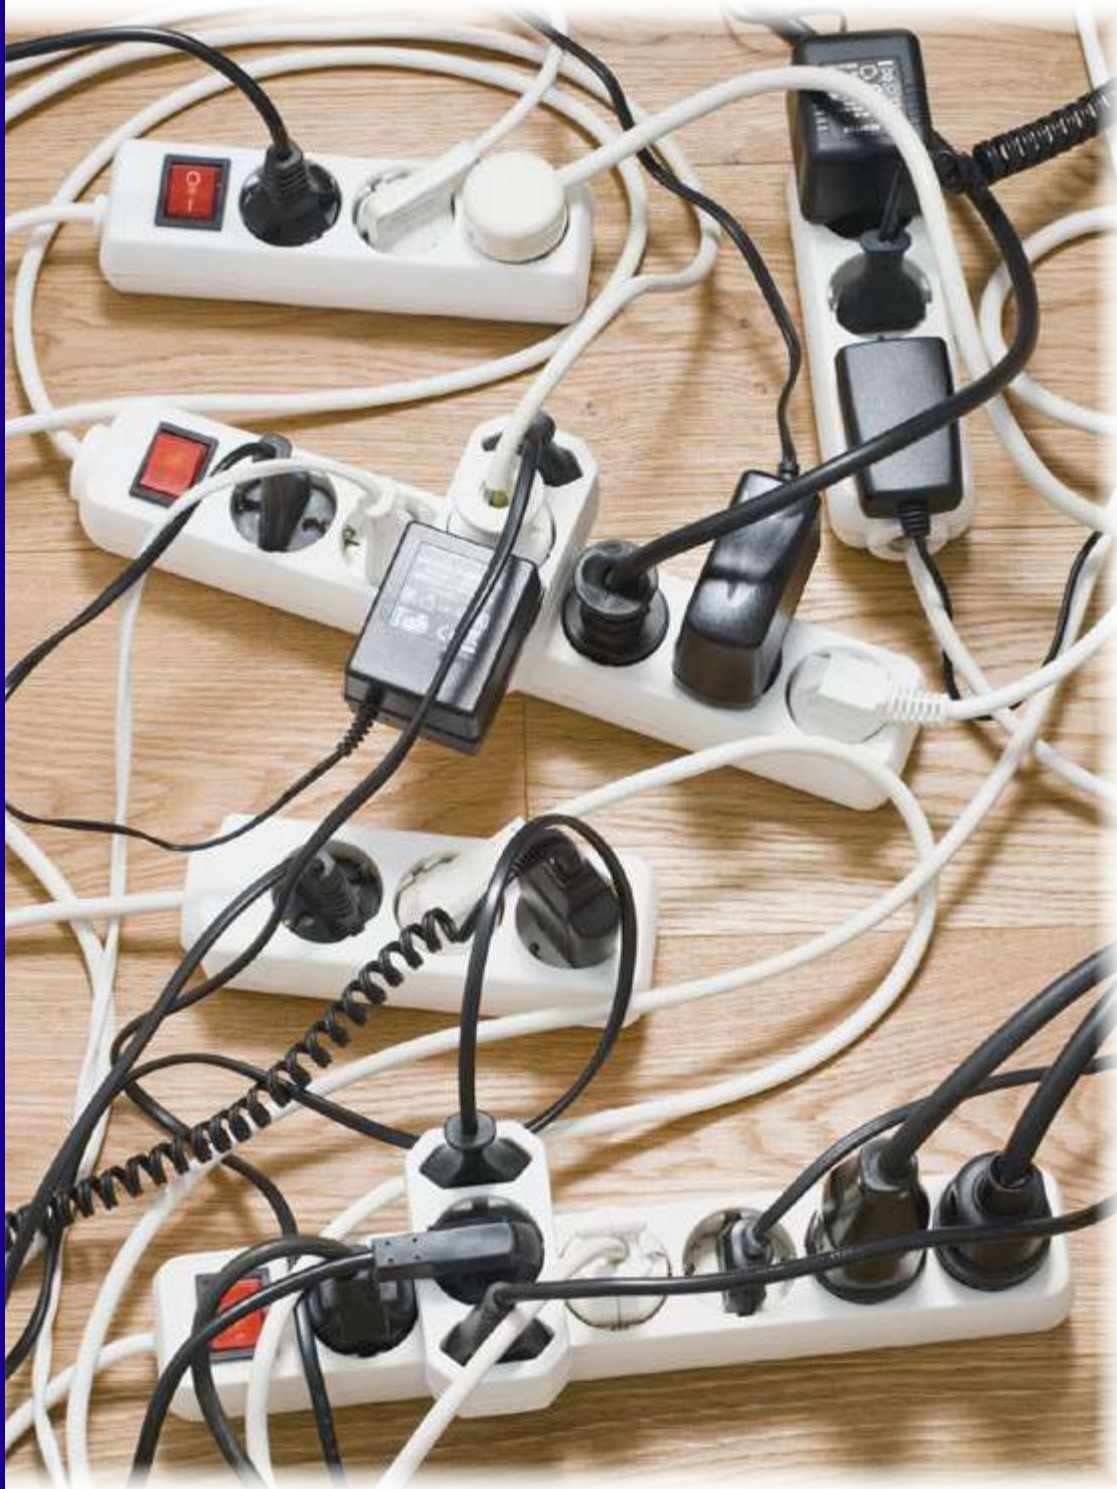

Travel Adaptor - UK to EU

**Cooper**

Input Voltage	AC : 250V	IP Rating	IP20
Working Current	10A Max	Dimension	35x35x68 mm
Material	Cooper	Body Color	White

SKU: 9517



IP20



Travel Adaptor - UK to EU

**Iron**

Input Voltage	AC : 250V	IP Rating	IP20
Working Current	10A Max	Dimension	35x35x68 mm
Material	Iron	Body Color	White

SKU: 9518



IP20



CABLE FOR POWER SUPPLY  
0.75mm 2PIN

SKU: 6040



100cm



CABLE FOR POWER SUPPLY  
0.75mm 3PIN

SKU: 6041



100cm



CABLE FOR POWER SUPPLY  
0.75mm 3PIN

SKU: 6042



100cm



SKU: 7601 - 3 Sockets 1.5m 16A  
SKU: 7602 - 3 Sockets 3m 16A



EU Plug Switch

SKU: 7607 - 3 Sockets 1.5m 16A  
SKU: 7608 - 3 Sockets 3m 16A



IP44 Switch

SKU: 7613 - 4 Sockets 5m 16A



IP44 Switch

SKU: 7614 - 6 Sockets 10m 16A



SKU: 7603 - 4 Sockets 1.5m 16A  
SKU: 7604 - 4 Sockets 3m 16A



EU Plug Switch

SKU: 7609 - 4 Sockets 1.5m 16A  
SKU: 7610 - 4 Sockets 3m 16A



2xUSB Switch

SKU: 7615 - 3 Sockets 1.5m 16A



2xUSB Switch

SKU: 7616 - 5 Sockets 1.5m 16A



SKU: 7605 - 5 Sockets 1.5m 16A  
SKU: 7606 - 5 Sockets 3m 16A



EU Plug Switch

SKU: 7611 - 5 Sockets 1.5m 16A  
SKU: 7612 - 5 Sockets 3m 16A



2xUSB Switch

SKU: 7617 - 3 Sockets 3m 16A



2xUSB Switch

SKU: 7618 - 5 Sockets 3m 16A

Reel: 1000W(4.35A)  
Unreel: 3200W(13.91A)



SKU: 7623 - 4 Sockets 25m 16A

Reel: 1100W(4.8A)  
Unreel: 3200W(13.91A)



SKU: 7624 - 4 Sockets 10m 16A



IP44

SKU: 7631 - Schuko Male 16A



IP44

SKU: 7632 - Schuko Female 16A



IP44

SKU: 7625 - 2 Sockets 5m 16A



IP44 Timer

SKU: 7626 - 2 Sockets 5m 16A



SKU: 7633 - Schuko Male 16A



SKU: 7634 - Schuko Female 16A



SKU: 7635 - 2 Sockets Adapter 16A



IP44

SKU: 7637 - 2 Sockets Adapter 16A



SKU: 7621 - 1 Sockets 10m 16A  
SKU: 7622 - 1 Sockets 20m 16A



SKU: 7636 -3 Sockets 16A





SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.
2490	197	2684	191	2802	155	2906	146	2980	134	3290	208	4491	239	4704	218	4909	228	5019	313	5085	75	5166	247
2491	197	2686	191	2803	155	2907	147	2981	134	3291	208	4492	239	4706	218	4911	224	5020	313	5086	75	5170	77
2492	197	2687	191	2804	155	2908	147	2982	134	3292	208	4496	229	4710	218	4913	224	5021	313	5090	457	5171	77
2493	197	2688	191	2805	155	2909	146	2983	134	3293	209	4511	260	4711	218	4913	224	5022	313	5091	457	5172	77
2494	197	2689	191	2806	155	2910	146	2984	134	3294	209	4512	260	4720	220	4921	224	5023	313	5092	457	5175	245
2495	197	2701	176	2807	154	2911	147	2985	134	3295	209	4513	260	4721	220	4922	224	5024	313	5093	457	5180	151
2496	197	2702	176	2808	154	2912	147	2986	134	3296	205	4514	260	4731	220	4923	224	5025	313	5094	457	5181	151
2497	197	2703	176	2809	154	2913	148	2987	135	3297	205	4515	260	4732	220	4931	231	5026	313	5095	457	5182	187
2498	197	2704	176	2810	154	2914	148	2988	135	3298	205	4516	260	4733	220	4932	231	5027	305	5096	457	5183	246
2499	197	2705	176	2811	154	2915	148	2989	135	3299	205	4521	260	4734	220	4933	231	5028	305	5097	77	5184	245
2501	144	2706	176	2812	154	2916	148	2990	135	4311	223	4522	260	4735	220	4934	231	5029	305	5098	77	5185	245
2502	144	2707	176	2813	154	2917	148	2991	135	4312	223	4523	260	4736	220	4935	231	5030	305	5099	77	5188	187
2503	145	2708	176	2814	154	2918	148	2992	135	4313	219	4524	260	4740	218	4936	231	5030	305	5101	246	5190	245
2504	145	2711	177	2815	154	2919	148	2993	135	4314	219	4525	260	4761	219	4937	231	5036	305	5102	246	5191	245
2505	144	2712	177	2816	154	2920	148	2994	135	4315	223	4526	260	4762	219	4938	231	5036	305	5103	246	5192	245
2506	145	2713	177	2817	154	2921	149	2995	135	4316	223	4531	261	4763	219	4939	231	5037	305	5104	245	5193	245
2535	132	2714	184	2818	154	2921	359	2996	135	4321	240	4532	261	4800	221	4940	232	5037	305	5105	245	5197	187
2536	132	2715	184	2840	158	2922	149	2997	135	4322	240	4533	261	4801	221	4941	229	5038	305	5106	245	5198	187
2537	132	2716	184	2841	158	2923	149	2998	135	4323	240	4534	261	4802	221	4941	252	5039	305	5107	246	5199	187
2538	132	2717	177	2842	158	2924	149	3201	210	4324	242	4535	261	4807	221	4942	229	5040	305	5108	245	5201	328
2539	133	2718	177	2843	158	2925	149	3202	210	4325	242	4551	253	4808	221	4942	252	5041	215	5109	246	5202	328
2540	133	2726	178	2844	158	2926	149	3203	210	4326	242	4552	253	4809	222	4943	229	5042	215	5110	246	5203	328
2541	133	2727	178	2845	158	2927	149	3204	210	4327	242	4553	253	4810	222	4943	252	5043	215	5111	247	5203	328
2542	133	2728	178	2846	158	2928	149	3205	210	4328	241	4554	253	4811	222	4944	229	5044	214	5112	247	5204	328
2581	202	2729	183	2847	158	2929	150	3206	210	4329	241	4555	253	4823	221	4944	252	5045	214	5113	245	5205	328
2582	202	2730	183	2848	158	2930	150	3207	210	4330	241	4555	253	4825	221	4945	229	5046	214	5114	248	5207	328
2583	202	2731	184	2849	159	2931	150	3212	210	4403	238	4561	261	4827	221	4945	252	5047	307	5115	248	5208	328
2584	202	2732	184	2850	159	2941	142	3222	210	4404	238	4562	261	4839	222	4946	252	5051	456	5116	248	5209	328
2585	202	2733	184	2851	159	2942	142	3223	210	4405	238	4563	261	4840	222	4947	230	5052	456	5117	248	5211	328
2586	204	2734	178	2852	159	2943	142	3224	210	4406	238	4564	260	4841	222	4948	230	5053	456	5118	248	5212	328
2587	204	2736	178	2853	159	2944	143	3225	210	4421	227	4571	256	4842	222	4949	230	5054	456	5119	248	5213	328
2590	198	2737	178	2854	159	2945	143	3241	211	4422	227	4572	256	4844	222	4950	230	5055	456	5120	248	5214	328
2591	194	2739	178	2855	159	2946	143	3242	211	4423	227	4573	256	4850	225	4951	258	5056	457	5121	248	5215	328
2591	198	2740	174	2856	159	2952	194	3243	211	4424	235	4579	257	4851	225	4952	258	5057	457	5122	248	5216	325
2592	198	2741	174	2857	159	2953	194	3254	211	4425	235	4580	255	4852	225	4953	258	5058	457	5123	248	5217	325
2593	198	2744	177	2858	160	2954	194	3260	213	4426	235	4581	255	4853	225	4954	258	5060	305	5124	248	5221	329
2594	199	2746	182	2859	160	2955	194	3261	213	4431	227	4582	255	4854	225	4955	258	5061	305	5125	248	5222	329
2595	199	2770	174	2860	161	2956	194	3262	213	4432	227	4583	255	4855	225	4956	258	5062	305	5128	249	5223	329
2596	199	2771	174	2861	161	2957	194	3263	213	4433	227	4584	255	4856	225	4957	256	5063	305	5130	249	5224	329
2597	199	2772	182	2870	156	2958	194	3264	208	4441	234	4585	255	4857	225	4958	256	5063	305	5132	249	5225	329
2601	192	2773	182	2871	156	2959	194	3265	208	4451	227	4586	255	4858	225	4959	256	5064	305	5133	249	5226	329
2604	192	2776	174	2872	156	2960	194	3266	208	4452	227	4587	255	4861	223	4960	228	5064	305	5134	249	5227	329
2608	192	2777	174	2873	156	2961	194	3267	209	4453	227	4588	255	4862	223	4961	228	5065	305	5141	248	5228	329
2610	192	2780	182	2874	156	2962	194	3268	209	4454	235	4589	255	4865	232	5001	247	5065	305	5142	248	5229	329
2613	192	2784	183	2875	156	2963	195	3269	209	4455	235	4590	254	4866	232	5003	203	5066	305	5143	244	5230	329
2614	193	2785	183	2876	156	2964	195	3270	212	4456	235	4591	254	4867	232	5004	203	5067	305	5144	244	5241	324
2617	193	2786	183	2877	156	2965	195	3271	212	4461	234	4592	254	4871	226	5005	203	5068	305	5145	244	5242	324
2630	193	2787	183	2878	156	2966	195	3272	212	4462	234	4593	254	4872	226	5006	203	5070	76	5150	246	5243	324
2631	193	2788	180	2879	157	2967	195	3273	212	4463	234	4594	254	4872	226	5007	313	5071	76	5151	237	5244	324
2632	193	2789	180	2880	157	2968	195	3274	212	4471	234	4595	254	4873	226	5008	313	5072	76	5152	237	5246	324
2642	193	2790	180	2881	157	2969	195	3275	212	4480	236	4596	254	4875	226	5009	313	5073	76	5153	312	5247	324
2669	190	2791	181	2883	157	2971	195	3276	212	4481	237	4597	254	4876	226	5010	313	5074	76	5154	312	5248	324
2672	190	2792	181	2884	157	2972	195	3277	212	4482	237	4598	254	4877	226	5011	313	5075	76	5155	312	5249	324
2673	190	2793	181	2887	157	2973	195	3278	212	4483	236	4599	254	4878	226	5012	313	5076	77	5156	312	5250	324
2674	190	2795	181	2889	152	2974	195	3284	208	4484	236	4611	259	4879	226	5013	313	5077	77	5157	312	5251	324
2675	190	2796	181	2901	146	2975	134	3285	208	4485	235	4612	259	4904	224	5014	313	5078	77	5158	312	5252	324
2676	190	2797	181	2902	146	2976	134	3286	208	4486	235	4613	259	4905	224	5015	313	5081	75	5159	312	5253	324
2677	190	2798	181	29																			




SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.				
5257	324	5342	316	5416	320	5502	105	5704	350	5781	353	5992	339	6211	269	6321	295	6387	284	6610	237	6694	122
5258	324	5343	316	5417	320	5503	105	5705	350	5865	356	5993	339	6212	269	6322	295	6388	287	6611	237	6695	122
5259	324	5344	318	5418	320	5504	105	5706	350	5866	356	6019	186	6213	269	6326	281	6389	291	6612	237	6697	122
5260	324	5345	318	5419	320	5505	105	5707	350	5871	356	6021	186	6214	269	6328	281	6390	289	6612	371	6698	122
5261	326	5346	318	5420	315	5506	105	5708	350	5873	356	6022	186	6221	269	6329	282	6391	289	6613	237	6701	118
5262	326	5347	317	5421	315	5507	105	5709	350	5876	356	6025	203	6222	269	6330	291	6392	289	6614	237	6702	118
5263	327	5348	317	5422	315	5508	105	5710	350	5879	356	6026	203	6223	269	6331	239	6393	290	6615	237	6703	119
5264	327	5349	317	5423	315	5509	105	5711	350	5880	357	6027	203	6224	269	6332	239	6394	290	6616	237	6704	119
5265	326	5350	315	5424	319	5511	109	5712	350	5883	357	6028	185	6231	270	6334	292	6395	288	6617	237	6705	118
5266	326	5351	315	5425	319	5512	109	5713	350	5886	357	6029	185	6232	270	6335	292	6396	289	6618	237	6706	118
5267	326	5352	315	5426	319	5513	109	5714	350	5888	357	6030	185	6233	270	6336	294	6397	290	6619	237	6707	119
5268	326	5353	315	5427	319	5514	109	5715	350	5893	357	6031	185	6241	270	6337	294	6398	300	6620	237	6708	119
5269	326	5354	321	5428	319	5515	109	5721	351	5900	358	6032	185	6242	270	6338	294	6399	300	6621	237	6709	118
5270	326	5355	321	5430	337	5516	109	5722	351	5901	358	6035	186	6243	270	6339	294	6408	538	6622	230	6710	118
5271	327	5356	321	5431	337	5517	109	5723	351	5903	358	6036	186	6251	271	6340	292	6501	370	6623	230	6711	119
5272	327	5357	321	5432	337	5518	109	5724	351	5905	358	6037	186	6252	271	6341	292	6502	370	6624	230	6712	119
5273	327	5358	315	5433	337	5519	109	5725	351	5907	358	6038	186	6253	271	6342	293	6503	370	6631	259	6721	123
5277	369	5360	315	5450	315	5538	105	5726	351	5908	358	6039	186	6254	271	6343	293	6504	370	6632	259	6722	123
5291	338	5361	315	5451	315	5539	105	5727	351	5911	358	6040	563	6261	271	6345	292	6505	370	6633	259	6723	123
5292	338	5362	315	5452	315	5540	105	5728	351	5914	358	6041	563	6262	271	6346	292	6506	370	6634	255	6724	123
5293	338	5363	315	5453	315	5544	108	5729	351	5915	359	6042	563	6263	271	6347	292	6507	370	6635	255	6725	123
5294	338	5364	315	5455	341	5545	108	5730	351	5916	359	6043	174	6264	271	6347	292	6508	370	6636	255	6726	123
5295	338	5365	315	5456	341	5546	108	5731	351	5918	359	6044	174	6265	265	6348	284	6509	371	6637	255	6731	114
5296	338	5366	315	5457	341	5549	108	5732	351	5919	359	6101	272	6266	265	6349	284	6510	371	6637	259	6732	114
5297	338	5367	315	5458	341	5588	104	5733	351	5920	359	6102	272	6267	265	6350	285	6511	371	6638	255	6733	115
5298	338	5368	315	5459	341	5589	104	5734	351	5922	359	6103	272	6268	265	6351	300	6541	232	6639	255	6734	115
5303	362	5369	315	5460	340	5590	104	5735	351	5923	359	6104	274	6271	266	6352	295	6542	232	6640	255	6735	114
5304	362	5378	321	5461	340	5591	104	5736	368	5925	359	6105	274	6272	266	6353	293	6543	258	6641	371	6736	114
5305	362	5379	321	5462	340	5592	104	5737	368	5927	359	6106	274	6273	266	6354	299	6544	258	6642	371	6737	115
5306	362	5380	304	5463	340	5593	104	5738	368	5928	359	6109	274	6275	264	6355	298	6545	258	6643	371	6738	115
5311	320	5381	304	5464	365	5594	104	5739	368	5930	360	6110	273	6276	264	6356	299	6546	258	6644	371	6739	114
5312	320	5382	304	5468	336	5595	104	5743	354	5931	360	6111	273	6277	264	6357	301	6547	258	6645	371	6740	114
5313	320	5383	306	5470	304	5596	104	5744	354	5932	360	6112	273	6278	264	6358	301	6548	258	6646	371	6741	115
5314	320	5384	306	5471	304	5597	104	5751	366	5934	360	6113	273	6279	264	6359	285	6549	233	6647	370	6742	115
5315	321	5385	306	5472	304	5598	104	5752	366	5935	360	6119	272	6280	264	6360	285	6550	233	6648	370	6745	120
5316	321	5386	307	5473	336	5599	104	5753	366	5937	360	6120	272	6281	266	6361	301	6551	233	6650	114	6746	120
5317	322	5387	307	5474	336	5601	111	5754	367	5938	360	6121	274	6282	266	6362	301	6552	233	6651	115	6747	120
5318	322	5388	307	5475	336	5602	111	5755	367	5939	360	6131	276	6283	266	6363	299	6552	233	6652	114	6748	120
5319	322	5389	312	5478	308	5603	111	5756	367	5942	361	6132	276	6284	267	6364	296	6553	233	6653	115	6749	120
5320	322	5390	312	5479	308	5604	111	5760	352	5943	361	6133	276	6285	267	6365	298	6554	233	6654	114	6750	120
5321	309	5391	316	5480	330	5605	111	5761	352	5945	361	6134	276	6291	267	6366	296	6555	233	6655	115	7131	404
5322	309	5392	316	5481	330	5606	111	5762	352	5946	361	6135	276	6292	267	6367	296	6556	233	6671	121	7132	404
5323	309	5393	316	5482	330	5607	111	5763	352	5948	361	6151	275	6293	267	6368	285	6556	233	6672	121	7133	404
5324	309	5394	316	5483	330	5608	111	5764	352	5949	361	6152	275	6294	267	6369	297	6557	233	6673	121	7134	404
5325	309	5395	318	5484	330	5609	111	5765	352	5950	361	6153	275	6302	280	6370	298	6558	233	6674	121	7135	404
5326	309	5396	318	5485	330	5610	110	5766	352	5952	363	6154	275	6303	280	6371	297	6559	233	6675	121	7136	404
5327	309	5397	318	5486	330	5611	110	5767	352	5953	363	6155	275	6304	280	6372	297	6560	233	6676	121	7201	128
5328	309	5398	317	5487	330	5614	110	5768	352	5954	363	6161	277	6305	281	6374	286	6561	233	6677	121	7202	128
5329	309	5399	317	5488	330	5615	110	5769	352	5955	363	6162	277	6306	280	6375	286	6563	233	6678	121	7203	127
5330	309	5400	317	5489	330	5617	110	5770	352	5957	363	6163	277	6307	280	6376	286	6564	233	6679	121	7204	127
5331	309	5401	365	5490	333	5618	110	5771	353	5958	363	6164	277	6308	282	6377	286	6565	233	6680	121	7205	127
5332	309	5402	365	5491	333	5626	113	5772	353	5959	363	6165	277	6310	281	6378	291	6581	257	6681	121	7206	127
5334	323	5403	364	5492	333	5627	113	5773	353	5960	363	6191	544	6311	281	6379	287	6582	257	6682	354	7207	128
5335	323	5404	364	5493	333	5628	113	5774	353	5961	363	6192	544	6312	282	6380	288	6583	257	6683	354	7208	129
5336	323	5405	364	5494	332	5629	113	5775	353	5962	363	6201	268	6314	282	6381	287	6601	254	6684	354	7209	129
5337	323	5411	315	5495	332	5630	113	5776	353	5981	355	6202	268	6315	282	6382	287	6602	254	6685	354	7210	129
5338	323	5412	315	5496	332	5631	113	5777	353	5982	355	6203	268	6317	283	6383	288	6603	254	6686	370	7211	129
5339	323	5413	315																				





SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.	SKU:	Page No.
15126	244	15838	344	15898	348	66230	515	5611-M	112
15127	244	15839	344	16302	297	66302	484	5612-M	112
15128	244	15840	344	16701	116	66304	530	5624-M	112
15129	244	15841	344	16702	116	66305	517		
15130	243	15842	344	16703	117	66351	511		
15131	243	15843	344	16704	117	66352	531		
15401	311	15844	344	16705	116	66362	527		
15402	311	15845	344	16706	116	66364	472		
15511	107	15846	344	16707	117	66366	484		
15512	107	15847	344	16708	117	66367	482		
15513	107	15848	345	16709	116	66368	482		
15514	107	15849	345	16710	116	66371	516		
15515	107	15850	345	16711	117	66372	521		
15516	107	15851	345	16712	177	66373	521		
15517	107	15852	345	66018	474	66374	520		
15518	107	15853	345	66019	474	66375	521		
15519	107	15854	345	66020	475	66376	520		
15541	106	15855	345	66021	484	66377	520		
15542	106	15856	345	66022	472	66378	545		
15544	106	15857	345	66023	485	66379	540		
15545	106	15858	345	66025	478	66400	516		
15547	106	15859	346	66026	478	66401	495		
15548	106	15860	346	66027	478	66402	495		
15801	342	15861	346	66028	478	66403	495		
15802	342	15862	346	66102	516	66404	494		
15803	342	15863	346	66103	510	66405	494		
15804	342	15864	346	66104	517	66406	541		
15805	342	15865	346	66106	510	66407	541		
15806	342	15866	346	66107	509	66409	541		
15807	342	15867	346	66108	527	66410	539		
15808	342	15868	346	66109	509	66411	539		
15809	342	15869	346	66110	509	66412	539		
15810	342	15870	346	66120	517	66413	543		
15811	342	15871	346	66121	543	66414	543		
15812	342	15872	346	66122	514	66415	530		
15813	342	15873	346	66123	514	66416	511		
15814	342	15874	347	66124	515	66417	511		
15815	342	15875	347	66125	515	66420	483		
15816	343	15876	347	66126	514	66421	483		
15817	343	15877	347	66127	505	66436	526		
15818	343	15878	347	66173	480	66437	526		
15819	343	15879	347	66201	485	66438	533		
15820	343	15880	347	66202	485	66439	533		
15821	343	15881	347	66203	485	66440	533		
15822	343	15882	347	66206	482	66441	534		
15823	343	15883	347	66207	482	66442	508		
15824	343	15884	347	66208	482	66443	508		
15825	343	15885	347	66208	526	66444	508		
15826	343	15886	347	66209	477	66445	532		
15827	343	15887	347	66211	488	66447	498		
15828	343	15888	347	66212	488	66488	487		
15829	343	15889	348	66213	499	66489	498		
15830	343	15890	348	66214	496	66490	498		
15831	349	15891	348	66215	489	66491	494		
15832	349	15892	348	66216	489	66492	499		
15833	349	15893	348	66217	496	66494	496		
15834	349	15894	348	66218	489	66496	485		
15835	349	15895	348	66222	531	66502	488		
15836	349	15896	348	66225	531	66503	499		
15837	344	15897	348	66226	510				

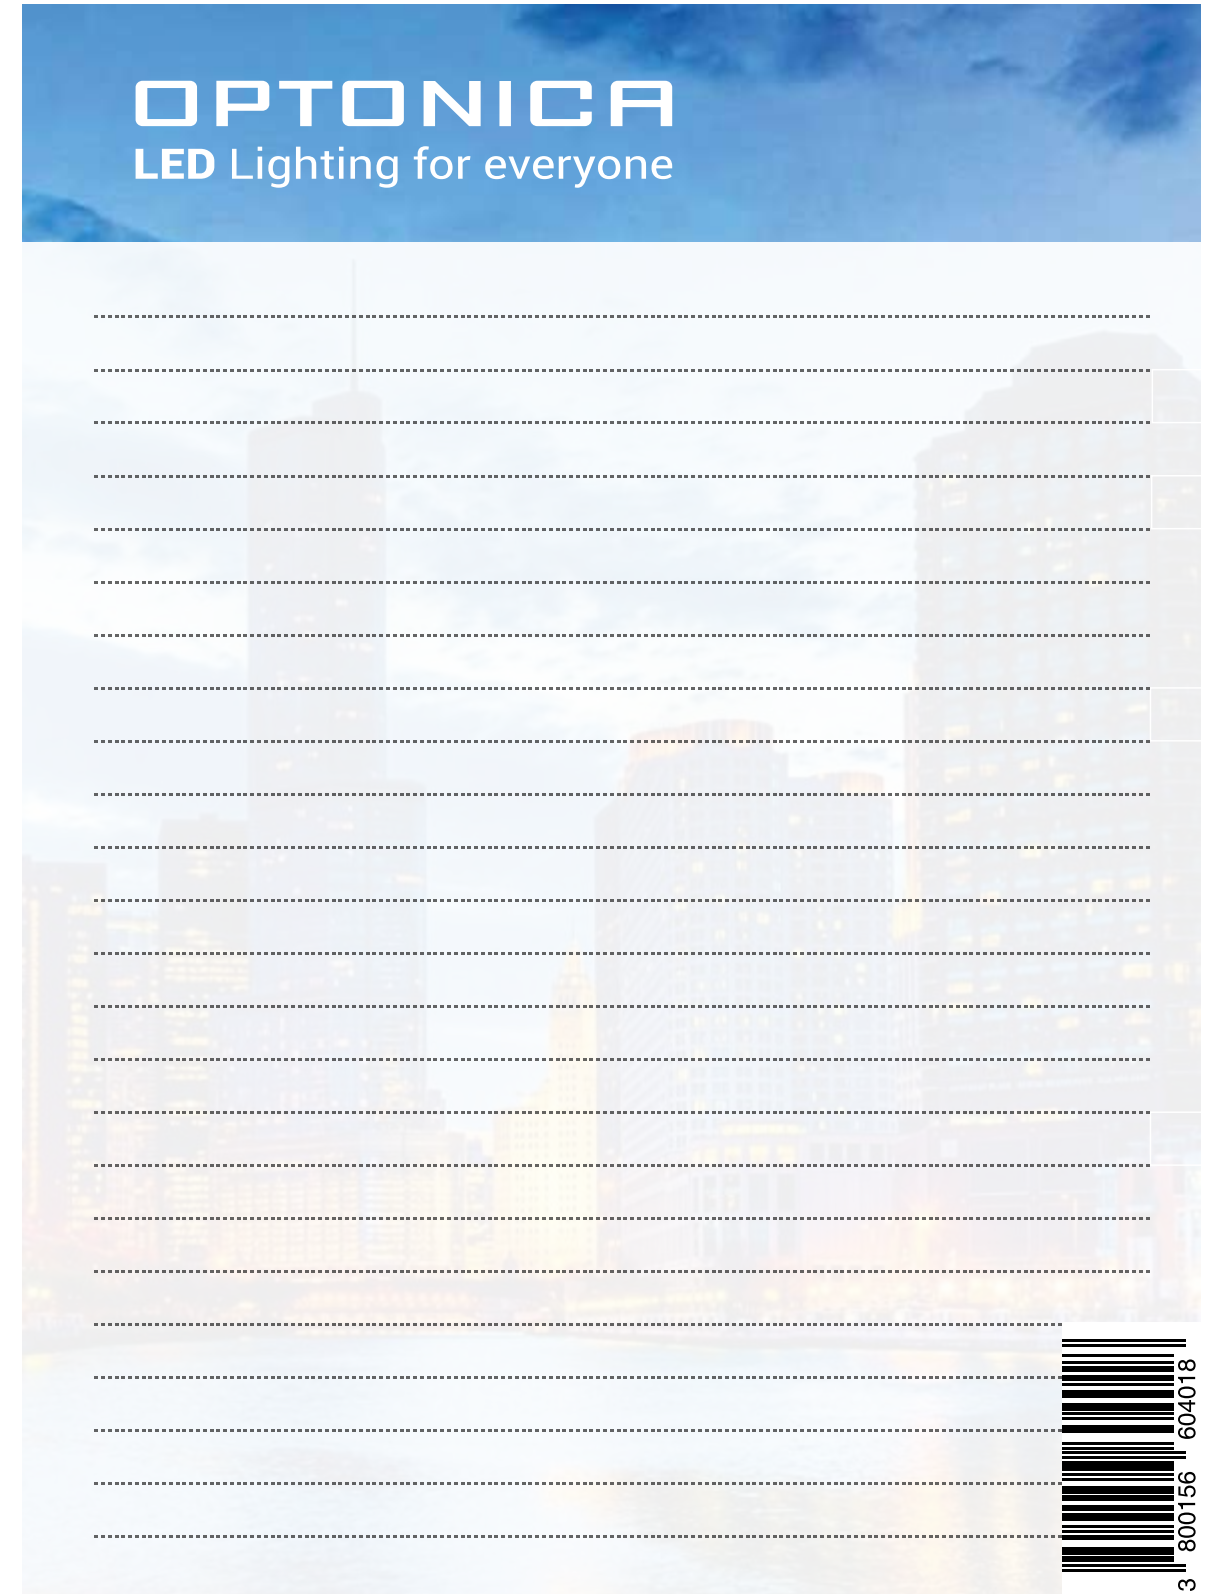



**OPTONICA**

[www.optonicaled.com](http://www.optonicaled.com)